



FINAL DRAFT

Technical Report

ISO/DTR 23247-100

Automation systems and integration — Digital twin framework for manufacturing —

Part 100: Use case on management of semiconductor ingot growth process

ISO/TC 184/SC 4

Secretariat: **ANSI**

Voting begins on:
2025-02-12

Voting terminates on:
2025-04-09

[ISO/DTR 23247-100](https://standards.iteh.ai/catalog/standards/iso/ee795da8-d0ff-4144-b517-478439da040f/iso-dtr-23247-100)

<https://standards.iteh.ai/catalog/standards/iso/ee795da8-d0ff-4144-b517-478439da040f/iso-dtr-23247-100>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO/DTR 23247-100](https://standards.iteh.ai/catalog/standards/iso/ee795da8-d0ff-4144-b517-478439da040f/iso-dtr-23247-100)

<https://standards.iteh.ai/catalog/standards/iso/ee795da8-d0ff-4144-b517-478439da040f/iso-dtr-23247-100>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2025

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Overview	2
5 Operational sequences	4
5.1 Process flow.....	4
5.2 Phase 1: Select and preparation.....	5
5.3 Phase 2: Melting and dopant addition.....	5
5.4 Phase 3: Seeding and crystal growth.....	6
5.5 Phase 4: Ingot pulling and initial testing.....	6
5.6 Phase 5: Documenting.....	7
6 Mapping to the framework	7
6.1 Overview.....	7
6.2 Implementation using the framework.....	8
6.3 Mapping of the process digital twin to the digital twin entity.....	10
6.4 Mapping of ingot growth equipment digital twin to digital twin entity.....	12
6.5 Mapping of ingot digital twin to digital twin entity.....	13
7 Conclusion	14
Bibliography	15

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO/DTR 23247-100](https://standards.iteh.ai/catalog/standards/iso/ee795da8-d0ff-4144-b517-478439da040f/iso-dtr-23247-100)

<https://standards.iteh.ai/catalog/standards/iso/ee795da8-d0ff-4144-b517-478439da040f/iso-dtr-23247-100>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 184, *Automation systems and integration*, Subcommittee SC 4, *Industrial data*.

A list of all parts in the ISO 23247 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

<https://standards.iteh.ai/catalog/standards/iso/ee795da8-d0ff-4144-b517-478439da040f/iso-dtr-23247-100>

Introduction

The semiconductor ingot growing process is an important step in the production of semiconductor wafers, which are used to manufacture electronic components such as integrated circuits and solar cells.

Despite advancements in automated ingot growth equipment, the conventional ingot growth process continues to face challenges due to the degree of human intervention required, it often relies on operators' experience and know-how. This dependence can lead to issues such as inaccurate quality, inconsistent machine setup, unstable temperature maintenance, and inconsistent melting.

A digital twin for the ingot growth process can effectively address these issues by simulating and optimizing the entire process in a virtual environment and reducing reliance on manual intervention.

Using a digital twin for monitoring and controlling the ingot growth process offers several advantages as follows:

- Real-time monitoring: a digital twin allows continuous and real-time monitoring of the ingot growth process. It provides detailed insights into key parameters such as temperature, growth rate, crystal quality, and dopant concentration. This enables operators to detect deviations or anomalies early on and take necessary corrective actions promptly.
- Process optimization: by analysing the data collected for the digital twin, it becomes possible to optimize the ingot growth process. Patterns and trends can be identified, allowing for adjustments in various parameters to improve yield, reduce defects and enhance the overall quality of the ingots and resulting wafers.
- Predictive maintenance: a digital twin can help predict maintenance requirements for the equipment used in the ingot growth process. By monitoring equipment performance and analysing historical data, the digital twin can help identify potential issues or deterioration in advance, enabling proactive maintenance and minimizing unplanned downtime.
- Training and simulation: a digital twin can be used for training operators and engineers. It provides a virtual environment where individuals can practice and simulate different scenarios without the need for actual physical equipment. This helps in enhancing operational skills, testing new strategies, and improving decision-making capabilities.

By leveraging the advantages of a digital twin, semiconductor manufacturers can gain deeper insights into the ingot growth process, optimize production parameters, enhance quality control, and improve overall productivity and efficiency.

Automation systems and integration — Digital twin framework for manufacturing —

Part 100:

Use case on management of semiconductor ingot growth process

1 Scope

This document describes a digital twin for monitoring and controlling the semiconductor ingot growth process. The use case is analysed and designed using the ISO 23247 series. The result is a systematic view of the use case implementation and a high-level design of the digital twins, which can be directly implemented using the readily available tools and languages, including those supported by the relevant standards.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 23247-1, *Automation systems and integration — Digital twin framework for manufacturing — Part 1: Overview and general principles* (<https://standards.iteh.ai/>)

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 23247-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

ingot

large, single crystal of semiconductor material, typically silicon, that serves as the starting material for the production of semiconductor wafers

Note 1 to entry: The ingot is grown through a process called ingot growth, where high-purity silicon is melted and then slowly solidified to form a large cylindrical crystal. This crystal is typically several inches in diameter and can be several feet long, depending on the intended use and requirements.

Note 2 to entry: The ingot is the primary raw material from which individual semiconductor wafers are cut. These wafers undergo further processing steps to fabricate electronic components such as integrated circuits (ICs) or solar cells. The quality and characteristics of the ingot, including its crystalline structure and impurity levels, play a crucial role in determining the performance and reliability of the resulting semiconductor devices.

3.2

ingot growth process

crystal growth process


step in semiconductor manufacturing where high-purity silicon is melted to grow a crystal

Note 1 to entry: In this process, a small single crystal called a “seed crystal” is carefully placed on molten silicon, and as the seed crystal is slowly withdrawn, silicon atoms from the molten phase arrange themselves in an ordered lattice structure, forming a larger crystal.

Note 2 to entry: The growth is controlled by parameters such as temperature and pulling rate, resulting in the uniform and high-quality growth of the silicon crystal. The grown crystal is then used to produce semiconductor wafers.

4 Overview

The semiconductor ingot growth process is an important step in semiconductor wafer production. [Figure 1](#) presents the conventional procedures of the ingot growth process.

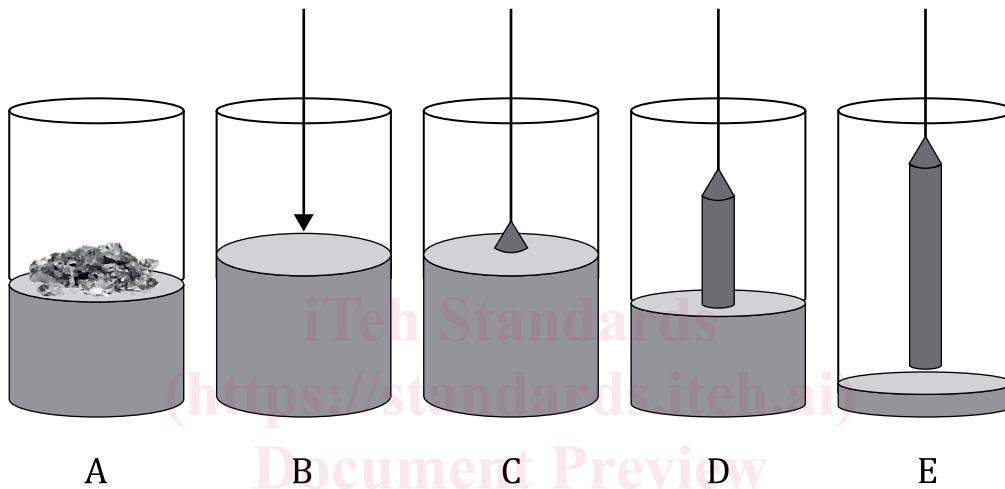

Key

- A melting of polysilicon, doping
- B introduction of the seed crystal
- C beginning of the crystal growth
- D crystal pulling
- E formed crystal with a residue of melted silicon

Figure 1 — Ingot growth process

The conventional procedures of the ingot growth process are as follows:

Despite advancements in automated ingot growth equipment, the conventional ingot growth process continues to face challenges due to the degree of human intervention required, the process often relies on operators' experience and know-how. This dependence can lead to issues such as inaccurate material quality, inconsistent machine setup, unstable temperature maintenance and inconsistent melting.

A digital twin for the ingot growth process can effectively address these issues by simulating and optimizing the entire process in a virtual environment. Using a digital twin enables predictive modeling and real-time adjustments that enhance quality control and process stability.

Furthermore, by reducing reliance on manual intervention, digital twins facilitate a more consistent application of best practices and compliance with industry standards, ultimately leading to improved efficiency and reduced operational costs.

[Table 1](#) summarizes the drawbacks and advantages of the conventional ingot growth process and the solutions offered by a digital twin.

Table 1 — Comparison of conventional ingot growth process and digital twin solutions

Stages of ingot growth process	Drawbacks of the conventional method	Solutions by digital twin	Advantages of the digital twin solution
Material selection	Dependence on human judgment for material quality	Automated material quality check using sensors and AI algorithms	Increased accuracy in material quality and reduced reliance on human judgment
Preparation of equipment	Manual cleaning and preparation can miss inconsistencies	Real-time monitoring and feedback for equipment preparation	Consistent equipment setup leading to standardized outcomes
Melting	Fluctuating temperature and inconsistent melting	Real-time temperature monitoring and AI-based adjustments	Stable and consistent melting process
Dopant addition	Inaccurate dopant concentrations due to manual operations	Precision-controlled dopant addition using feedback loops	Precise and consistent doping levels
Seeding the crystal	Potential misalignment of the seed crystal	Automated alignment with feedback systems	Perfect seed alignment, leading to better crystal quality
Crystal growth	Variability in growth rate and potential defects	AI-controlled growth rate based on real-time feedback	Consistent growth rate, reduced defects
Ingot pulling	Reliance on operator skill for pulling rate and parameters	Automated pulling with consistent parameters	Uniformity and quality of ingots
Testing and inspection	Manual inspection can miss subtle defects	Automated inspection using machine vision and AI	Higher defect detection rate and consistency

Integrating a digital twin into the ingot growth process can bring significant advantages and resolve challenges associated with conventional methodologies. It offers a more data-driven, predictive, and optimized approach, leading to better outcomes in terms of quality, efficiency, and safety.

[Table 2](#) describes the use case for the management of the semiconductor ingot growth process using a use case template given by ISO 23247-4:2021, Annex B.

Table 2 — Summary of the example for the management of the semiconductor ingot growth process

ID	Case number 100
Use case name	Management of the semiconductor ingot growth process
Application field	Smart manufacturing
Life cycle stage(s)/ phase(s) coverage	Production
Status	In-operation
Scope	Automated manufacturing process adjustment and tracking based on variable conditions of the ingot growth equipment (i.e. furnace)
Initial (problem) Situation	The ingot pulling process, the rate of pulling, temperature control and other parameters are carefully controlled to ensure uniformity and quality. This can be done by operator experience, process monitoring, feedback control system and closed-loop control system.
Objective(s)	Production of ingot ensuring uniformity and quality
	Developing a digital twin of the ingot growth process can provide the following:

Table 2 (continued)

<p>Short description (not more than 150 words)</p>	<ol style="list-style-type: none"> 1. Real-time monitoring: a digital twin allows continuous and real-time monitoring of the ingot growing process. It provides detailed insights into key parameters such as temperature, growth rate, crystal quality and dopant concentration. This enables operators to detect deviations or anomalies early on and take necessary corrective actions promptly. 2. Process optimization: by analysing the data collected for a digital twin, it becomes possible to optimize the ingot growing process. Patterns and trends can be identified, allowing for adjustments in various parameters to improve yield, reduce defects and enhance the overall quality of the ingots. 3. Predictive maintenance: by monitoring equipment performance and analysing historical data, a digital twin can identify potential issues or deterioration in advance, enabling proactive maintenance and minimizing unplanned downtime. 4. Training and simulation: digital twins can be used for training operators and engineers. They provide a virtual environment where individuals can practice and simulate different scenarios without the need for actual physical equipment. This helps in enhancing operational skills, testing new strategies, and improving decision-making capabilities.
<p>Stakeholders</p>	<p>Operators and ingot growth equipment vendors</p>
<p>Key technologies</p>	<p>Process automation and optimization for ingot growth</p>
<p>Relevant standards</p>	<p>ISO 23247 series, Digital twin framework for manufacturing</p>
<p>Standardization Needs</p>	<p>ISO 23247 digital twin framework for manufacturing to describe how the standards inter-operate on the shop floor</p>
<p>Remaining issues and future works</p>	<p>Parameter optimization for uniformity and quality of ingot through iterative learning control (ILC) and model predictive control (MPC)</p>

5 Operational sequences

5.1 Process flow

Figure 2 shows the process flow of the management of the semiconductor ingot growth process.