



SLOVENSKI STANDARD

SIST EN 300 959 V8.1.2:2003

01-december-2003

8 [[[HJb]`W] b]`hY_ca i b]_UW'g_]`g]ghYa `fZuU&ZL'Ä`AcXi `UW'Uf} GA `\$) '\$(ž
fUh`]WJ, "%&ž]nXUJ% - -

Digital cellular telecommunications system (Phase 2+) (GSM); Modulation (GSM 05.04
version 8.1.2 Release 1999)

iteh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **EN 300 959 Version 8.1.2**

SIST EN 300 959 V8.1.2:2003
[https://standards.iteh.ai/catalog/standards/sist/54d152a4-d19e-494e-b058-
de7a1cf8e63d/sist-en-300-959-v8-1-2-2003](https://standards.iteh.ai/catalog/standards/sist/54d152a4-d19e-494e-b058-
de7a1cf8e63d/sist-en-300-959-v8-1-2-2003)

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	--	---

SIST EN 300 959 V8.1.2:2003

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 959 V8.1.2:2003](https://standards.iteh.ai/catalog/standards/sist/34df32a4-d19e-494e-b058-de7a1cf8e63d/sist-en-300-959-v8-1-2-2003)

<https://standards.iteh.ai/catalog/standards/sist/34df32a4-d19e-494e-b058-de7a1cf8e63d/sist-en-300-959-v8-1-2-2003>

ETSI EN 300 959 V8.1.2 (2001-02)

European Standard (Telecommunications series)

Digital cellular telecommunications system (Phase 2+); Modulation (GSM 05.04 version 8.1.2 Release 1999)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

GSM®

GLOBAL SYSTEM FOR
MOBILE COMMUNICATIONS

[SIST EN 300 959 V8.1.2:2003](https://standards.iteh.ai/catalog/standards/sist/34df32a4-d19e-494e-b058-de7a1cf8e63d/sist-en-300-959-v8-1-2-2003)

<https://standards.iteh.ai/catalog/standards/sist/34df32a4-d19e-494e-b058-de7a1cf8e63d/sist-en-300-959-v8-1-2-2003>



Reference

REN/SMG-020504Q8

KeywordsDigital cellular telecommunications system,
Global System for Mobile communications (GSM)**ETSI**650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88**iTeh STANDARD PREVIEW**
(standards.iteh.ai)SIST EN 300 959 V8.1.2:2003<https://standards.iteh.ai/catalog/standards/sist/34df32a4-d19e-494e-b058-de7a1cf8e63d/sist-en-300-959-v8-1-2-2003>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.
All rights reserved.

Contents

Intellectual Property Rights	4
Foreword	4
1 Scope.....	5
1.1 References	5
1.2 Abbreviations.....	5
2 Modulation format for GMSK.....	5
2.1 Modulating symbol rate.....	5
2.2 Start and stop of the burst	5
2.3 Differential encoding.....	6
2.4 Filtering	6
2.5 Output phase	7
2.6 Modulation.....	7
3 Modulation format for 8PSK.....	7
3.1 Modulating symbol rate.....	7
3.2 Symbol mapping	7
3.3 Start and stop of the burst	8
3.4 Symbol rotation.....	9
3.5 Pulse shaping	9
3.6 Modulation.....	9
Annex A (informative): Change control history	10
History	11

[SIST EN 300 959 V8.1.2:2003](https://standards.iteh.ai/catalog/standards/sist/34df32a4-d19e-494e-b058-de7a1cf8e63d/sist-en-300-959-v8-1-2-2003)
<https://standards.iteh.ai/catalog/standards/sist/34df32a4-d19e-494e-b058-de7a1cf8e63d/sist-en-300-959-v8-1-2-2003>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Special Mobile Group (SMG).

The present document specifies the modulation format used within the digital cellular telecommunications system.

The contents of the present document may be subject to continuing work within SMG and may change following formal SMG approval. Should SMG modify the contents of the present document it will then be re-submitted for formal approval procedures by ETSI with an identifying change of release date and an increase in version number as follows:

Version 8.x.y

where:

- 8 GSM Phase 2+ Release 1999.
- x the second digit is incremented for changes of substance, i.e. technical enhancements, corrections, updates, etc.;
- y the third digit is incremented when editorial only changes have been incorporated in the specification.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 959 V8.1.2:2003
<https://standards.iteh.ai/catalog/standards/sist/34df32a4-d19e-494e-b058-de7a1cf8e63d/sist-en-300-959-v8-1-2-2003>

National transposition dates	
Date of adoption of this EN:	2 February 2001
Date of latest announcement of this EN (doa):	31 May 2001
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	30 November 2001
Date of withdrawal of any conflicting National Standard (dow):	30 November 2001

1 Scope

The modulator receives the bits from the encryption unit, see GSM 05.01 [1], and produces an RF signal. The filtering of the Radio Frequency (RF) signal necessary to obtain the spectral purity is not defined, neither are the tolerances associated with the theoretical filter requirements specified. These are contained in GSM 05.05 [4].

1.1 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.
- For this Release 1999 document, references to GSM documents are for Release 1999 versions (version 8.x.y).

- [1] GSM 01.04: "Digital cellular telecommunication system (Phase 2+); Abbreviations and acronyms"
- [2] GSM 05.01: "Digital cellular telecommunication system (Phase 2+); Physical layer on the radio path General description"
- [3] GSM 05.02: "Digital cellular telecommunication system (Phase 2+); Multiplexing and multiple access on the radio path"
- [4] GSM 05.05: "Digital cellular telecommunication system (Phase 2+); Radio transmission and reception".

1.2 Abbreviations

Abbreviations used in the present document are listed in GSM 01.04 [1].

2 Modulation format for GMSK

2.1 Modulating symbol rate

The modulating symbol rate is $1/T = 1\ 625/6$ ksymb/s (i.e. approximately 270.833 ksymb/s), which corresponds to 1 625/6 kbit/s (i.e. 270.833 kbit/s).

2.2 Start and stop of the burst

Before the first bit of the bursts as defined in GSM 05.02 [3] enters the modulator, the modulator has an internal state as if a modulating bit stream consisting of consecutive ones ($d_i = 1$) had entered the differential encoder. Also after the last bit of the time slot, the modulator has an internal state as if a modulating bit stream consisting of consecutive ones ($d_i = 1$) had continued to enter the differential encoder. These bits are called dummy bits and define the start and the stop of the active and the useful part of the burst as illustrated in figure 1. Nothing is specified about the actual phase of the modulator output signal outside the useful part of the burst.

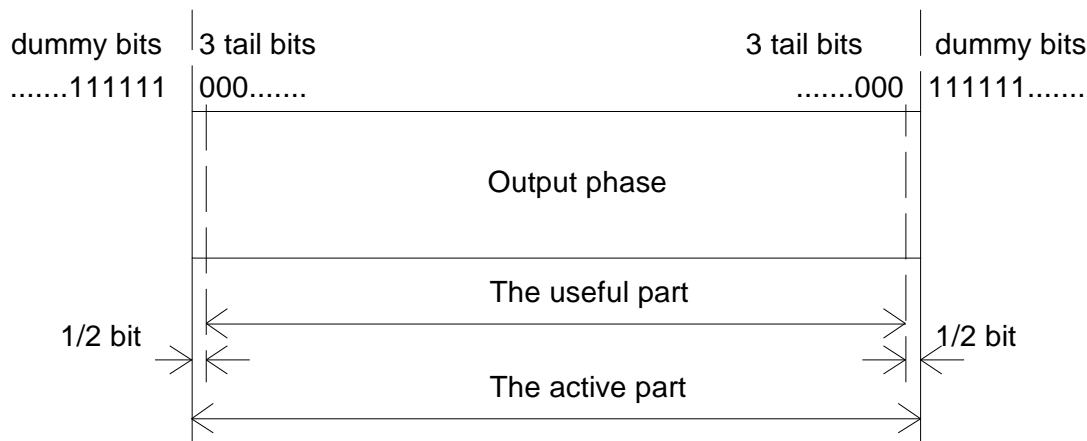


Figure 1: Relation between active part of burst, tail bits and dummy bits.
For the normal burst the useful part lasts for 147 modulating bits

2.3 Differential encoding

Each data value $d_i = [0, 1]$ is differentially encoded. The output of the differential encoder is:

$$d_i = d_i \oplus d_{i-1} \quad (d_i \in \{0, 1\})$$

where \oplus denotes modulo 2 addition.

The modulating data value α_i input to the modulator is:

$$\alpha_i = 1 - 2d_i \quad (\alpha_i \in \{-1, +1\})$$

2.4 Filtering

The modulating data values α_i as represented by Dirac pulses excite a linear filter with impulse response defined by:

$$g(t) = h(t) * \text{rect}\left(\frac{t}{T}\right)$$

where the function $\text{rect}(x)$ is defined by:

$$\text{rect}\left(\frac{t}{T}\right) = \frac{1}{T} \quad \text{for } |t| < \frac{T}{2}$$

$$\text{rect}\left(\frac{t}{T}\right) = 0 \quad \text{otherwise}$$

and $*$ means convolution. $h(t)$ is defined by:

$$h(t) = \frac{\exp\left(\frac{-t^2}{2\delta^2 T^2}\right)}{\sqrt{(2\pi) \cdot \delta T}}$$

where

$$\delta = \frac{\sqrt{\ln(2)}}{2\pi BT} \quad \text{and } BT = 0.3$$

where B is the 3 dB bandwidth of the filter with impulse response $h(t)$, and T is the duration of one input data bit. This theoretical filter is associated with tolerances defined in GSM 05.05 [4].

2.5 Output phase

The phase of the modulated signal is:

$$\varphi(t') = \sum_i \alpha_i \pi h \int_{-\infty}^{t'-iT} g(u) du$$

where the modulating index h is 1/2 (maximum phase change in radians is $\pi/2$ per data interval).

The time reference $t' = 0$ is the start of the active part of the burst as shown in figure 1. This is also the start of the bit period of bit number 0 (the first tail bit) as defined in GSM 05.02 [2].

2.6 Modulation

The modulated RF carrier, except for start and stop of the TDMA burst may therefore be expressed as:

$$x(t') = \sqrt{\frac{2E_c}{T}} \cdot \cos(2\pi f_0 t' + \varphi(t') + \varphi_0)$$

where E_c is the energy per modulating bit, f_0 is the centre frequency and φ_0 is a random phase and is constant during one burst.

<https://standards.iteh.ai/catalog/standards/sist/34df32a4-d19e-494e-b058-de7a1cf8e63d/sist-en-300-959-v8-1-2-2003>

3 Modulation format for 8PSK

3.1 Modulating symbol rate

The modulating symbol rate is $1/T = 1\ 625/6$ ksymb/s (i.e. approximately 270.833 ksymb/s), which corresponds to $3 \cdot 1\ 625/6$ kbit/s (i.e. 812.5 kbit/s).

3.2 Symbol mapping

The modulating bits are Gray mapped in groups of three to 8PSK symbols by the rule

$$s_l = e^{j2\pi l/8}$$

where l is given by table 1.