

TECHNICAL REPORT

High-voltage direct current (HVDC) systems – Guidance to the specification and design evaluation of AC filters –
Part 4: Equipment

Withhold

IEC TR 62001-4:2016

<https://standards.iteh.ai/standards/iec/cba1cc4e-8590-4dcd-90dc-d769ba1d51e7/iec-tr-62001-4-2016>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2016 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

TECHNICAL REPORT

High-voltage direct current (HVDC) systems – Guidance to the specification and design evaluation of AC filters – Part 4: Equipment

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.200

ISBN 978-2-8322-3400-6

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	6
INTRODUCTION	8
1 Scope	9
2 Steady state rating	9
2.1 General	9
2.2 Calculation method	9
2.2.1 General	9
2.2.2 AC system pre-existing harmonics	11
2.2.3 Combination of converter and pre-existing harmonics	11
2.2.4 Equipment rating calculations	12
2.2.5 Application of voltage ratings	15
2.3 AC network conditions	16
2.4 De-tuning effects	16
2.5 Network impedance for rating calculations	16
2.6 Outages	17
3 Transient stresses and rating	17
3.1 General	17
3.2 Switching impulse studies	18
3.2.1 Energization and switching	18
3.2.2 Faults external to the filter	19
3.2.3 Faults internal to the filter	21
3.2.4 Transformer inrush currents	21
3.3 Fast fronted waveform studies	21
3.3.1 General	21
3.3.2 Lightning strikes	21
3.3.3 Busbar flashover studies	22
3.4 Insulation co-ordination	22
4 Losses	23
4.1 Background	23
4.2 AC filter component losses	24
4.2.1 General	24
4.2.2 Filter/shunt capacitor losses	24
4.3 Reactor and resistor losses	25
4.3.1 General	25
4.3.2 Filter resistor losses	26
4.3.3 Shunt reactor losses	26
4.4 Criteria for loss evaluation	27
4.4.1 General	27
4.4.2 Fundamental frequency AC filter busbar voltage	27
4.4.3 Fundamental frequency and ambient temperature	27
4.4.4 AC system harmonic impedance	28
4.4.5 Harmonic currents generated by the converter	28
4.4.6 Pre-existing harmonic distortion	29
4.4.7 The anticipated load profile of the converter station	29
5 Design issues and special applications	29
5.1 General	29

5.2	Performance aspects	30
5.2.1	Low order harmonic filtering and resonance conditions with AC system	30
5.2.2	Definition of interference factors to include harmonics up to 5 kHz.....	31
5.2.3	Triple-tuned filter circuits	31
5.2.4	Harmonic AC filters on tertiary winding of converter transformers	32
5.3	Rating aspects	33
5.3.1	Limiting high harmonic currents in parallel-resonant filter circuits	33
5.3.2	Transient ratings of parallel circuits in multiple tuned filters	33
5.3.3	Overload protection of high-pass harmonic filter resistors	34
5.3.4	Back-to-back switching of filters or shunt capacitors.....	34
5.3.5	Short time overload – reasonable specification of requirements.....	34
5.3.6	Low voltage filter capacitors without fuses.....	36
5.4	Filters for special purposes	36
5.4.1	Harmonic filters for damping transient overvoltages.....	36
5.4.2	Non-linear filters for low order harmonics/transient overvoltages	36
5.4.3	Series filters for HVDC converter stations	37
5.4.4	Re-tunable AC filters.....	40
5.5	Impact of new HVDC station in vicinity of an existing station.....	41
5.6	Redundancy issues and spares	42
5.6.1	Redundancy of filters – savings in ratings and losses	42
5.6.2	Internal filter redundancy	43
5.6.3	Spare parts.....	43
6	Protection.....	44
6.1	Overview	44
6.2	General	44
6.3	Bank and sub-bank overall protection.....	46
6.3.1	General	46
6.3.2	Short circuit protection	46
6.3.3	Overcurrent protection	46
6.3.4	Thermal overload protection.....	46
6.3.5	Differential protection.....	47
6.3.6	Earth fault protection.....	47
6.3.7	Overvoltage and undervoltage protection	47
6.3.8	Special protection functions and harmonic measurements	48
6.3.9	Busbar and breaker failure protection.....	48
6.4	Protection of individual filter components.....	48
6.4.1	Unbalance protection for filter and shunt capacitors	48
6.4.2	Protection of low voltage tuning capacitors.....	50
6.4.3	Overload protection and detection of filter detuning	50
6.4.4	Temperature measurement for protection	50
6.4.5	Measurement of fundamental frequency components.....	50
6.4.6	Capacitor fuses.....	51
6.4.7	Protection and rating of instrument transformers	51
6.4.8	Examples of protection arrangements	52
6.5	Personnel protection	52
7	Audible noise	55
7.1	General	55
7.2	Sound active components of AC filters	55
7.3	Sound requirements	56

7.4	Noise reduction.....	57
8	Seismic requirements	58
8.1	General	58
8.2	Load specification	59
8.2.1	Seismic loads	59
8.2.2	Additional loads	59
8.2.3	Soil quality.....	60
8.3	Method of qualification	60
8.3.1	General	60
8.3.2	Qualification by analytical methods	60
8.3.3	Design criteria	61
8.3.4	Documentation for qualification by analytical methods	62
8.4	Examples of improvements in the mechanical design.....	62
9	Equipment design and test parameters	62
9.1	General	62
9.1.1	Technical information and requirements	62
9.1.2	Technical information to be provided by the customer.....	63
9.1.3	Customer requirements.....	63
9.1.4	Technical information to be presented by the bidder.....	65
9.1.5	Ratings	65
9.2	Capacitors	66
9.2.1	General	66
9.2.2	Design aspects	66
9.2.3	Electrical data.....	67
9.2.4	Tests	68
9.3	Reactors	68
9.3.1	General	68
9.3.2	Design aspects	69
9.3.3	Electrical data.....	70
9.3.4	Tests	71
9.4	Resistors	72
9.4.1	General	72
9.4.2	Design aspects	72
9.4.3	Electrical data.....	73
9.4.4	Tests	74
9.5	Arresters.....	75
9.5.1	General	75
9.5.2	Design aspects	76
9.5.3	Electrical data.....	76
9.5.4	Arresters: Tests	77
9.6	Instrument transformers	77
9.6.1	Voltage transformers.....	77
9.6.2	Current transformers.....	78
9.7	Filter switching equipment.....	80
9.7.1	Filter switching equipment: Introduction.....	80
9.7.2	Design aspects	80
9.7.3	Electrical data.....	83
9.7.4	Test requirements.....	84
Annex A	(informative) Background to loss evaluation	86

Annex B (informative) Example of response spectra (from IEEE Std 693-2005)	88
Bibliography	89
Figure 1 – Circuit for rating evaluation	10
Figure 2 – Inrush current into a 12/24 th double-tuned filter	19
Figure 3 – Voltage across the low voltage capacitor of a 12/24 th double-tuned filter at switch-on	19
Figure 4 – Voltage across the HV capacitor bank of a 12/24 th double-tuned filter under fault conditions	20
Figure 5 – Typical arrangements of surge arresters	22
Figure 6 – Non-linear low order filter for Vienna Southeast HVDC station	37
Figure 7 – Single-tuned series filter and impedance plot	38
Figure 8 – Triple-tuned series filter and impedance plot	38
Figure 9 – Mixed series and shunt AC filters at Uruguaiiana HVDC station	39
Figure 10 – Re-tunable AC filter branch	41
Figure 11 – Example of a protection scheme for an unearthed shunt capacitor	53
Figure 12 – Example of a protection scheme for a C-type filter	54
Figure 13 – Electrical spectrum	56
Figure 14 – Force spectrum	56
Figure B.1 – Response spectra	88
Table 1 – Typical losses in an all-film capacitor unit	24
Table 2 – Electrical data for capacitors	67
Table 3 – Electrical data for reactors	71
Table 4 – Electrical data for resistors	73
Table 5 – Electrical data for arresters	77
Table 6 – Electrical data for current transformers	79
Table 7 – Electrical data for filter switching equipment	84
Table A.1 – Capitalized costs of the future losses	86

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**HIGH-VOLTAGE DIRECT CURRENT (HVDC) SYSTEMS –
GUIDANCE TO THE SPECIFICATION AND DESIGN
EVALUATION OF AC FILTERS –****Part 4: Equipment**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC TR 62001-4, which is a Technical Report, has been prepared by subcommittee 22F: Power electronics for electrical transmission and distribution systems, of IEC technical committee 22: Power electronic systems and equipment.

This first edition of IEC TR 62001-4, together with IEC TR 62001-1, IEC TR 62001-2¹ and IEC TR 62001-3¹, cancels and replaces IEC TR 62001 published in 2009. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to IEC TR 62001:

- a) Clauses 10 to 16, 18, Annexes F and G have been expanded and supplemented.

The text of this document is based on the following documents:

Enquiry draft	Report on voting
22F/379/DTR	22F/385A/RVC

Full information on the voting for the approval of this document can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC TR 62001 series, published under the general title *High-voltage direct current (HVDC) systems – Guidance to the specification and design evaluation of AC filters*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

¹ To be published.

INTRODUCTION

IEC TR 62001 is structured in four parts:

Part 1 – Overview

This part concerns specifications of AC filters for high-voltage direct current (HVDC) systems with line-commutated converters, permissible distortion limits, harmonic generation, filter arrangements, filter performance calculation, filter switching and reactive power management and customer specified parameters and requirements.

Part 2 – Performance

This part deals with current-based interference criteria, design issues and special applications, field measurements and verification.

Part 3 – Modelling

This part addresses the harmonic interaction across converters, pre-existing harmonics, AC network impedance modelling, simulation of AC filter performance.

Part 4 – Equipment

This part concerns steady-state and transient ratings of AC filters and their components, power losses, audible noise, design issues and special applications, filter protection, seismic requirements, equipment design and test parameters.

HIGH-VOLTAGE DIRECT CURRENT (HVDC) SYSTEMS – GUIDANCE TO THE SPECIFICATION AND DESIGN EVALUATION OF AC FILTERS –

Part 4: Equipment

1 Scope

This part of IEC TR 62001, which is a Technical Report, provides guidance on the basic data of AC side filters for high-voltage direct current (HVDC) systems and their components such as ratings, power losses, design issues and special applications, protection, seismic requirements, equipment design and test parameters.

This document covers AC side filtering for the frequency range of interest in terms of harmonic distortion and audible frequency disturbances. It excludes filters designed to be effective in the power line carrier (PLC) and radio interference spectra.

It concerns the "conventional" AC filter technology and line-commutated HVDC converters.

2 Steady state rating


2.1 General

The calculation of the steady state ratings of the harmonic filter equipment is the responsibility of the contractor. Clause 2 gives guidance on the calculation of equipment rating parameters and the different factors to be considered in the studies. It is the responsibility of the customer to provide the appropriate system and environmental data and also to clarify the operational conditions, such as filter outages and network contingencies, which need to be taken into account.

2.2 Calculation method

2.2.1 General

Steady state rating of filter equipment is based on a solution of the following circuit which represents the HVDC converter, the filter banks and the AC supply system. See Figure 1.

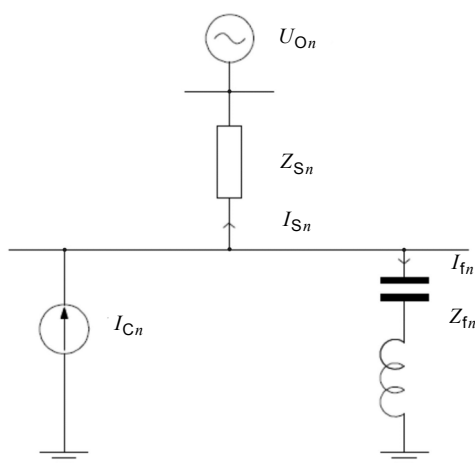

NOTE The symbols used in this figure are explained after Formula (1).

Figure 1 – Circuit for rating evaluation

The harmonic current flowing in the filter is the summation of two components, the contribution from the HVDC converter and the contribution from the AC supply network.

Using the principle of superposition, Formulae (1) and (2) can be used to evaluate the contribution to the harmonic filter current of order n from these two sources.

b) HVDC converter:

$$I_{fn}^i = \frac{Z_{sn}}{Z_{sn} + Z_{fn}} \cdot I_{cn} \tag{1}$$

where

I_{fn}^i is the filter harmonic current from the converter;

I_{cn} is the converter harmonic current;

I_{sn} is the system harmonic current;

Z_{fn} is the filter harmonic impedance;

Z_{sn} is the network harmonic impedance.

c) AC supply network:

$$I_{fn}^{ii} = \frac{U_{on}}{Z_{sn} + Z_{fn}} \tag{2}$$

where

I_{fn}^{ii} is the filter harmonic current from the system;

U_{on} is the existing system harmonic voltage.

The definition of network impedance is described in 2.5.

To solve Formulae (1) and (2), the following independent variables need to be known.

- The harmonic current (I_{cn}) produced by the rectifier or inverter of the HVDC station. It is calculated for all harmonics (see IEC TR 62001-1:2016, Clause 5). This evaluation should consider the worst-case operating conditions which can occur in steady state conditions, i.e. for periods in excess of 1 min. The extreme tolerance range of key parameters, for

example converter transformer impedances or operating range of the tap changer, needs to be taken into account. Harmonic interaction phenomena as discussed in IEC TR 62001-3:—, Clause 3, should also be taken into account.

- The pre-existing system harmonic voltage, as discussed in 2.2.2.
- The harmonic impedance of AC network (Z_{sn}), as discussed in IEC TR 62001-1:2016, 7.3. Note that different values of Z_{sn} can be defined for the calculation of I_{fn}^i and I_{fn}^{ii} , depending on how the pre-existing harmonic distortion is specified (see 2.2.3).

The harmonic impedance of the filter (Z_{fn}) needs to take account of the de-tuning and tolerance factors discussed in 2.4.

In the case of an HVDC link connecting two AC systems of different fundamental frequencies, and particularly if the link is a back-to-back station, both converters may generate currents on their AC sides at frequencies other than harmonics of the fundamental. The fundamental frequencies either may be nominally different, for example 50 Hz and 60 Hz, or may be nominally identical but differ at times by up to 1 Hz or 2 Hz. This additional generated distortion (interharmonics) will be at frequencies which are harmonics of the fundamental frequency of the remote AC system, and will be transferred across the link. Interharmonics may give rise to specific problems not found with true harmonics, such as

- interference with ripple control systems, and
- light flicker due to the low frequency amplitude modulation caused by the beating of a harmonic frequency with an adjacent interharmonic.

EXAMPLE A 10 Hz flicker due to the interaction of a 650 Hz 13th harmonic of a 50 Hz system with 660 Hz 11th harmonic penetration from a 60 Hz system.

The effect of interharmonics (see IEC TR 62001-1:2016 4.2.7), although small, should also be taken into account in the calculation of filter component rating.

2.2.2 AC system pre-existing harmonics

It is important that the effects of pre-existing harmonic distortion on the AC system are included in the filter rating calculations. Conventionally, this has been accommodated not by direct calculation as shown above, but by creating an arbitrary margin of a 10 % to 20 % increase in converter harmonic currents (I_{cn}). However, such an approach may not adequately reflect the low order harmonic distortion (typically 3rd, 5th and 7th) which exists on many power systems. As modern converter stations produce only small amounts of such low order harmonics, a simple enhancement of the magnitude may not adequately reflect their potential contribution to filter ratings.

To model a multiplicity of harmonic current sources in a detailed network model is impractical for the purposes of filter design. Therefore, it is proposed that a Thévenin equivalent voltage source is modelled behind the AC system impedance, as shown in Figure 1, to create an open circuit voltage distortion at the filter busbar, i.e. the level of distortion prior to connection of the filters. The magnitude of the individual harmonic voltages can be based on measurements or on the performance limits, but limited by a value of total harmonic distortion. This approach provides a more realistic assessment of the contribution to equipment rating caused by ambient distortion levels.

2.2.3 Combination of converter and pre-existing harmonics

As there is no fixed vectorial relationship between I_{fn}^i and I_{fn}^{ii} , it is proposed that these individual contributions to filter rating are summated on root sum square (RSS) basis at each harmonic:

$$I_{fn} = \sqrt{I_{fn}^{i2} + I_{fn}^{ii2}} \quad (3)$$

For pre-existing harmonics, of relatively low magnitude, RSS summation is reasonable, as some harmonics may be in phase and others not, and as these relationships will vary with time and operating conditions.

Alternatively, linear addition would provide greater security against the possibility of the contributions at a significant frequency being approximately in phase, but would entail an increase in cost, particularly if used for the voltage rating of the high voltage capacitors.

Linear addition should be considered for any pre-existing individual harmonic of such magnitude that linear addition would significantly affect the current rating of the components. Otherwise, if in practice the two sources were in phase for a period of time, the filter could trip on overcurrent protection. If linear addition is to be used, care should be taken to ensure that the conditions under which the two currents are calculated are consistent, i.e. the calculated currents can occur simultaneously in practice.

2.2.4 Equipment rating calculations

2.2.4.1 General

The total filter current is derived as above for each harmonic order from 2nd to 50th inclusive. It is important that this range is covered to ensure that any resonance conditions between the filters and the AC network and between different filters are inherently considered. Harmonics above the 50th order are unlikely to have a significant impact on the total rating values and can be ignored.

The calculation of I_{fn} for each connected filter allows the spectrum of harmonic currents in each branch of the filter to be evaluated. From this current data, individual element ratings can be calculated.

2.2.4.2 Capacitors

From the spectrum of currents in the capacitor bank (I_{fcn}), the total RSS current can be calculated as

$$I_c = \sqrt{\sum_{n=1}^{n=49} (I_{fcn})^2} \quad (4)$$

This current is used for capacitor fuse design, and both maximum and minimum values are required.

The magnitudes of the spectrum of most significant harmonic currents should be specified.

As the voltage rating of the high-voltage capacitors is the most significant factor in determining the total cost of the AC filters, the question of which formula is used to derive this rating should be carefully considered. There have been many discussions among utilities, consultants and manufacturers in the past regarding this point. The most conservative assumption in deriving a total rated voltage would be to assume that AC system resonance occurs at all harmonics and that all harmonics are in phase. However, the use of this assumption for an HVDC filter capacitor would result in an expensive design with a large margin between rated voltage and what would be experienced in reality. In practice, amplification due to filter-AC system resonance may take place at some harmonic frequencies, but not at most. Similarly, some harmonics may be in phase under some operating conditions, but in general the harmonics have an unpredictable phase relationship. Other approaches have therefore been formulated by HVDC users and manufacturers in an attempt to ensure an adequate design at a reasonable cost.