



**SLOVENSKI STANDARD**  
**SIST ISO 4292:1995**

**01-november-1995**

---

**Metode za ugotavljanje odstopka od krožnosti - Dvo- in tritočkovna metoda merjenja**

Methods for the assessment of departure from roundness -- Measurement by two- and three-point methods

**iTeh STANDARD PREVIEW**

Méthodes d'évaluation des écarts de circularité -- Mesurage par les méthodes en deux et trois points

[SIST ISO 4292:1995](https://standards.iteh.ai/catalog/standards/sist/cc405bb9-d158-4057-87d5-550c464e2b6/sist-iso-4292-1995)

**Ta slovenski standard je istoveten z: ISO 4292:1985**

---

**ICS:**

17.040.20      Lastnosti površin      Properties of surfaces

**SIST ISO 4292:1995**

**en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ISO 4292:1995

<https://standards.iteh.ai/catalog/standards/sist/cc405bb9-dd58-4057-87d5-53b8c464e2b6/sist-iso-4292-1995>

---

# International Standard



# 4292

---

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

---

## Methods for the assessment of departure from roundness — Measurement by two- and three-point methods

*Méthodes d'évaluation des écarts de circularité -- Mesurage par les méthodes en deux et trois points*

First edition — 1985-07-15

**ITeH STANDARD PREVIEW**  
(standards.iteh.ai)

[SIST ISO 4292:1995](https://standards.iteh.ai/catalog/standards/sist/cc405bb9-dd58-4057-87d5-53b8c464e2b6/sist-iso-4292-1995)

<https://standards.iteh.ai/catalog/standards/sist/cc405bb9-dd58-4057-87d5-53b8c464e2b6/sist-iso-4292-1995>

---

UDC 531.717

Ref. No. ISO 4292-1985 (E)

Descriptors: metrology, surface condition, roundness measurement, error analysis.

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 4292 was prepared by Technical Committee ISO/TC 57, *Metrology and properties of surfaces*.

**ITeH STANDARD PREVIEW**  
(standards.iteh.ai)

SIST ISO 4292:1995  
<https://standards.iteh.ai/catalog/standards/sist/cc405bb9-dd58-4057-87d5-53b8c464e2b6/sist-iso-4292-1995>

# Methods for the assessment of departure from roundness — Measurement by two- and three-point methods

## 1 Scope and field of application

This International Standard specifies methods of numerical assessment of out-of-roundness determined by the combination of two- and three-point measurement:

- a) determination by means of two-point measurement (measurement of diameters);
- b) determination by means of three-point measurement, summit (symmetrical or asymmetrical setting);
- c) determination by means of three-point measurement, rider (symmetrical setting).

Any statement regarding an out-of-round section is incomplete unless the extent and nature of the departures from roundness are given. Methods for making such descriptions and evaluating them are specified in ISO 4291.

For routine or in-process inspection, the procedure specified in ISO 4291 may either be needlessly accurate or the items to be inspected may be too large to be accommodated.

The methods specified give faster and cheaper ways of assessing departures from roundness. This assessed value will deviate from the true value. The difference between the measured value and the true value can be estimated with the help of tables 2 to 8, assuming that the undulation numbers are known and of sinusoidal nature. For non-sinusoidal undulations, a theory for estimating such deviations is not yet available.

## 2 References

ISO 4291, *Methods for the assessment of departure from roundness — Measurement of variations in radius*.

ISO 6318, *Measurement of roundness — Terms, definitions and parameters of roundness*.

## 3 Definitions

For the purpose of this International Standard, the definitions given in ISO 6318 and the following apply.

**3.1 two-point measurement:** Measurement between coaxial anvils, one fixed and one moving in the direction of measurement.

See figures 1 and 2.

**3.2 three-point measurement:** Measurement between anvils, two fixed and one moving in the direction of measurement.

See figures 3 to 8.

**3.2.1 summit method:** A three-point measurement in which the two fixed anvils are situated on one side and the measuring anvil is situated on the other side of the workpiece axis in the plane of measurement.

See figures 3, 4, 6 and 7.

**3.2.2 rider method:** A three-point measurement in which the two fixed anvils are situated on the same side as the measuring anvil in the plane of measurement.

See figures 5 and 8.

**3.3 symmetrical (three-point) setting:** A setting at which the direction of measurement coincides with the bisector angle between fixed anvils.

See figures 3, 5, 6 and 8.

**3.4 asymmetrical (three-point) setting:** A setting at which the direction of measurement constitutes an angle with the bisector angle between fixed anvils.

See figures 4 and 7.

## 4 Measurement

In order to cover all possible form deviations and numbers of undulations, a complete measurement should always consist of one two-point measurement and two three-point measurements at different angles between fixed anvils. In this International Standard, several alternatives are given when choosing angles between fixed anvils (see table 1). The measurement procedures may, under certain preconditions, be amplified. See tables 2 to 4.

Table 1 — Angles between fixed anvils

Symmetrical setting	Asymmetrical setting	
Angle between fixed anvils, $\alpha$	Angle between fixed anvils, $\alpha$	Angle between direction of measurement and bisector of angle between fixed anvils, $\beta$
90° and 120°	120°	60°
72° and 108°	60°	30°

The corrected value of the departure from roundness,  $\delta$ , is given by the equation

$$\delta = \frac{\Delta}{F}$$

where

$\Delta$  is the measured departure from roundness — it is the largest value obtained from the preceding two or three combinations of angles received in the required measurements;

$F$  is the correction factor — it has a value extracted from tables 2 to 8 (as a first approximation,  $F$  may be given a value of 2).

When measuring workpieces with a known even or odd number of undulations, the three-point measurement with symmetrical setting at 60° angles between fixed anvils may be used according to table 8. This angle is useful as it gives measured values of higher correction factors than the other angles in this International Standard. When using the 60° angle, the measured value shall be corrected with the factor  $F$  given in table 8.

## 5 Evaluation of measurement errors

Tables 5 to 7 give true factors  $F$  for any given number of sinusoidal undulations and measuring method.

If the number of sinusoidal undulations is known, the calculation of the departure from roundness is made by using the  $F$  factors directly from tables 5, 6, or 7 as indicated in tables 2, 3, or 4.

It is not possible to calculate exactly the departure from roundness if the number of undulations is unknown. In these cases a maximum, average and minimum value of  $\delta$  can be calculated from the equation in clause 4 using the largest  $\Delta$  value and the factors obtained from tables 2, 3 or 4.

There is a limit on the maximum number of undulations to be used when selecting  $F$ , according to whether the number of undulations is known and whether this number is an odd or even value. This precondition is shown in tables 2 to 4.

For 90° and 120° settings, the limit is 22, which assumes that a greater number of undulations than this will not have any appreciable effect on the factor  $F$ .

For 72° and 108° settings, the limit is determined by the fact that for 19 undulations the factor  $F$  cannot be determined.

Factors  $F$  for three-point measurement, symmetrical setting, are given in table 8.

NOTE — When using tables 5 to 8, other combinations of setting, besides those given in tables 2 to 4, can be made.

## 6 Measuring conditions and instrument

### 6.1 Measuring anvil static force

The static measuring force should not exceed 1 N. The force should, preferably, be adjustable and set at the lowest value that will ensure continuous contact between anvil and the surface being measured.

For thin-walled workpieces, a high measuring force may affect the measuring result. Therefore it is necessary to reduce the force to the minimum value possible.

### 6.2 Measuring anvils

Depending on the form of the object, the measuring anvil shall be selected from table 9, unless otherwise specified.

### 6.3 Fixed anvils

Point or line contact shall always be used. The following are recommended:

- for external measurement: V-support with a small radius; the median plane of the V-support shall be in the same plane as the plane of measurement.
- for internal measurement: sphere with a small radius; the median plane of the sphere shall be in the same plane as the plane of measurement.

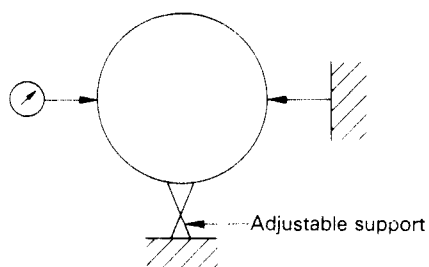


Figure 1 – Two-point measurement




Figure 2 – Two-point measurement

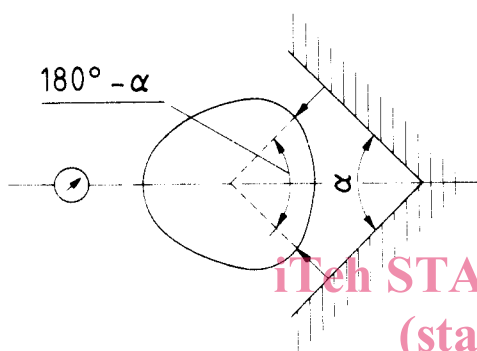


Figure 3 – Three-point measurement – Summit method – Symmetrical setting

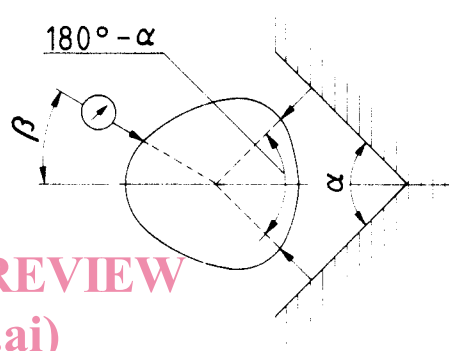


Figure 4 – Three-point measurement – Summit method – Asymmetrical setting

<https://standards.iteh.ai/catalog/standards/sist/cc405bb9-ud58-4057-87d5-53b8c464e2b6/sist-iso-4292-1995>

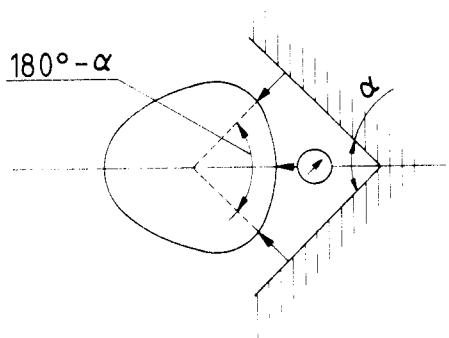


Figure 5 – Three-point measurement – Rider method – Symmetrical setting




Figure 6 – Three-point measurement – Summit method – Symmetrical setting




Figure 7 – Three-point measurement – Summit method – Asymmetrical setting




Figure 8 – Three-point measurement – Rider method – Symmetrical setting

Table 2 — 90° and 120°, symmetrical setting

Number of undulations, $n_s$	Combination of settings	2 <sup>1)</sup> and 3S 90° 2) and 3S 120° 3)		2 <sup>1)</sup> and 3R 90° 4) and 3R 120° 5)		2 <sup>1)</sup>	3S 90° 2) and 3S 120° 3)	3R 90° 4) and 3R 120° 5)
		Factors $F$						
$n_s$ unknown, but assumed to be $2 < n_s \leq 22$		max. 2,41 av. 1,95 min. 1,00		max. 2,41 av. 1,98 min. 1,00		—		—
$n_s$ even but unknown, but assumed to be $2 \leq n_s \leq 22$		—		—		2,00	max. 2,41 av. 1,47 min. 0,42	max. 2,41 av. 1,70 min. 1,00
$n_s$ odd but unknown, but assumed to be $3 \leq n_s \leq 21$		—		—		—	max. 2,00 av. 1,80 min. 1,00	max. 2,00 av. 1,80 min. 1,00
$n_s$ even and known		—		—		2,00	exact <sup>6)</sup>	exact <sup>6)</sup>
$n_s$ odd and known		—		—		—	exact <sup>6)</sup>	exact <sup>6)</sup>

1) Two-point measurement.

2) Three-point measurement, summit,  $\alpha = 90^\circ$ .3) Three-point measurement, summit,  $\alpha = 120^\circ$ .4) Three-point measurement, rider,  $\alpha = 90^\circ$ .5) Three-point measurement, rider,  $\alpha = 120^\circ$ .6) If multiplied by factors  $F$  according to table 5.

**STANDARD PREVIEW**  
(standards.iteh.ai)

SIST ISO 4292:1995

<https://standards.iteh.ai/catalog/standards/sist/cc405bb9-dd58-4057-87d5-53b8c464e2b6/sist-iso-4292-1995>

Table 3 — 72° and 108°, symmetrical setting

Number of undulations, $n_s$	Combination of settings	2 <sup>1)</sup> and 3S 72° 2) and 3S 108° 3)		2 <sup>1)</sup> and 3R 72° 4) and 3R 108° 5)		2 <sup>1)</sup>	3S 72° 2) and 3S 108° 3)	3R 72° 4) and 3R 108° 5)
		Factors $F$						
$n_s$ unknown, but assumed to be $2 < n_s \leq 18$		max. 2,62 av. 2,09 min. 1,38		max. 2,70 av. 2,11 min. 1,38		—	—	—
$n_s$ even but unknown, but assumed to be $2 \leq n_s \leq 22$		—		—		2,00	max. 2,70 av. 1,00 min. 0,38	max. 2,70 av. 1,04 min. 0,62
$n_s$ odd but unknown, but assumed to be $3 \leq n_s \leq 17$		—		—		—	max. 2,62 av. 2,06 min. 1,38	max. 2,62 av. 2,06 min. 1,38
$n_s$ even and known		—		—		2,00	exact <sup>6)</sup>	exact <sup>6)</sup>
$n_s$ odd and known		—		—		—	exact <sup>6)</sup>	exact <sup>6)</sup>

1) Two-point measurement.

2) Three-point measurement, summit,  $\alpha = 72^\circ$ .3) Three-point measurement, summit,  $\alpha = 108^\circ$ .4) Three-point measurement, rider,  $\alpha = 72^\circ$ .5) Three-point measurement, rider,  $\alpha = 108^\circ$ .6) If multiplied by factors  $F$  according to table 6.



Table 4 – 60°/30° and 120°/60°, asymmetrical setting

Number of undulations. $n_s$	Combination of settings		2 <sup>1)</sup>	2 <sup>1)</sup>	2 <sup>1)</sup>	2 <sup>1)</sup>	2 <sup>1)</sup>	3S	3S
	and 3S	and 3S	and 3S	and 3S	and 3S	and 3S	and 3S	60°/30° 2)	120°/60° 4)
	60°/30° 2)	60°/30° 2)	120°/60° 4)	60°/30° 2)	120°/60° 4)	60°/30° 2)	120°/60° 4)	60°/30° 2)	120°/60° 4)
	Factors $F$								
$n_s$ unknown, but assumed to be $2 \leq n_s \leq 10$	2	max. 2,41 av. 2,04 min. 2,00	max. 2,38 av. 2,08 min. 2,00	max. 2,41 av. 2,13 min. 2,00	—	max. 2,00 av. 1,60 min. 0,73	max. 2,38 av. 1,69 min. 0,42		
$n_s$ unknown, but assumed to be $2 \leq n_s \leq 22$	—	max. 2,73 av. 2,07 min. 2,00	—	max. 2,41 av. 2,11 min. 2,00	—	—	—		
$n_s$ even but unknown, but assumed to be $2 \leq n_s \leq 22$	—	—	—	—	2	max. 2,73 av. 1,41 min. 0,73	max. 2,38 av. 1,45 min. 0,42		
$n_s$ odd but unknown, but assumed to be $3 \leq n_s \leq 9$	2	2	2	2	—	2	2		
$n_s$ odd but unknown, but assumed to be $3 \leq n_s \leq 21$	—	2	—	2	—	—	—		
$n_s$ even and known	—	—	—	—	2	exact 5 <sup>1)</sup>	exact 5 <sup>1)</sup>		
$n_s$ odd and known	—	—	—	—	—	exact 5 <sup>1)</sup>	exact 5 <sup>1)</sup>		

1) Two-point measurement.

2) Three-point measurement, summit,  $\alpha = 60^\circ$ ;  $\beta = 30^\circ$ .3) Three-point measurement, summit,  $\alpha = 90^\circ$  (symmetrical setting).4) Three-point measurement, summit,  $\alpha = 120^\circ$ ;  $\beta = 60^\circ$ .5) If multiplied by factors  $F$  according to table 7.

SIST ISO 4292:1995  
<https://standards.iteh.ai/catalog/standards/sist/cc405bb9-dd58-4057-87d5-53b8c464e2b6/sist-iso-4292-1995>