



Designation: C743 – 87 (Reapproved 2018)

Standard Test Method for Continuity of Porcelain Enamel Coatings¹

This standard is issued under the fixed designation C743; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

INTRODUCTION

This test provides a means to evaluate a porcelain enamel coating for pinholes, discontinuities, and insufficient application to better assess the ability of the coating to protect the substrate.

1. Scope

1.1 Porcelain enamel coatings are applied to metals to provide protection from corrosion as well as to enhance their appearance. This test method permits the easy detection of discontinuities and areas of light coverage, not readily seen by visual inspection, which limit the protection to the substrate. Somewhat similar tests applicable to the thicker glass coatings used for chemical reaction vessels are found in Test Methods C536 and C537.

1.2 Values stated in SI units are to be regarded as the standard. Inch-pound units are provided for information only.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards:*²

C536 Test Method for Continuity of Coatings in Glassed Steel Equipment by Electrical Testing

C537 Test Method for Reliability of Glass Coatings on Glassed Steel Reaction Equipment by High Voltage

¹ This test method is under the jurisdiction of ASTM Committee B08 on Metallic and Inorganic Coatings and is the direct responsibility of Subcommittee B08.12 on Materials for Porcelain Enamel and Ceramic-Metal Systems.

Current edition approved Oct. 1, 2018. Published October 2018. Originally approved in 1973. Last previous edition approved in 2014 as C743 – 87 (2014) ^{ϵ 1}. DOI: 10.1520/C0743-87R18.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

3. Terminology

3.1 *air-gap voltage*—voltage needed to arc through a defect that is open to both the surface of the porcelain enamel and the metal substrate. The length of the air gap is estimated by measuring the enamel thickness.

3.2 *overvoltage*—difference between an applied test voltage and the air-gap voltage for the porcelain enamel being tested.

3.3 *RMS voltage*—root mean square voltage, or “average” voltage, shown on ac test meters.

3.4 *peak voltage*—for ac meters, the voltage that will discharge across the air gap or across a defect. The peak voltage is the RMS voltage multiplied by 1.414.

4. Apparatus

4.1 A nondestructive coating thickness gage with a range of at least 0 to 0.5 mm in 0.03 mm increments (0 to 20 mils in 1.0 mil increments).

4.2 Either an ac or a dc high-voltage discharge test instrument with a continuously variable output voltage over the range of at least 0 to 4 kV as indicated on a built-in voltmeter. The instrument shall be capable of being set to 0.1 kV and shall have an insulated cable and probe and a means for indicating (light, meter, or bell) a voltage discharge. Before use in this test, the high-voltage discharge test instrument shall be calibrated in accordance with the procedure set forth in Annex A1.

4.3 A test probe constructed of 100 mesh wire gauze as illustrated in Fig. 1.

5. Test Specimens

5.1 Porcelain enameled specimens of any size may be used in this test. The enamel shall be removed from an edge or the back of the specimen to provide an electrical ground for the test instrument. If the probe is wider than the specimen, the edges of the specimen shall be masked with electrical insulating tape to prevent discharges from occurring at the edges where porcelain coverage may be light.

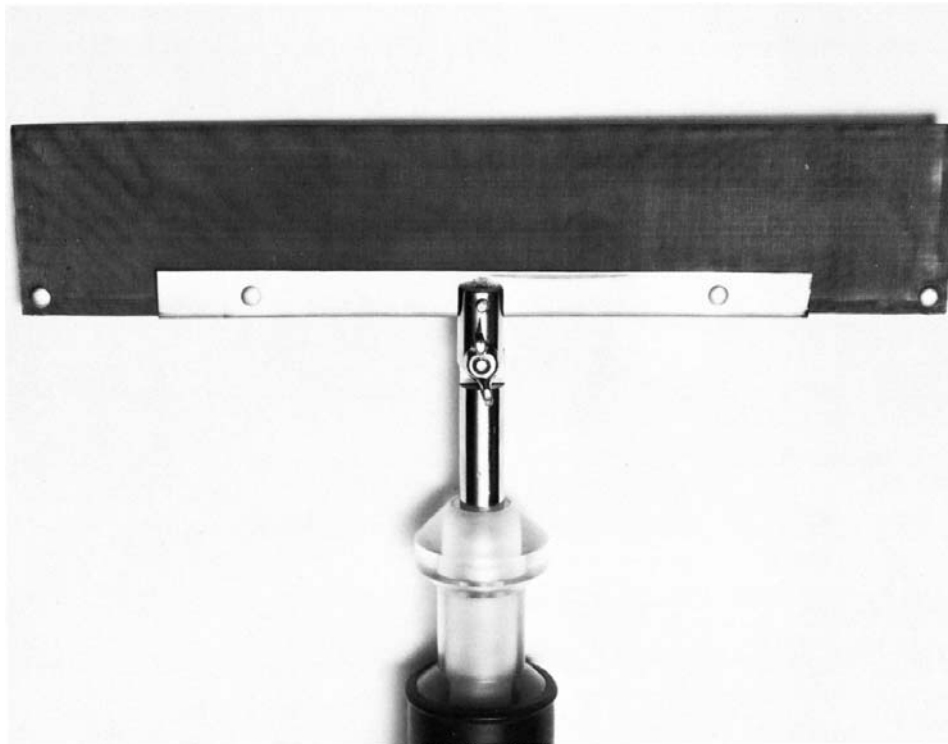


FIG. 1 Test Probe

6. Conditioning

6.1 Before testing, wash the specimens with a 1 weight % solution of trisodium phosphate on a soft cellulose sponge, rinse with tap water, and then rinse with distilled water. Then dry the specimens thoroughly in air.

7. Procedure

7.1 *Measuring the Enamel Thickness*—Measure the enamel thickness at a minimum of three locations on the specimen. Make these measurements to the nearest 0.03 mm (1.0 mil) in accordance with the operating instructions for the thickness gage. Use the maximum value obtained as the enamel thickness.

7.2 *Selecting the Test Voltage*—The test voltage to be used depends upon the purpose for conducting the test. The test can be used to determine (1) the presence of defects open to both the enamel surface and the base metal, (2) the location of areas of light coverage in addition to defects open to both the enamel surface and the base metal, or (3) compliance with a specification. According to the user's purpose for conducting the test, the following three instructions correspond respectively to (1), (2), or (3) above:

7.2.1 *Test Method A—For Open Defects:*

7.2.1.1 Determine the air-gap voltage that corresponds to the enamel thickness from the calibration curve described in the annex. This value is the test voltage.

7.2.1.2 Probe the specimen in accordance with 7.3.

7.2.2 *Test Method B—For Light Coverage and Open Defects:*

7.2.2.1 Determine the air-gap voltage that corresponds to the enamel thickness from the calibration curve described in the annex.

7.2.2.2 Arbitrarily select the overvoltage to be used. (Increasingly smaller defects are located with this test as the overvoltage is increased. Therefore, confidence that ware passing this test will have a long, corrosion-free service life is increased as the overvoltage is increased.)

7.2.2.3 Add the selected overvoltage to the air-gap voltage. This value is the test voltage.

7.2.2.4 Probe the specimen in accordance with 7.3.

7.2.3 *Test Method C—For Compliance with a Specification*—Specifications for continuity of coating will be in terms of dc overvoltage or peak ac overvoltage (these are identical). Determination of the test voltage depends on whether a dc or an ac test instrument is used.

7.2.3.1 *DC Test Instruments*—Determine the test voltage in accordance with 7.2.2, substituting the specified overvoltage for the selected overvoltage as in 7.2.2.2 and 7.2.2.3.

7.2.3.2 *AC Test Instruments*—Divide the specified overvoltage by 1.414, then determine the test voltage as in 7.2.2, substituting the specified overvoltage divided by 1.414 for the selected overvoltage as in 7.2.2.2 and 7.2.2.3.

7.2.3.3 Probe the specimen as shown in 7.3.

7.3 *Probing the Specimens:*

7.3.1 Connect the ground wire of test instrument to the base metal of the specimen.

7.3.2 Turn on the test instrument.