

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Fibre optic active components and devices – Performance standards –
Part 3: Modulator-integrated laser diode transmitters for 40-Gbit/s fibre optic
transmission systems

Composants et dispositifs actifs fibroniques – Normes de performances –
Partie 3: Émetteurs à diodes laser à modulateur intégré pour systèmes de
transmission fibroniques 40 Gbit/s



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2020 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22,000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67,000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Fibre optic active components and devices – Performance standards –
Part 3: Modulator-integrated laser diode transmitters for 40-Gbit/s fibre optic
transmission systems**

**Composants et dispositifs actifs fibroniques – Normes de performances –
Partie 3: Émetteurs à diodes laser à modulateur intégré pour systèmes de
transmission fibroniques 40 Gbit/s**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.180.20

ISBN 978-2-8322-8591-6

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD	3
INTRODUCTION	5
1 Scope	6
2 Normative references	6
3 Terms, definitions and abbreviated terms	7
3.1 Terms and definitions	7
3.2 Abbreviated terms	7
4 Product parameters	7
4.1 Absolute limiting ratings	7
4.2 Operating environment	8
4.3 Functional specification	8
4.4 Diagrams	10
5 Testing	10
5.1 General	10
5.2 Characterization testing	10
5.3 Performance testing	12
6 Environmental specifications	13
6.1 General safety	13
6.2 Laser safety	14
Bibliography	15
Figure 1 – Schematic diagram	10
Table 1 – Absolute limiting ratings	8
Table 2 – Operating environment	8
Table 3 – Operating conditions for functional specification	9
Table 4 – Functional specification	9
Table 5 – Characterization tests	11
Table 6 – Performance test plan	12
Table 7 – Recommended performance test failure criteria	13

iteh STANDARD PREVIEW
(standards.iteh.ai)

[IEC 62149-3:2020](https://standards.iteh.ai/catalog/standards/sist/5932d14e-8bc8-40c2-908a-e2b1bc8ba135/iec-62149-3-2020)

<https://standards.iteh.ai/catalog/standards/sist/5932d14e-8bc8-40c2-908a-e2b1bc8ba135/iec-62149-3-2020>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIBRE OPTIC ACTIVE COMPONENTS AND DEVICES –
PERFORMANCE STANDARDS –**
**Part 3: Modulator-integrated laser diode transmitters
for 40-Gbit/s fibre optic transmission systems**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62149-3 has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics.

This third edition cancels and replaces the second edition published in 2014 and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition: updates of the title, scope, normative references and performance test tables.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
86C/1666/FDIS	86C/1676/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62149 series, published under the general title *Fibre optic active components and devices – Performance standards*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 62149-3:2020](https://standards.iteh.ai/catalog/standards/sist/5932d14e-8bc8-40c2-908a-e2bfb8ba135/iec-62149-3-2020)

<https://standards.iteh.ai/catalog/standards/sist/5932d14e-8bc8-40c2-908a-e2bfb8ba135/iec-62149-3-2020>

INTRODUCTION

Fibre optic transmitters are used to convert electrical signals into optical signals. This document covers the performance standard for optical modulators monolithically integrated with laser diodes for 40 Gbit/s optical telecommunication systems. This document is applicable for on-off keying format.

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

[IEC 62149-3:2020](https://standards.iteh.ai/catalog/standards/sist/5932d14e-8bc8-40c2-908a-e2bfb8ba135/iec-62149-3-2020)

<https://standards.iteh.ai/catalog/standards/sist/5932d14e-8bc8-40c2-908a-e2bfb8ba135/iec-62149-3-2020>

FIBRE OPTIC ACTIVE COMPONENTS AND DEVICES – PERFORMANCE STANDARDS –

Part 3: Modulator-integrated laser diode transmitters for 40-Gbit/s fibre optic transmission systems

1 Scope

This part of IEC 62149 covers the performance specification for electroabsorption (EA) type optical modulators monolithically integrated with laser diodes for 40 Gbit/s fibre optic transmission systems. This document contains a definition of the product performance requirements together with a series of sets of tests and measurements with clearly defined conditions, severities and pass/fail criteria. The tests are intended to be run as an initial design verification to prove any product's ability to satisfy this document's requirements. This document is applicable for on-off keying format.

A product that has been shown to meet all the requirements of a performance standard can be declared as compliant with the performance standard but will then be controlled by a quality assurance program.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-2-1, *Environmental testing – Part 2-1: Tests – Test A: Cold*

IEC 60068-2-2, *Environmental testing – Part 2-2: Tests – Test B: Dry heat*

IEC 60068-2-6, *Environmental testing – Part 2-6: Tests – Test Fc: Vibration (sinusoidal)*

IEC 60068-2-14, *Environmental testing – Part 2-14: Tests – Test N: Change of temperature*

IEC 60068-2-27, *Environmental testing – Part 2-27: Tests – Test Ea and guidance: Shock*

IEC 60068-2-78, *Environmental testing – Part 2-78: Tests – Test Cab: Damp heat, steady state*

IEC 60749-7, *Semiconductor devices – Mechanical and climatic test methods – Part 7: Internal moisture content measurement and the analysis of other residual gases*

IEC 60749-26, *Semiconductor devices – Mechanical and climatic test methods – Part 26: Electrostatic discharge (ESD) sensitivity testing – Human body model (HBM)*

IEC 60825-1, *Safety of laser products – Part 1: Equipment classification and requirements*

IEC 60950-1, *Information technology equipment – Safety – Part 1: General requirements*

IEC 62007-1, *Semiconductor optoelectronic devices for fibre optic system applications – Part 1: Specification template for essential ratings and characteristics*

IEC 62572-3, *Fibre optic active components and devices – Reliability standards – Part 3: Laser modules used for telecommunication*

ITU-T Recommendation G.694.1, *Spectral grids for WDM applications: DWDM frequency grid*

ITU-T Recommendation G.957, *Optical interfaces for equipments and systems relating to the synchronous digital hierarchy*

MIL-STD-883-1, *U.S. Department of Defense – Test method standard – Environmental test methods for microcircuits, Part 1: Test methods 1000-1999*

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62007-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.2 Abbreviated terms

DC direct current

EA electroabsorption

LD laser diode

LSL lower standard limit

PD photodiode

PRBS pseudo-random bit sequence

RF radio frequency

RH relative humidity

USL upper standard limit

4 Product parameters

4.1 Absolute limiting ratings

Absolute limiting (maximum and/or minimum) ratings given in Table 1 imply that no catastrophic damage will occur if the product is subject to these ratings, provided each limiting parameter is in isolation and all other parameters have values within the normal performance parameters. It should not be assumed that limiting values of more than one parameter can be applied at any one time.

Table 1 – Absolute limiting ratings

Parameter	Symbol	Minimum	Maximum	Unit
Operating case temperature (at the bottom of the case)	T_{case}	0	+70	°C
Storage temperature	T_{stg}	-40	+85	°C
Soldering temperature (minimum distance to case specified)	T_{sld}		+260 (for 10 s)	°C
Laser diode				
Reverse voltage	$V_{R(LD)}$		2	V
Continuous forward current	$I_{F(LD)}$		200	mA
Continuous radiant power	ϕ_e		10	mW
Photodiode				
Reverse voltage	$V_{R(PD)}$		10	V
Forward current	$I_{F(PD)}$		1	mA
Modulator				
Reverse modulation voltage	V_{Rm}		5	V
Forward modulation voltage	V_{Fm}		1	V
Thermal electric cooler				
Cooler current under cooling and heating	I_p		1,5	A
Cooler voltage under cooling and heating	V_p		2,5	V

IEC 62149-3:2020

[https://standards.iteh.ai/catalog/standards/sist/5932d14e-8bc8-40c2-908a-](https://standards.iteh.ai/catalog/standards/sist/5932d14e-8bc8-40c2-908a-e2bfb8ba135/iec-62149-3-2020)

4.2 Operating environment

The operating environment is indicated in Table 2.

Table 2 – Operating environment

Parameter	Symbol	Value		Unit
		Minimum	Maximum	
Operating case temperature	T_{case}	0	+70	°C

4.3 Functional specification

Functional specification shall be within the limit specified in Table 4 at the operating conditions specified in Table 3.

Table 3 – Operating conditions for functional specification

Parameter	Symbol	Value		Unit
		Minimum	Maximum	
Laser operating current	I_{op}	50	200	mA
Laser operating temperature	T_{op}	15	35	°C
Reverse modulation centre voltage	V_{Rmc}	0,5	1,5	V
Peak to peak modulation voltage	V_{Rmpp}	2	3	V

NOTE Operating conditions are adjusted to match ITU-T Recommendation G.694.1 wavelength within the above specified limit.

Table 4 – Functional specification

Characteristics and conditions at $T_{LD} = T_{op}$, $I_{F(LD)} = I_{op}$ $V_{Rm} = 0$ V, unless otherwise stated		Symbol	Value		Unit
			Minimum	Maximum	
Laser and modulator diode					
Modulation speed		X		43,02 ^a	Gbit/s
Forward voltage at specified ϕ_e or I_{op}		$V_{F(LD)}$		2,2	V
Threshold current		$I_{(TH)}$		50	mA
Radiant power at specified I_{op}		ϕ_e	0,5		mW
Kink free radiant power		ϕ_e	0,6		mW
Extinction ratio at specified ϕ_e or I_{op} (under modulated conditions) ^b		r_{ER}	8,2		dB
Peak emission wavelength at specified ϕ_e or I_{op} (under modulated conditions) ^{b, c}		λ_P	c	c	nm
Side-mode suppression ratio at specified ϕ_e or I_{op} (under modulated conditions) ^b		r_{SMSR}	30		dB
Switching times at specified ϕ_e or I_{op} (under modulated conditions)		Rise time ^b	t_r	600/ X	ps
		Fall time ^b	t_f	600/ X	ps
RF return loss at specified ϕ_e or I_{op} ^d		S_{11}	6,0		dB
Transmission penalty due to dispersion at specified ϕ_e or I_{op} , under modulated conditions and specified fibre length ^b		P_e		2	dB
Monitor photodiode					
Dark current at $\phi_e = 0$ and specified $V_{R(PD)}$		I_{DARK}		10	nA
Monitor current at specified ϕ_e or I_{op} and $V_{R(PD)}$		I_M	50	2 000	µA
Tracking error between operating temperature range with reference at 25 °C at specified ϕ_e or I_{op} and $V_{R(PD)}$ specified		E_{tr}	–0,5	0,5	dB
Thermal sensor					
Resistance at specified sensor current		R_s	9,5	10,5	kΩ
Thermistor B constant ^e		B	3 300	3 950	K

Characteristics and conditions at $T_{LD} = T_{op}$, $I_{F(LD)} = I_{op}$ $V_{Rm} = 0$ V, unless otherwise stated	Symbol	Value		Unit
		Minimum	Maximum	
Thermal electric cooler				
Cooler current at $\Delta T = T_{case(max)} - T_{LD}$ and $\Delta T = T_{LD} - T_{case(min)}$ at specified ϕ_e or I_{op}	I_p		1,5	A
Cooler voltage at $\Delta T = T_{case(max)} - T_{LD}$ and $\Delta T = T_{LD} - T_{case(min)}$ at specified ϕ_e or I_{op}	V_p		2,5	V
a Upper limit in this document. Actual maximum modulation speed shall be designated by a system requirement. b Definition and condition according to ITU-T Recommendation G.957, PRBS 2 ²³ - 1, $V_{Rm} = V_{Rmc} \pm 1/2 V_{Rmpp}$. c According to ITU-T Recommendation G.694.1. d $V_{Rm} = 1/2 V_{Rmpp}$, 50 Ω termination, measurement frequency should be specified by system requirement. e $B = \ln(R/R_0)/(1/T - 1/T_0)$ where R is the resistance at ambient temperature T (K) and R_0 is the resistance at ambient temperature T_0 (K).				

4.4 Diagrams

Figure 1 provides a representative example of a schematic diagram.

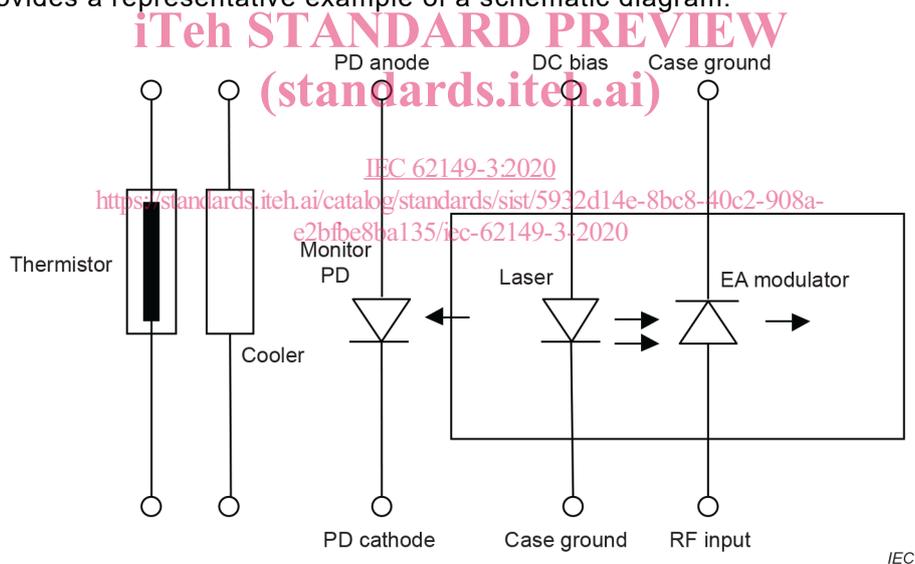


Figure 1 – Schematic diagram

5 Testing

5.1 General

Initial characterization and qualification shall be undertaken when a build standard has been completed and frozen. Qualification maintenance is carried using periodic testing programs. Case temperature conditions for all tests are 25 °C ± 2 °C unless otherwise stated.

5.2 Characterization testing

Characterization shall be carried out on at least 20 transmitters, taken from at least three different manufacturing lots. The test conditions are detailed in Table 5.