

INTERNATIONAL STANDARD



Eyewear display – iTeh STANDARD PREVIEW
Part 22-10: Specific measurement methods for AR type – Optical properties
(standards.iteh.ai)

[IEC 63145-22-10:2020](https://standards.iteh.ai/catalog/standards/sist/a4360eb5-993f-4873-9d36-e8579a47f24e/iec-63145-22-10-2020)

<https://standards.iteh.ai/catalog/standards/sist/a4360eb5-993f-4873-9d36-e8579a47f24e/iec-63145-22-10-2020>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2020 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

[IEC 63145-22-10:2020](https://standards.iec.ch/)

<https://standards.iec.ch/catalog/standards/sis/a4360cb5-993f-4873-9d36-e8579a47f24e/iec-63145-22-10-2020>

INTERNATIONAL STANDARD



Eyewear display – iTeh STANDARD PREVIEW
Part 22-10: Specific measurement methods for AR type – Optical properties
(standards.iteh.ai)

[IEC 63145-22-10:2020](https://standards.iteh.ai/catalog/standards/sist/a4360eb5-993f-4873-9d36-e8579a47f24e/iec-63145-22-10-2020)

<https://standards.iteh.ai/catalog/standards/sist/a4360eb5-993f-4873-9d36-e8579a47f24e/iec-63145-22-10-2020>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 17.180.99; 31.120

ISBN 978-2-8322-7737-9

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	4
1 Scope.....	6
2 Normative references	6
3 Terms, definitions, abbreviated terms and letter symbols.....	6
3.1 Terms and definitions.....	6
3.2 Abbreviated terms.....	7
3.3 Letter symbols (symbols for quantities, and units).....	7
4 Standard measurement conditions.....	7
4.1 Standard environmental conditions	7
4.2 Power supply	8
4.3 Warm-up time	8
4.4 Dark room condition.....	8
5 Measurement systems.....	8
5.1 Standard coordinate system.....	8
5.2 Measurement equipment.....	9
5.2.1 Light measuring device (LMD)	9
5.2.2 Stage condition.....	11
5.2.3 Setup conditions.....	11
5.3 Test patterns.....	13
5.3.1 General	13
5.3.2 Checkerboard pattern	13
5.4 Measuring points	13
6 Measurement methods.....	14
6.1 Spectral directional transmittance.....	14
6.1.1 General	14
6.1.2 Conditions	14
6.1.3 Procedure.....	15
6.1.4 Calculation	15
6.1.5 Report	16
6.2 Colour difference	16
6.2.1 General	16
6.2.2 Conditions	16
6.2.3 Procedure.....	17
6.2.4 Calculation	17
6.2.5 Report	17
6.3 Front side stray light	18
6.3.1 General	18
6.3.2 Conditions	18
6.3.3 Procedure.....	19
6.3.4 Calculation	20
6.3.5 Report	20
6.4 Contrast modulation.....	20
6.4.1 General	20
6.4.2 Conditions	20
6.4.3 Procedure.....	22
6.4.4 Calculation	22

ITeH STANDARD PREVIEW

(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/a4360eb5-993f-4873-9d36-e8579a47f24e/iec-63145-22-10-2020>

6.4.5 Report	22
Annex A (informative) See-through optical properties of AR eyewear displays	23
Annex B (informative) Response time of electronic dimming devices	24
Annex C (informative) Back side stray light.....	25
Bibliography.....	26
Figure 1 – Spherical coordinate system	9
Figure 2 – Three-dimensional Cartesian coordinate system	9
Figure 3 – Example of LMD structure	10
Figure 4 – Example of measuring setup for eyewear displays	12
Figure 5 – Example of 5 x 5 checkerboard pattern	13
Figure 6 – Measuring points for the centre- and multi-point measurements	14
Figure 7 – Setup of transmittance measurement	15
Figure 8 – Setup of haze measurement.....	19
Figure 9 – Example of contrast modulation test pattern.....	21
Figure 10 – Setup of contrast modulation measurement.....	22
Figure A.1 – Observed light under ambient lighting conditions	23
Figure B.1 – Response time of electronic dimming device (fall time).....	24
Figure B.2 – Response time of electronic dimming device (rise time).....	24
(standards.iteh.ai)	
Table 1 – Letter symbols (quantity symbols and units)	7
Table 2 – Measuring conditions	20

<https://standards.iteh.ai/catalog/standards/sist/a4360eb5-993f-4873-9d36-e8579a47f24e/iec-63145-22-10-2020>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

EYEWEAR DISPLAY –

Part 22-10: Specific measurement methods for AR type –
Optical properties

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
<https://standards.iteh.ai/catalog/standards/sist/a4360eb5-993f-4873-9d36->
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 63145-22-10 has been prepared by IEC technical committee 110: Electronic displays.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
110/1160/FDIS	110/1173/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 63145 series, published under the general title *Eyewear display*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 63145-22-10:2020](https://standards.iteh.ai/catalog/standards/sist/a4360eb5-993f-4873-9d36-e8579a47f24e/iec-63145-22-10-2020)

<https://standards.iteh.ai/catalog/standards/sist/a4360eb5-993f-4873-9d36-e8579a47f24e/iec-63145-22-10-2020>

EYEWEAR DISPLAY –

Part 22-10: Specific measurement methods for AR type – Optical properties

1 Scope

This part of IEC 63145 specifies the standard measurement conditions and measuring methods for determining the see-through optical properties and imaging quality of augmented reality (AR) eyewear displays. This includes the transmission characteristics and ambient optical performance of the eyewear displays.

Contact lens type displays are out of the scope of this document.

NOTE The relationship between the scope and other documents (IEC 63145-20-10, IEC 63145-22-10) is shown in Annex A.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/CIE 11664-5, *Colorimetry – Part 5: CIE 1976 $L^*u^*v^*$ colour space and u' , v' uniform chromaticity scale diagram*

3 Terms, definitions, abbreviated terms and letter symbols

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

NOTE 1 Terms related to eyewear displays will be defined in specific projects.

NOTE 2 Some terms relating to eyewear displays are given in IEC TR 63145-1-1 [1]¹

3.1.1

front side stray light

for light going to the eyes through the eyewear, light other than light effective for forming an image or a scenery

¹ Numbers in square brackets refer to the Bibliography.

3.2 Abbreviated terms

AR	augmented reality
CCD	charge-coupled device
CCFL	cold cathode fluorescent lamp
CPD	cycles per degree
DUT	device under test
FOV	field of view
LMD	light measuring device

NOTE The abbreviated terms refer to IEC TR 63145-1-1 [1], IEC 63145-20-10 [2], and IEC 63145-20-20 [3].

3.3 Letter symbols (symbols for quantities, and units)

The letter symbols are shown in Table 1.

Table 1 – Letter symbols (quantity symbols and units)

Quantities	Symbols and units
Measuring point ($i = 0$: centre)	P_i
Luminance	L_v (cd/m ²)
Maximum luminance	L_{vM} (cd/m ²)
Minimum luminance	L_{vm} (cd/m ²)
Luminance of the illuminating source without DUT	$L_{v,ill}$ (cd/m ²)
Luminance of the reference white standard	$L_{v,std}$ (cd/m ²)
CIE 1931 chromaticity coordinates at P_i	(x_i, y_i)
CIE 1931 chromaticity coordinates of the illuminating source without DUT	(x_{ill}, y_{ill})
Transmittance	$T_{0/0}$ (%)
Chromaticity difference	$\Delta u'v'_{0/0}$
Front side stray light	$H_{de/0}$ (%)
Contrast modulation	C_{CM}

4 Standard measurement conditions

4.1 Standard environmental conditions

Unless otherwise specified, all tests and measurements for eyewear displays shall be carried out after sufficient warm-up time for the illumination sources and the DUT (see 4.3), under the following standard environmental conditions:

- temperature 22 °C to 28 °C,
- relative humidity 25 % to 85 %, and
- atmospheric pressure 86 kPa to 106 kPa.

When different environmental conditions are used, they shall be reported in detail in the specification.

4.2 Power supply

In order to stabilize the performances of the DUT, the power supply for driving the DUT shall be adjusted according to the specification of the DUT.

NOTE When the DUT is driven by a battery, it is less susceptible to power supply fluctuations.

4.3 Warm-up time

The optical performances of the DUT are affected by the transient temperature behaviour of the device. It takes a certain time for the luminance output of the DUT to reach the steady state. If the luminance output is not within a ± 3 % variation, it shall be reported. All measuring conditions shall be kept constant during the measurements.

NOTE If the measuring result does not become a steady state, it might be influenced by the output fluctuation of the DUT and/or the fluctuation of the LMD such as noise.

4.4 Dark room condition

The luminance contribution from the background of the test room reflected off the measurement space shall be less than 1/20 of the minimum luminance output from the DUT. If this condition is not satisfied, then background luminance can be subtracted and it shall be reported.

5 Measurement systems

5.1 Standard coordinate system

To indicate the size and position of a virtual image, a spherical coordinate system of elevation (latitude) and azimuth (longitude) shall be used in the measurements; the polar axis is vertically oriented as shown in Figure 1. The angles measured in the vertical half planes of the data are elevation angles, denoted as α , and the horizontal angles to the half plane are azimuth angles, denoted as ψ . The origin direction ($\alpha = 0$, $\psi = 0$) of the spherical coordinate system shall be coincident with the optical axis of the DUT.

To indicate the positional relationship among the eye-box, the reference point on the DUT, eye point and eye relief of the DUT, the entrance pupil of the LMD and so on, a three-dimensional Cartesian coordinate system (x, y, z) shall be used, as shown in Figure 2. Unless specified otherwise, the eye point of the DUT is placed in the centre of the entrance pupil of the eye, which is in the centre of the iris. The eye point defines the origin of the coordinate system. The manufacturer or supplier of the DUT shall specify the distance between a reference point on the DUT and the eye point. The eye relief is defined as the distance from the cornea of the eye to the closest optical element of the DUT.

The origins of both the spherical coordinate system and the Cartesian coordinate system shall be located at the eye point.

NOTE In the case of a binocular eyewear display, the left eye can be used as the origin of the Cartesian coordinate system.


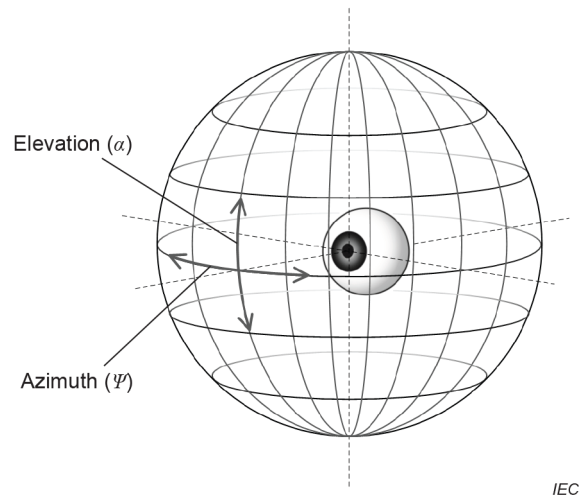


Figure 1 – Spherical coordinate system

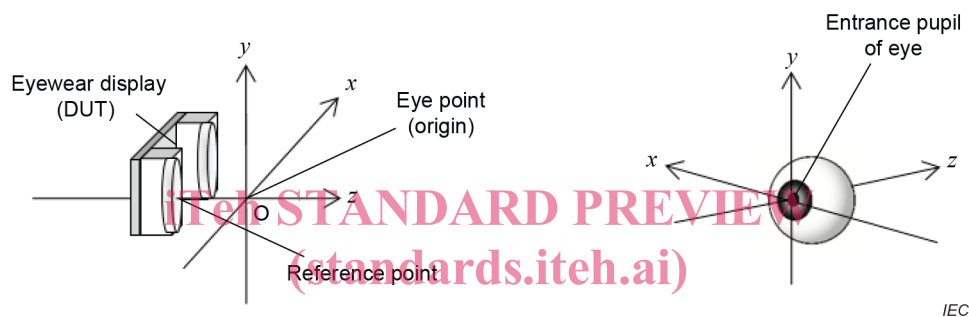

NOTE This figure is an example of the eye pupil adjusting to the eye point which is the origin position.

Figure 2 – Three-dimensional Cartesian coordinate system

5.2 Measurement equipment

5.2.1 Light measuring device (LMD)

5.2.1.1 General

The configurations and operating conditions of the equipment should comply with the structures specified in each item. To ensure accurate measurements, the following requirements shall be applied. Otherwise, the differences shall be noted in the report. ISO/CIE 19476 [9] describes the LMD evaluation procedures.

The optics of the LMD (a spot LMD or a 2D imaging LMD) shall be equivalent to the human eye, as shown in Figure 3. The LMD shall be equipped with a finder. The position of the entrance pupil (aperture) of the LMD shall be provided by the manufacturer or the supplier. The entrance pupil size of the LMD should be set between 2 mm and 5 mm, and shall be smaller than the light field projected by the DUT. The LMD to measure the optical characteristics such as luminance and colour shall be calibrated with the appropriate photometric or spectrometric standards. The LMD should be carefully checked before measurements, considering the following points:

- sensitivity of the measured quantity to the measuring light;
- errors caused by the veiling glare and lens flare (i.e., stray light in the optical system);
- timing of data-acquisition, low-pass filtering and aliasing-effects;
- linearity of detection and data-conversion;
- measurement field size.

NOTE See IEC TR 63145-1-1:2018 [1], 6.2.

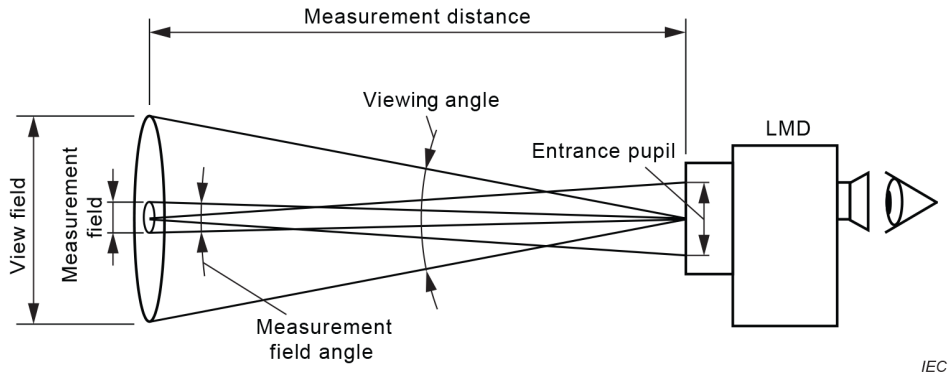


Figure 3 – Example of LMD structure

5.2.1.2 Spectrometer-type LMD

When a spectrometer-type LMD such as a spectroradiometer is used, the wavelength range shall be at least 380 nm to 780 nm, the spectral bandwidth shall be 5 nm or smaller, and the wavelength accuracy shall be 0,3 nm or smaller.

5.2.1.3 Filter-type LMD for measuring luminance

When a filter-type LMD such as a luminance meter is used, to ensure the luminance accuracy for the intended DUT light sources, its spectral responsivity should comply with the spectral luminous efficiency for CIE photopic vision or it should be compared with a calibrated spectrometer. The spectral mismatch correction factor can be applied, if necessary.

NOTE CIE- f_{λ} indicates the spectral mismatch function between the spectral responsivity of the filter-type LMD and the CIE photopic luminous efficiency function. Details of the spectral mismatch correction factor are given in ISO/CIE19476 [9].

5.2.1.4 Filter-type LMD for measuring colour

When a filter-type LMD such as a colorimeter is used, to ensure the colour accuracy for the intended DUT light sources, its spectral responsivity should comply with the CIE colour-matching functions for the CIE 1931 standard colorimetric observer (see ISO 11664-1 [7]) or it should be compared with a calibrated spectrometer. The colour correction factors can be applied, if necessary. The filter-type LMD shall not be used for absolute colour quantities but for relative colour quantities such as colour uniformity.

5.2.1.5 2D imaging LMD

The 2D imaging LMD (using a two-dimensional sensor such as a CCD) is a kind of a filter type LMD. The performances of the 2D imaging LMD shall comply with 5.2.1.3 and 5.2.1.4. The valid measurement field angle of the 2D imaging LMD shall be confirmed and the peripheral image of the 2D imaging LMD shall confirm the absence of vignetting. The number of pixels of the 2D imaging LMD should not be less than four times the sub-pixels number within the measurement field.

NOTE 1 The field of view of some 2D imaging LMDs is affected by the smaller entrance aperture.

NOTE 2 The 2D imaging LMD using a colour filter array might cause moiré.

NOTE 3 The 2D imaging LMD might not accurately represent the influence of eye rotation at larger viewing angles.