

SLOVENSKI STANDARD SIST EN 301 815-1 V1.1.1:2005

01-januar-2005

ü]fc_cdUgcjbc`X][]hUbc`cafYÿ^Y`n`]bhY[f]fUb]a]`ghcf]hjUa]`f6!=G8BL'Ë`Dfchc_c` X][]hUbY`bUfc b]ý_Y`g][bU]nUV]^Y`ýh''&`f8GG&L'Ë`FUhfYX`_U_cjcgh]`ghcf]hjY`]b]bX]_UV]^U`dUfUaYhfcj`df]`jndcghUj`^Ub^i`_`]WU#njYnY`Ë`%'`XY`.`GdYV]Z]_UV]^U dfchc_c`U`Qhf]dcfc]`]`=HI!H`E''&-*)'%f1%--L']b`E''&-*)''&`f1%--L'ZgdfYaYb^Yb]Q

Broadband Integrated Services Digital Network (B-ISDN); Digital Subscriber Signalling System No. two (DSS2) protocol; Quality of Service Class and Parameters indication at call/connection establishment; Part 1: Protocol specification [ITU-T Recommendations Q.2965.1 (1999) and Q.2965.2 (1999), modified] **DREVIEW**

(standards.iteh.ai)

<u>SIST EN 301 815-1 V1.1.1:2005</u> https://standards.iteh.ai/catalog/standards/sist/29448c1b-9d4e-485d-9b9d-656ac85334a4/sist-en-301-815-1-v1-1-1-2005

Ta slovenski standard je istoveten z: EN 301 815-1 Version 1.1.1

<u>ICS:</u>

33.080 Digitalno omrežje z integriranimi storitvami (ISDN) Integrated Services Digital Network (ISDN)

SIST EN 301 815-1 V1.1.1:2005

en

iTeh STANDARD PREVIEW (standards.iteh.ai)


<u>SIST EN 301 815-1 V1.1.1:2005</u> https://standards.iteh.ai/catalog/standards/sist/29448c1b-9d4e-485d-9b9d-656ac85334a4/sist-en-301-815-1-v1-1-1-2005

ETSI EN 301 815-1 V1.1.1 (2000-12)

European Standard (Telecommunications series)

Broadband Integrated Services Digital Network (B-ISDN); Digital Subscriber Signalling System No. two (DSS2) protocol; Quality of Service Class and Parameters indication at call/connection establishment; Part 1: Protocol specification

[ITU-T Recommendations Q.2965.1 (1999) and Q.2965.2 (1999), modified]

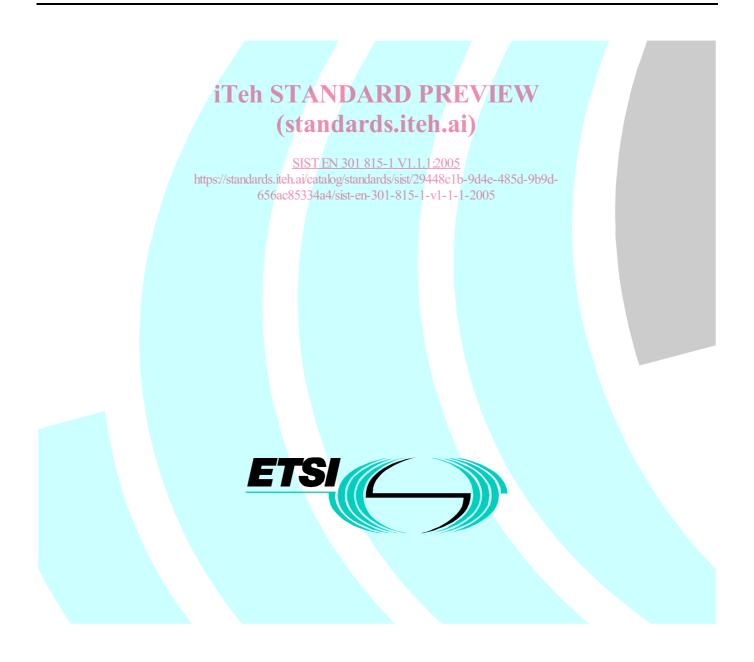

Reference DEN/SPAN-05251-1

Keywords B-ISDN, DSS2, quality

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88/ FFW

(standards.iteh.ai)

<u>SIST EN 301 815-1 V1.1.1:2005</u> https://standards.iteh.ai/catalog/standards/sist/29448c1b-9d4e-485d-9b9d-656ac85334a4/sist-en-301-815-1-v1-1-2005

Important notice

Individual copies of the present document can be downloaded from: http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at http://www.etsi.org/tb/status/

If you find errors in the present document, send your comment to: editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

> © European Telecommunications Standards Institute 2000. All rights reserved.

Contents

Intellectual Property Rights	4
Foreword	4
Endorsement notice	5
Modifications to ITU-T Recommendation Q.2965.1	5
Modifications to ITU-T Recommendation Q.2965.2	7
History	10

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST EN 301 815-1 V1.1.1:2005</u> https://standards.iteh.ai/catalog/standards/sist/29448c1b-9d4e-485d-9b9d-656ac85334a4/sist-en-301-815-1-v1-1-2005

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://www.etsi.org/ipr).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Services and Protocols for Advanced Networks (SPAN).

The present document is part 1 of a multi-part standard covering the Digital Subscriber Signalling System No. two (DSS2) protocol specification for the Broadband Integrated Services Digital Network (B-ISDN) to support Quality of Service Class and parameters indication at call/connection establishment, as described below:

Part 1: "Protocol specification [ITU-T Recommendations Q.2965.1 (1999) and Q.2965.2 (1999), modified]";

Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification".

(standards.iteh.al) National transposition dates				
Date of adoption of this EN:	SIST EN 301 815-1 V1.1.1:2005	24 November 2000		
https://standards.iteh.ai/catalog/standards/sist/29448c1b-9d4e-485d-9b9d- Date of latest announcement of this EN (doa); 34a4/sist-en-301-815-1-v1-1-2005 28 February 2001				
Date of latest publication of new National Standard				
or endorsement of this EN (dop/e):		31 August 2001		
Date of withdrawal of any conflicting N	lational Standard (dow):	31 August 2001		

Endorsement notice

The elements of ITU-T Recommendation Q.2965.1 (1999) and its Amendment 1 (2000) and ITU-T Recommendation Q.2965.2 (2000) apply, with the modifications identified below.

Modifications to ITU-T Recommendation Q.2965.1

Clause 1 (Scope)

Replace text with:

The present first part specifies the stage three of the Quality of Service (QoS) Class indication during call/connection establishment phase service for the pan-European Broadband Integrated Services Digital Network (B-ISDN) as provided by European public telecommunications operators at the T_B reference point or coincident S_B and T_B reference point (as defined in ITU-T Recommendation I.413 [10]) by means of the Digital Subscriber Signalling System No. two (DSS2) protocol. Stage three identifies the protocol and procedures and switching functions needed to support a telecommunication service.

In addition, the present document specifies the protocol requirements at the T_B reference point where the service is provided to the user via a private B-ISDN.

The present document does not specify the additional protocol requirements where the service is provided to the user via a telecommunications network that is not a B-ISDN.

The present document specifies the signalling protocol to indicate QoS Classes beyond those that are already specified in ITU-T Recommendation Q.2931 [2] as modified by EN 300 443-1 [11], for basic call/connection control. The capability described in the present document is also applicable to indicate the QoS Class and QoS parameters for the first party of a point-to-multipoint call/connections as specified in ITU-T Recommendation Q.2971 [3] as modified by EN 300 771-1 [12]. The capabilities in the present document are only applicable during the call/connection establishment phase.

Further parts of the present document specify the method of testing required to identify conformance to the present document.

The present document is applicable to equipment, supporting QoS Class and QoS Parameters indication during call/connection establishment phase, to be attached at either side of a T_B reference point or coincident S_B and T_B reference point when used as an access to the public B-ISDN.

The provision of these capabilities requires the support of the protocol for basic point-to-point call/bearer connection control as defined in EN 300 443-1 [11].

Clause 2 (Normative references), first paragraph

Replace the first paragraph with:

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Clause 2, end

Add the following references at the end of clause 2:

- [11] ETSI EN 300 443-1 (V1.3): "Broadband Integrated Services Digital Network (B-ISDN); Digital Subscriber Signalling System No. two (DSS2) protocol; B-ISDN user-network interface layer 3 specification for basic call/bearer control; Part 1: Protocol specification [ITU-T Recommendation Q.2931 (1995), modified]".
- [12] ETSI EN 300 771-1 (V2.0): "Broadband Integrated Services Digital Network (B-ISDN); Digital Subscriber Signalling System No. two (DSS2) protocol; B-ISDN user-network interface layer 3 specification for point-to-multipoint call/bearer control; Part 1: Protocol specification [ITU-T Recommendation Q.2971 (1995), modified]".
- [13] ETSI EN 301 068-1 (V1.2): "Broadband Integrated Services Digital Network (B-ISDN); Digital Subscriber Signalling System No. two (DSS2) protocol; Connection characteristics; ATM transfer capability and traffic parameter indication; Part 1: Protocol specification [ITU- Recommendations Q.2961.1 (1995), Q.2961.2 (1997), Q.2961.3 (1997), Q.2961.4 (1997) and Q.2961.6 (1997), modified]".
- [14] ETSI EN 301 487-1 (V1.1): "Broadband Integrated Services Digital Network (B-ISDN); Digital Subscriber Signalling No. two (DSS2) protocol; Switched virtual path capability; Part 1: Protocol Specification [ITU-T Recommendation Q.2934 (1999), modified]".
- [15] ITU-T Recommendation I.112 (1993): "Vocabulary of terms for ISDNs".

Throughout the text of ITU-T Recommendation Q.2965.1 and Amendment 1

	Tak					DT		٢.
Replace references as shown	in the fol	lowing table	ND	AK	U.	FF		

Reference in	standards.itehmodified reference
ITU-T Recommendation Q.2965.2	
ITU-T Recommendation Q.2931 [2]	ITU-T Recommendation Q.2931 as modified by EN 300 443-1 [11]
ITU-T Recommendation Q.2971 [3]	ITU-T Recommendation Q.2971 as modified by ETS 300 771-1 [12]
ITU-T Recommendation Q.2961.2 [4] 656a	ITU-T Recommendation Q.2961.2 as modified by EN 301 068-1 [13]
ITU-T Recommendation Q.2961.3 [6]	ITU-T Recommendation Q.2961.3 as modified by EN 301 068-1 [13]
ITU-T Recommendation Q.2961.4 [7]	ITU-T Recommendation Q.2961.4 as modified by EN 301 068-1 [13]
ITU-T Recommendation Q.2934 [9]	ITU-T Recommendation Q.2934 as modified by EN 301 487-1 [14]

Modifications to ITU-T Recommendation Q.2965.2

Clause 1 (Scope)

Replace text with:

The present first part specifies the stage three of the Quality of Service (QoS) Parameters indication during call/connection establishment phase service for the pan-European Broadband Integrated Services Digital Network (B-ISDN) as provided by European public telecommunications operators at the T_B reference point or coincident S_B and T_B reference point (as defined in ITU-T Recommendation I.413 [1]) by means of the Digital Subscriber Signalling System No. two (DSS2) protocol. Stage three identifies the protocol and procedures and switching functions needed to support a telecommunication service.

In addition, the present document specifies the protocol requirements at the T_B reference point where the service is provided to the user via a private B-ISDN.

The present document does not specify the additional protocol requirements where the service is provided to the user via a telecommunications network that is not a B-ISDN.

The present document specifies the signalling protocol to indicate QoS Classes beyond those that are already specified in ITU-T Recommendation Q.2931 [4] as modified by EN 300 443-1 [11], for basic call/connection control. The capability described in the present document is also applicable to indicate the individual QoS parameters for the first party of a point-to-multipoint call/connections as specified in ITU-T Recommendation Q.2971 [5] as modified by EN 300 771-1 [22]. The capabilities in the present document are only applicable during the call/connection establishment phase.

Further parts of the present document specify the method of testing required to identify conformance to the present document. (standards.iteh.ai)

The present document is applicable to equipment, supporting QoS parameters indication during call/connection establishment phase, to be attached at either side of a T_B reference point of coincident S_B and T_B reference point when used as an access to the public BISDNs.iteh.ai/catalog/standards/sist/29448c1b-9d4e-485d-9b9d-656ac85334a4/sist-en-301-815-1-v1-1-1-2005

The provision of these capabilities requires the support of the protocol for basic point-to-point call/bearer connection control as defined in EN 300 443-1 [21].

Clause 2 (Normative references), first paragraph

Replace the first paragraph with:

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Clause 2, end

Add the following references at the end of clause 2:

[21] ETSI EN 300 443-1 (V1.3): "Broadband Integrated Services Digital Network (B-ISDN); Digital Subscriber Signalling System No. two (DSS2) protocol; B-ISDN user-network interface layer 3 specification for basic call/bearer control; Part 1: Protocol specification [ITU-T Recommendation Q.2931 (1995), modified]".