



Designation: **C1369–07 (Reapproved 2014) C1369 – 19**

Standard Specification for Secondary Edge Sealants for Structurally Glazed Insulating Glass Units¹

This standard is issued under the fixed designation C1369; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This specification describes the properties of cold, liquid-applied, single or multi-component, chemically curing, elastomeric sealants used as the secondary seal of sealed insulating glass units, hereinafter referred to as the “sealant” (see Fig. 1). These sealants are intended to be a structural component of sealed insulating glass (IG) units used in structural sealant glazing (hereinafter referred to as SSG). Typical designs and considerations can be found in Guide C1249. Presently only certain silicone sealants are recognized as having the necessary durability for use as secondary sealant in IG units in SSG applications.

1.2 This specification does not describe all of the necessary properties of the sealant. Only those properties for which there are ASTM test methods and industry-agreed-upon minimum acceptable test requirements are described by this specification. Additional properties will be added as ASTM test methods for these properties become available.

1.3 This specification only addresses the durability of the secondary edge sealants for structurally glazed insulating glass units. Durability of sealed insulating glass units can be found in specifications and guides that reside within ASTM Committee E06.

1.4 The committee with jurisdiction for this standard is not aware of any comparable standard published by other organizations.

1.5 The values stated in SI units are to be regarded as the standard. The values given in parentheses are for information purposes only.

1.6 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards:*²

- C603 Test Method for Extrusion Rate and Application Life of Elastomeric Sealants
- C639 Test Method for Rheological (Flow) Properties of Elastomeric Sealants
- C661 Test Method for Indentation Hardness of Elastomeric-Type Sealants by Means of a Durometer
- C679 Test Method for Tack-Free Time of Elastomeric Sealants
- C717 Terminology of Building Seals and Sealants
- C792 Test Method for Effects of Heat Aging on Weight Loss, Cracking, and Chalking of Elastomeric Sealants
- C1135 Test Method for Determining Tensile Adhesion Properties of Structural Sealants
- C1184 Specification for Structural Silicone Sealants
- C1249 Guide for Secondary Seal for Sealed Insulating Glass Units for Structural Sealant Glazing Applications
- C1265 Test Method for Determining the Tensile Properties of an Insulating Glass Edge Seal for Structural Glazing Applications

3. Terminology

3.1 *Definitions*—Refer to Terminology C717 for definitions of the following terms used in this specification: chemically curing sealant, compatibility, cure, cured, elastomeric, hardness, non-sag sealant, sealant, ~~shelf life~~, shelf-life, silicone sealant, and substrate.

¹ This specification is under the jurisdiction of ASTM Committee C24 on Building Seals and Sealants and is the direct responsibility of Subcommittee C24.10 on Specifications, Guides and Practices.

Current edition approved June 1, 2014; Jan. 1, 2019. Published July 2014; January 2019. Originally approved in 1997. Last previous edition approved in 2007 as C1369–07–07 (2014). DOI: 10.1520/C1369-07R14; 10.1520/C1369-19.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard’s Document Summary page on the ASTM website.

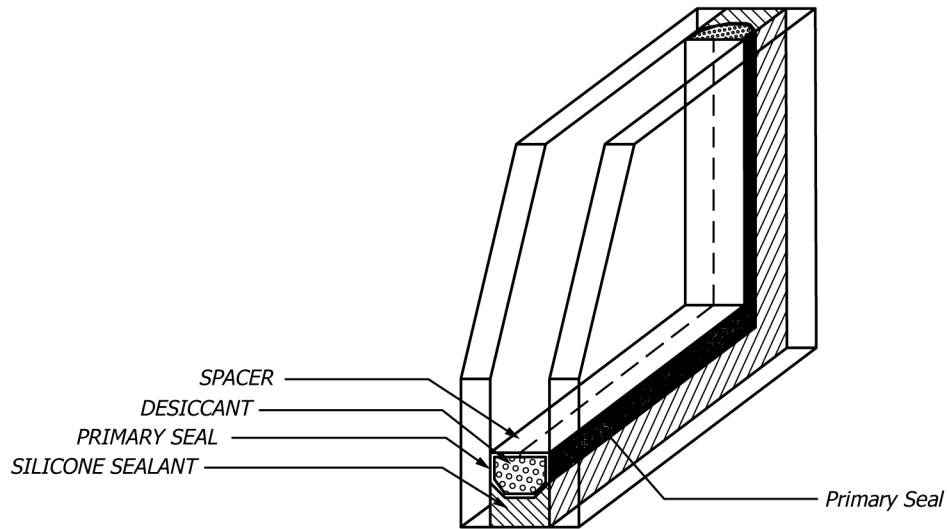


FIG. 1 Cutaway Section of IG Unit Edge Seal

4. Classification of Sealants

4.1 A sealant qualifying under this specification shall be classified as to type and use as follows:

4.1.1 *Type S*—A single-component sealant.

4.1.2 *Type M*—A multi-component sealant.

4.1.3 *Use G*—A sealant that meets the requirements of this specification when tested on clear, uncoated float glass substrates.

4.1.4 *Use O*—A sealant that meets the requirements of this specification when tested on coatings³ such as reflective and low-emissivity metallic materials applied to glass substrates.

5. Materials and Manufacture

5.1 Sealant:

5.1.1 Furnish single-component sealants as a homogeneous mixture of a consistency suitable for application. Apply the sealant in strict accordance with the written recommendations of the sealant manufacturer. The cured sealant shall be an elastomeric solid.

5.1.2 Multi-component sealants shall be mixed in the correct ratio⁴ of components and delivered by appropriate equipment as specified by the sealant manufacturer.

6. Requirements

6.1 The physical, mechanical, and performance properties of the sealant shall conform to the requirements described in **Table 1**.

6.2 The standard substrate for this specification is clear, uncoated float glass. If metallic coated⁵ glass substrates are to be qualified by this specification, they shall be tested by Test Method **C1135** as required in **8.1.6**.

6.3 The sealant shall be compatible with the components of the edge seal.

7. Significance and Use

7.1 Not all sealants meeting this specification should be presumed to be suitable for all applications and all substrates. This specification assists in selecting sealants that meet certain minimum standards of performance.

7.2 This specification does not evaluate the adhesion of the secondary sealant to the IG unit spacer. Adhesion of the secondary sealant to the spacer is generally considered necessary for the successful performance of the IG unit edge seal.

7.3 When specifying a sealant using this specification, it is essential that the applicable type and use also be included in the requirements. This will ensure that the proper sealant is provided for the intended use.

7.4 IG units qualified by this specification shall have a low moisture vapor transmission sealant for a primary seal and a structural silicone sealant for a secondary seal.

³ Reflective and low-emissivity metallic materials are typical coatings applied to the glass substrate. If the coatings are edge deleted for actual production, they should be edge deleted for use in this specification.

⁴ If the mix ratio of multi-component sealant is not within the sealant manufacturers recommendations, the cure rate, tack free time, cohesive strength, and adhesive strength of the sealant can be adversely affected.

⁵ Metallic coatings that require a sealed air space are typically edge deleted in regular production. They must also be edge deleted for this testing.