

INTERNATIONAL STANDARD



**Resistance welding equipment –
Part 2: Electromagnetic compatibility (EMC) requirements**

Standards
(<https://standards.iteh.ai>)
Document Preview

[IEC 62135-2:2020](https://standards.iteh.ai/catalog/standards/iec/02211ab3-ae87-4ef6-91d5-e3f4af90df45/iec-62135-2-2020)

<https://standards.iteh.ai/catalog/standards/iec/02211ab3-ae87-4ef6-91d5-e3f4af90df45/iec-62135-2-2020>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2020 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

[IEC 62135-2:2020](https://standards.iteh.ai/catalog/standards/iec/02211ab3-ae87-4ef6-91d5-e3f4af90df45/iec-62135-2-2020)

<https://standards.iteh.ai/catalog/standards/iec/02211ab3-ae87-4ef6-91d5-e3f4af90df45/iec-62135-2-2020>



IEC 62135-2

Edition 3.0 2020-03
REDLINE VERSION

INTERNATIONAL STANDARD



**Resistance welding equipment –
Part 2: Electromagnetic compatibility (EMC) requirements**

Standards
(<https://standards.iteh.ai>)
Document Preview

[IEC 62135-2:2020](https://standards.iteh.ai/catalog/standards/iec/02211ab3-ae87-4ef6-91d5-e3f4af90df45/iec-62135-2-2020)

<https://standards.iteh.ai/catalog/standards/iec/02211ab3-ae87-4ef6-91d5-e3f4af90df45/iec-62135-2-2020>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 25.160.30

ISBN 978-2-8322-8113-0

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	4
1 Scope	6
2 Normative references	7
3 Terms and definitions	8
4 General test requirements	11
4.1 Test conditions	11
4.2 Measuring instruments	11
4.3 Artificial mains network	11
4.4 Voltage probe	11
4.5 Antennas	11
5 Test set-up for emission and immunity	12
5.1 General requirements	12
5.2 Ancillary equipment	13
6 Emission tests	13
6.1 Classification of equipment	13
6.1.1 Class A equipment	13
6.1.2 Class B equipment	13
6.2 Test conditions	13
6.2.1 Test conditions for RF tests	13
6.2.2 Test conditions for low-frequency tests	14
6.3 Emission limits	14
6.3.1 Mains terminal disturbance voltage	14
6.3.2 Electromagnetic radiation disturbance	16
6.3.3 Low-frequency emission limits	19
6.3.4 Conducted emissions at signal, control and measurement ports	20
7 Immunity tests	20
7.1 Tests applicability	20
7.2 Test conditions	20
7.3 Immunity performance criteria	20
7.3.1 Performance criteria A	20
7.3.2 Performance criteria B	21
7.3.3 Performance criteria C	21
7.4 Immunity levels	21
8 Documentation for the purchaser/user	23
Annex A (informative) Limits	25
A.1 General	25
A.2 Mains terminal disturbance voltage limits	25
A.3 Electromagnetic radiation disturbance limits	26
A.4 Harmonic current limits	26
A.5 Limits for voltage fluctuations and flicker	26
Annex B (informative) Symbols	31
Annex C (normative) Battery powered equipment	32
C.1 General	32
C.2 Additional emission requirements	32
C.3 Additional immunity requirements	32

Annex D (normative) Equipment containing radio devices	33
D.1 General.....	33
D.2 Additional emission requirements.....	33
D.3 Additional immunity requirements	33
Bibliography.....	34
Figure 1 – Examples of ports	10
Figure 2 – Test position for H field measurement	12
Table 1 – Disturbance voltage limits – Idle state	15
Table 2 – Disturbance voltage limits for Class A equipment – Loaded state	16
Table 3 – Electromagnetic radiation disturbance limits – Idle state.....	17
Table 4 – Electromagnetic radiation disturbance limits for Class A equipment – Loaded state	18
Table 5 – Electric field radiation disturbance limits for Class B equipment – Loaded state	18
Table 6 – Magnetic field radiation disturbance limits for Class B equipment – Loaded state	19
Table 7 – In-situ electromagnetic radiation disturbance limits for Class A equipment – Loaded state.....	19
Table 8 – Immunity levels – Enclosure	22
Table 9 – Immunity levels – AC input power port.....	22
Table 10 – Immunity levels – Ports for measurement and control.....	23
Table A.1 – Mains terminal disturbance voltage limits, idle state
Table A.2 – Mains terminal disturbance voltage limits, load conditions.....
Table A.3 – Electromagnetic radiation disturbance limits, idle state
Table A.4 – Electromagnetic radiation disturbance limits, load conditions
Table A.5 – Magnetic field emission limits for Class B equipment
Table A.6 – Maximum permissible harmonic current for equipment with input current $I_{1CC} \leq 16$ A
Table A.7 – Current emission limits for equipment with 16 A $< I_{1CC} \leq 75$ A other than balanced three-phase equipment
Table A.8 – Current emission limits for balanced three-phase equipment with input current 16 A $< I_{1CC} \leq 75$ A
Table A.9 – Current emission limits for balanced three-phase equipment with input current 16 A $< I_{1CC} \leq 75$ A under specified conditions
Table A.10 – Current emission limits for balanced three-phase equipment with $I_{1CC} \leq 75$ A under specified conditions (d, e, f).....
Table A.11 – Limits for resistance welding equipment $I_{1CC} \leq 75$ A
Table B.1 – Symbols to describe EMC properties.....	31

INTERNATIONAL ELECTROTECHNICAL COMMISSION

RESISTANCE WELDING EQUIPMENT –

Part 2: Electromagnetic compatibility (EMC) requirements

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

International Standard IEC 62135-2 has been prepared by IEC technical committee 26: Electric welding.

This third edition cancels and replaces the second edition published in 2015. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) update of the applicable limits related to the updated references;
- b) implementation of radiated magnetic field requirements.

The text of this standard is based on the following documents:

FDIS	Report on voting
26/696/FDIS	26/698/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 62135 series, under the general title *Resistance welding equipment*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

RESISTANCE WELDING EQUIPMENT –

Part 2: Electromagnetic compatibility (EMC) requirements

1 Scope

This part of IEC 62135 is applicable to equipment for resistance welding and allied processes which are connected to mains supplies with rated voltages up to 1 000 V AC RMS. This document does not define safety requirements.

Resistance welding equipment type tested in accordance with, and which has met the requirements of, this document, is deemed to be in compliance for all applications.

The frequency range covered is from 0 Hz to 400 GHz.

Arc welding equipment containing a radio receiver or transmitter is within the scope of this document. Additional requirements for such equipment is specified in Annex D.

The radiated emission requirements in this document are not intended to be applicable to the intentional transmissions from a radio transmitter as defined by the ITU nor to any spurious emissions related to these intentional transmitters.

This product EMC standard for resistance welding equipment takes precedence over all aspects of the generic standards and no additional EMC tests are required or necessary.

NOTE 1 Typical allied processes are resistance hard and soft soldering or resistance heating achieved by means comparable to resistance welding equipment.

NOTE 2 Limit values are specified for only part of the frequency range.

Resistance welding equipment are classified as Class A and Class B equipment.

This part of IEC 62135 specifies

- a) test methods to be used in conjunction with CISPR 11:2015, CISPR 11:2015/AMD1:2016 and CISPR 11:2015/AMD2:2019 to determine radio-frequency (RF) emission;
- b) relevant standards and test methods for harmonic current emission, voltage fluctuation and flicker;
- c) additional requirements for equipment powered by internal or external batteries (Annex C).

NOTE 3 The limits in this document cannot, however, provide full protection against interference to radio and television reception when the resistance welding equipment is used closer than 30 m to the receiving antenna(e).

NOTE 4 In special cases, when highly susceptible apparatus is being used in close proximity, additional mitigation measures are sometimes employed to further reduce the electromagnetic emissions.

NOTE 5 The origins of the limit values in this document are summarized in Annex A.

This part of IEC 62135 also defines immunity requirements and test methods for continuous and transient, conducted and radiated disturbances including electrostatic discharges.

NOTE 6 These requirements do not, however, cover extreme cases which are extremely rare.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

~~IEC 60050-161, International Electrotechnical Vocabulary – Chapter 161: Electromagnetic compatibility~~

~~IEC 60050-851, International Electrotechnical Vocabulary – Part 851: Electric welding~~

IEC 61000-3-2:2014/2018, *Electromagnetic compatibility (EMC) – Part 3-2: Limits – Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)*

IEC 61000-3-3:2013, *Electromagnetic compatibility (EMC) – Part 3-3: Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection*
IEC 61000-3-3:2013/AMD1:2017

IEC 61000-3-11:2000/2017, *Electromagnetic compatibility (EMC) – Part 3-11: Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems – Equipment with rated current ≤ 75 A and subject to conditional connection*

IEC 61000-3-12:2011, *Electromagnetic compatibility (EMC) – Part 3-12: Limits for harmonic currents produced by equipment connected to public low-voltage systems with input current > 16 A and ≤ 75 A per phase*

IEC 61000-4-2:2008, *Electromagnetic compatibility (EMC) – Part 4-2: Testing and measurement techniques – Electrostatic discharge immunity test*

IEC 61000-4-3:2006, *Electromagnetic compatibility (EMC) – Part 4-3: Testing and measurement techniques – Radiated, radio-frequency, electromagnetic field immunity test*
IEC 61000-4-3:2006/AMD1:2007
IEC 61000-4-3:2006/AMD2:2010

IEC 61000-4-4:2012, *Electromagnetic compatibility (EMC) – Part 4-4: Testing and measurement techniques – Electrical fast transient/burst immunity test*

IEC 61000-4-5:2014, *Electromagnetic compatibility (EMC) – Part 4-5: Testing and measurement techniques – Surge immunity test*
IEC 61000-4-5:2014/AMD1:2017

IEC 61000-4-6:2013, *Electromagnetic compatibility (EMC) – Part 4-6: Testing and measurement techniques – Immunity to conducted disturbances, induced by radio-frequency fields*

IEC 61000-4-11:2004, *Electromagnetic compatibility (EMC) – Part 4-11: Testing and measurement techniques – Voltage dips, short interruptions and voltage variations immunity tests*
IEC 61000-4-11:2004/AMD1:2017

IEC 61000-4-34:2005, *Electromagnetic compatibility (EMC) – Part 4-34: Testing and measurement techniques – Voltage dips, short interruptions and voltage variations immunity tests for equipment with input current more than 16 A per phase*
IEC 61000-4-34:2005/AMD1:2009

IEC 61000-6-1:2016, *Electromagnetic compatibility (EMC) – Part 6-1: Generic standards – Immunity standard for residential, commercial and light-industrial environments*

IEC 61000-6-2:2016, *Electromagnetic compatibility (EMC) – Part 6-2: Generic standards – Immunity standard for industrial environments*

IEC 61000-6-3:2006, *Electromagnetic compatibility (EMC) – Part 6-3: Generic standards – Emission standard for residential, commercial and light-industrial environments*

IEC 61000-6-3:2006/AMD1:2010

IEC 61000-6-4:2018, *Electromagnetic compatibility (EMC) – Part 6-4: Generic standards – Emission standard for industrial environments*

IEC 62135-1:2015, *Resistance welding equipment – Part 1: Safety requirements for design, manufacture and installation*

ISO 669:2016, *Resistance welding – Resistance welding equipment – Mechanical and electrical requirements*

CISPR 11:2009/2015, *Industrial, scientific and medical equipment – Radio-frequency disturbance characteristics – Limits and methods of measurement*

~~CISPR 11:2009/AMD 1:2010~~

CISPR 11:2015/AMD1:2016

CISPR 11:2015/AMD2:2019

CISPR 16-1-1:2019, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-1: Radio disturbance and immunity measuring apparatus – Measuring apparatus*

CISPR 16-1-2:2014, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-2: Radio disturbance and immunity measuring apparatus – Coupling devices for conducted disturbance measurements*

CISPR 16-1-2:2014/AMD1:2017

CISPR 16-1-4:2019, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-4: Radio disturbance and immunity measuring apparatus – Antennas and test sites for radiated disturbance measurements*

~~ISO 669, Resistance welding – Resistance welding equipment – Mechanical and electrical requirements~~

3 Terms and definitions

~~For the purposes of this document, the terms and definitions given in IEC 60050-161 concerning EMC and the relevant phenomena, given IEC 60050-851, IEC 62135-1 and ISO 669 on resistance welding equipment, as well as the following, apply.~~

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 cable port

point at which a conductor or a cable is connected to the apparatus

Note 1 to entry: Examples are signal, control and power ports.

Note 2 to entry: The welding circuit of resistance welding equipment is not a cable port but is part of the enclosure port.

~~3.2 conventional load~~

~~load condition with the electrodes short-circuiting as defined in ISO 669~~

~~3.3 conventional value~~

~~standardized value that is used as a measure of a parameter for the purposes of comparison, calibration, testing, etc.~~

~~Note 1 to entry: Conventional values do not necessarily apply during the actual welding process.~~

3.2 click

disturbance which exceeds the limit of continuous disturbance no longer than 200 ms and which is separated from a subsequent disturbance by at least 200 ms

Note 1 to entry: Both intervals are related to the level of the limit of continuous disturbance.

Note 2 to entry: A click may contain a number of impulses, in which case the relevant time is that from the beginning of the first to the end of the last impulse.

[SOURCE: IEC 60050-851:2008, 851-15-13]

3.3 enclosure port

physical boundary of the apparatus through which electromagnetic fields may radiate or impinge

3.4 FAR fully-anechoic chamber

shielded enclosure, the internal surfaces of which are lined with radio-frequency-energy absorbing material (i.e. RF absorber) that absorbs electromagnetic energy in the frequency range of interest

[SOURCE: CISPR 11:2015/AMD1:2016, 3.20]

3.5 EUT equipment under test

3.5 idle state

operating ~~mode~~ state in which the power is switched on, ~~but~~ and the welding circuit is not energized

Note 1 to entry: For some types of equipment there is no idle state.

Note 2 to entry: For a power source in a mechanized system, the configuration to achieve idle state is defined by the manufacturer.

Note 3 to entry: An idle state can include a low energy state in which a welding process cannot be started without automatic or manual reactivation.

**3.6
OATS**

open-area test site

facility used for measurements of electromagnetic fields the intention for which is to simulate a semi-free-space environment over a specified frequency range that is used for radiated emission testing of products

Note 1 to entry: An OATS typically is located outdoors in an open area, and has an electrically-conducting ground plane.

[SOURCE: CISPR 11:2015/AMD1:2016, 3.21]

**3.7
port**

~~particular interface of the specified apparatus with the external electro-magnetic environment~~

particular interface of an equipment which couples this equipment with the external electromagnetic environment (IEC 60050-161:2018, 161-01-01) and through which the equipment is influenced by this environment

EXAMPLE Examples of ports of interest are shown in Figure 1. The enclosure port is the physical boundary of the apparatus (e.g. enclosure). The enclosure port provides for radiated and electrostatic discharge (IEC 60050-161:2018, 161-01-22) energy transfer, whereas the other ports provide for conducted energy transfer.

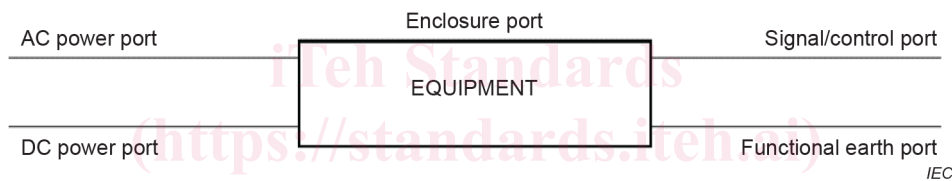


Figure 1 – Examples of ports

Note 1 to entry: Ports in the subject area of electromagnetic compatibility are specific cases of the port defined in IEC 60050-131:2002, 131-12-60.

<https://standards.iteh.ai/catalog/standards/iec/02211ab3-ae87-4ef6-91d5-e3f4af90df45/iec-62135-2-2020>

[SOURCE: IEC Guide 107:2009, 3.1.12, modified – The presentation of the term and the wording of the definition have been revised for compatibility with IEC 60050 (all parts).]

**3.8
SAC**

semi-anechoic chamber

shielded enclosure, in which five of the six internal surfaces are lined with radio-frequency energy absorbing material (i.e. RF absorber) that absorbs electromagnetic energy in the frequency range of interest, and the bottom horizontal surface is a conducting ground plane for use with OATS test set-ups

[SOURCE: CISPR 11:2015/AMD1:2016, 3.22]

**3.9
small equipment**

equipment, either positioned on a table top or standing on the floor which, including its cables fits in an imaginary cylindrical test volume of 1,2 m in diameter and 1,5 m ~~above the~~ height (to ground plane)

[SOURCE: CISPR 11:2009/AMD1:2010, 3.10]

[SOURCE: CISPR 11:2015, 3.17, modified – Replacement of the term "small size equipment" by "small equipment".]

3.10 wired network port

port for the connection of voice, data and signalling transfers intended to interconnect widely-dispersed systems by direct connection to a single-user or multi-user communication network

Note 1 to entry: Examples of these include CATV, PSTN, ISDN, xDSL, LAN and similar networks.

Note 2 to entry: These ports may support screened or unshielded cables and may also carry AC or DC power where this is an integral part of the telecommunication specification.

[SOURCE: CISPR 32:2015, 3.1.32]

4 General test requirements

4.1 Test conditions

Tests shall be carried out on completely assembled equipment representative of the series production. Tests shall be performed within the specified operating conditions for the apparatus at its rated supply voltage and frequency as given in IEC 62135-1:2015. Results obtained for RF emission and immunity at 50 Hz are valid for the same model operating at 60 Hz and vice versa.

4.2 Measuring instruments

The measuring equipment shall comply with the requirements of CISPR 16-1-1:2019 and the standards referred to in Table 8, Table 9 and Table 10 as applicable.

4.3 Artificial mains network

Measurement of the mains terminal disturbance voltage shall be made using an artificial mains network, if commercially available, consisting of $50 \Omega/50 \mu\text{H}$ or a $50 \Omega/50 \mu\text{H} + 5 \Omega$ V-network as specified in CISPR 16-1-2:2014 and CISPR 16-1-2:2014/AMD1:2017.

The artificial network is required to provide a defined impedance at RF across the mains supply at the point of measurement and also to provide for isolation of the equipment under test from ambient noise on the power lines.

4.4 Voltage probe

A voltage probe as specified in CISPR 16-1-2:2014 and CISPR 16-1-2:2014/AMD1:2017 shall be used when the artificial mains network cannot be used. The probe is connected sequentially between each line and the reference earth. The probe shall consist of a blocking capacitor and a resistor such that the total resistance between the line and earth is at least $1\,500 \Omega$. The effect on the accuracy of measurement of the capacitor or any other device which may be used to protect the measuring receiver against dangerous currents shall be either less than 1 dB or allowed for in calibration.

4.5 Antennas

In the frequency range below 30 MHz the antenna shall be a loop as specified in CISPR 16-1-4:2019.

In the frequency range from 30 MHz to 1 GHz the antenna(s) used shall be as specified in CISPR 16-1-4:2019. Measurements shall be made for both horizontal and vertical polarization. The nearest point of the antenna(s) to the ground shall be not less than 0,2 m.

5 Test set-up for emission and immunity

5.1 General requirements

Emission and immunity testing shall be carried out on a representative resistance welding installation as described below. Resistance welding equipment tested in such an installation shall be considered to have met the necessary requirements of this document.

~~In any situation where it is necessary to re-test the equipment to show compliance with this standard the test setup originally chosen shall be used in order to guarantee consistency of the results, unless it is agreed by the manufacturer to do otherwise.~~

If the resistance welding equipment is part of an installation, or can be connected to auxiliary equipment, then the resistance welding equipment shall be tested whilst connected to the minimum configuration of auxiliary equipment necessary to exercise the ports. If the resistance welding equipment has a large number of similar ports or ports with many similar connections, then a sufficient number shall be selected to simulate actual operating conditions and to ensure that all the different types of termination are covered.

Measurements to determine compliance with the low-frequency emission limits shall be made in accordance with the test procedures of relevant basic and referenced standards.

For electromagnetic radiation disturbance tests the separation between the antenna and the equipment under test shall be as specified in Clause 6 of CISPR 11:2009/2015, CISPR 11:2015/AMD1:2016 and CISPR 11:2015/AMD2:2019.

For radiated emission test in the frequency range between 150 kHz and 1 MHz, the antenna shall be positioned on the axis z , as given in Figure 2, perpendicular to the plane x, y of the welding circuit.

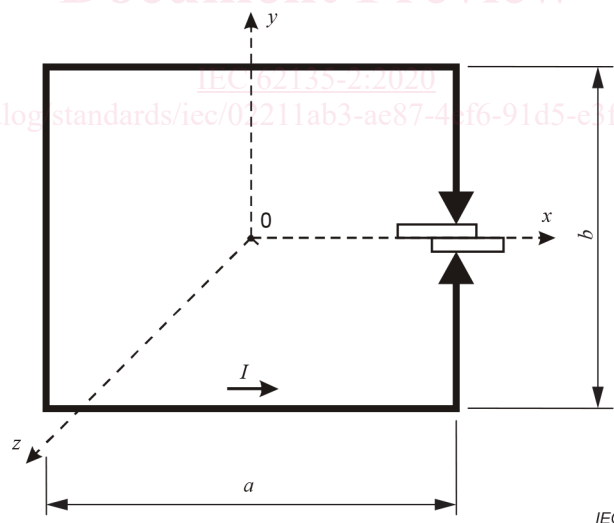


Figure 2 – Test position for H field measurement

Specific test set-up geometries for immunity tests are found in the basic standards referred to in Table 8, Table 9 and Table 10.

Class A resistance welding equipment may be measured either on a test site or *in situ* as preferred by the manufacturer.

NOTE 1 Due to size, complexity or operating conditions, some resistance welding equipment are sometimes measured *in situ* in order to show compliance with the radiation disturbance limits specified herein.

NOTE 2 By their nature, *in situ* tests are not adequate for type testing purposes.