

## IEC TS 61496-4-3

Edition 2.0 2022-09 REDLINE VERSION

# TECHNICAL SPECIFICATION



Safety of machinery – Electro-sensitive protective equipment – Part 4-3: Particular requirements for equipment using vision based protective devices (VBPD) – Additional requirements when using stereo vision techniques (VBPDST)

IEC TS 61496-4-3:2022





## THIS PUBLICATION IS COPYRIGHT PROTECTED Copyright © 2022 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

**IEC Secretariat** 3, rue de Varembé CH-1211 Geneva 20 Switzerland

Tel.: +41 22 919 02 11 info@iec.ch

www.iec.ch

#### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

#### IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

**IEC Just Published - webstore.iec.ch/justpublished**Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

#### IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

#### IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

#### Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.



## IEC TS 61496-4-3

Edition 2.0 2022-09 REDLINE VERSION

# TECHNICAL SPECIFICATION



Safety of machinery – Electro-sensitive protective equipment – Part 4-3: Particular requirements for equipment using vision based protective devices (VBPD) – Additional requirements when using stereo vision techniques (VBPDST)

FC TS 61496-4-3:2023

https://standards.iteh.ai/catalog/standards/iec/9d8f12e2-a236-4409-8b45-f867e770d256/iec-ts-61496-4-3-2022

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ICS 13.110; 29.260.99 ISBN 978-2-8322-5815-6

Warning! Make sure that you obtained this publication from an authorized distributor.

## CONTENTS

FOREWORD	4
INTRODUCTION	2
1 Scope	8
2 Normative references	9
3 Terms and definitions	9
4 Functional, design and environmental requirements	13
5 Testing	23
6 Marking for identification and for safe use	39
7 Accompanying documents	39
Annex A (normative) Optional functions of the ESPE	41
Annex B (normative) Catalogue of single faults affecting the electrical equipment of the ESPE, to be applied as specified in 5.3	43
Annex AA (informative) The positioning of VBPDST employing a volume as a detection zone in respect of parts of the human body	44
Annex BB (informative) Relationship between position accuracy and tolerance zones for VBPDST	53
Annex CC (informative) Basic principles of physics for contrast of convex homogeneous bodies	50
Bibliography	
(IIttps://stanuarus.iten.ar)	
Figure 1 – Image planes in imaging device of a VBPDST	10
Figure 2 – 3D view of a vision based protective device using stereo vision techniques (VBPDST)	
Figure 3 – 2D view of a vision based protective device using stereo vision techniques (VBPDST)	1496-4-3-2
Figure 4 – Examples for periodic surface structures on the background	28
Figure 5 – Test setup for indirect light interference on the background	35
Figure 6 – Test setup for VBPDST of identical design with PAPT	36
Figure 7 – Test setup for direct light interference on the sensing device	37
Figure AA.1 – Minimum distance S – Example 1	47
Figure AA.2 – Overall minimum distance $S_0$ without tolerance zone – Example 1	47
Figure AA.3 – Overall minimum distance $S_{\rm O}$ including tolerance zone – Example 1	48
Figure AA.4 – Minimum distance S – Example 2	49
Figure AA.5 – Overall minimum distance $S_0$ without tolerance zone – Example 2	50
Figure AA.6 – Overall minimum distance $S_0$ including tolerance zone – Example 2	
Figure AA.7 – Application example for body detection of a VBPDST employing a volume as a detection zone	
Figure BB.1 – Relationship between test piece position and the probability of detection	
Figure BB.2 – Example for measurement of the probability of detection	
Figure BB.3 – Relationship between detection zone and tolerance zone	
Figure BB.4 – Overall minimum distance $S_0$ including tolerance zone	
Figure CC.1 – Illumination model – Sphere illuminated by a point source	

Figure CC.2 – Illumination model – Sphere illuminated by a half-Ulbricht sphere	60
Figure CC.3 – Brightness of a surface element of a sphere in spherical coordinates	61
Figure CC.4 – Brightness distribution in an image of a sphere	61
Figure CC.5 – Grey value profile over a sphere with low contrast for a typical imaging contrast (Modulation Transfer Function)	62
Figure CC.6 – Grey value profile over a sphere with the same colour as the background	62
Figure CC.7 – Grey value profile over a sphere in front of a background that is half as bright	63
Figure CC.8 – Grey value profile over a sphere in front of a background that is twice as bright	63
Figure CC.9 – Grey value profile over a sphere by low contrast	64
Figure CC.10 – Grey value profile over the sphere from Figure CC.9 but with the direction to the imaging device changed by 10°	64
Figure CC.11 – Grey value profile over a small sphere that results in an image that is 5 pixels in diameter	65
Table 431 – Verification of detection capability requirements (see also 4.2.12)	26
Table 2 432 – Overview of light interference tests	31

# iTeh Standards (https://standards.iteh.ai) Document Preview

IEC TS 61496-4-3:2022

#### INTERNATIONAL ELECTROTECHNICAL COMMISSION

# SAFETY OF MACHINERY – ELECTRO-SENSITIVE PROTECTIVE EQUIPMENT –

Part 4-3: Particular requirements for equipment using vision based protective devices (VBPD) – Additional requirements when using stereo vision techniques (VBPDST)

### **FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition IEC TS 61496-4-3:2015. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

This second edition cancels and replaces the first edition published in 2015-05. This edition constitutes a technical revision.

This edition includes the following technical changes with respect to the previous edition:

a) Some requirement clauses and test procedures have been adapted or removed because they have been consolidated in IEC 61496-1:2020 (e.g. 5.4.6.2 Light sources or Clause A.9).

The text of this document is based on the following documents:

Draft	Report on voting
44/934/DTS	44/957A/RVDTS

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this document is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at <a href="https://www.iec.ch/members\_experts/refdocs">www.iec.ch/members\_experts/refdocs</a>. The main document types developed by IEC are described in greater detail at <a href="https://www.iec.ch/publications">https://www.iec.ch/publications</a>.

This document is to be used in conjunction with IEC 61496-1:2020.

This document supplements or modifies the corresponding clauses in IEC 61496-1:2020 to specify particular requirements for the design, construction and testing of electro-sensitive protective equipment (ESPE) for the safeguarding of machinery, employing vision based protective devices (VBPD) using stereo vision techniques (VBPDST) for the sensing function.

Where a particular clause or subclause of IEC 61496-1:2020 is not mentioned in this document, that clause or subclause applies as far as is reasonable. Where this document states "addition", "modification" or "replacement", the relevant text of IEC 61496-1:2020 is adapted accordingly.

Clauses and subclauses which are additional to those of IEC 61496-1:2020 are numbered sequentially, following on the last available number in IEC 61496-1:2020. Terminological entries (in Clause 3) which are additional to those in IEC 61496-1:2020 are numbered starting from 3.4301. Additional annexes are lettered from AA onwards and additional tables are numbered with prefix 43.

A list of all parts in the IEC 61496 series, published under the general title *Safety of machinery* – *Electro-sensitive protective equipment*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- · reconfirmed,
- withdrawn,
- · replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

# iTeh Standards (https://standards.iteh.ai) Document Preview

IEC TS 61496-4-3:2022

#### INTRODUCTION

An electro-sensitive protective equipment (ESPE) is applied to machinery presenting a risk of personal injury. It provides protection by causing the machine to revert to a safe condition before a person can be placed in a hazardous situation.

The working group responsible for drafting this document was concerned that, due to the complexity of the technology, there are many issues that are highly dependent on analysis and expertise in specific test and measurement techniques. In order to provide a high level of confidence, independent review by relevant expertise is required recommended. They considered that if this high level of confidence could not be established these devices would not be suitable for use in safety related applications.

# iTeh Standards (https://standards.iteh.ai) Document Preview

IEC TS 61496-4-3:2022

## SAFETY OF MACHINERY – ELECTRO-SENSITIVE PROTECTIVE EQUIPMENT –

Part 4-3: Particular requirements for equipment using vision based protective devices (VBPD) – Additional requirements when using stereo vision techniques (VBPDST)

#### 1 Scope

#### Replacement:

This document specifies requirements for the design, construction and testing of non-contact electro-sensitive protective equipment (ESPE) designed specifically to detect persons or parts of persons as part of a safety-related system, employing vision-based protective devices (VBPDs) using stereo vision techniques (VBPDST) for the sensing function. Special attention is directed to features which ensure that an appropriate safety-related performance is achieved. An ESPE—may can include optional safety-related functions, the requirements for which are given in Annex A of IEC 61496-1:20122020 and this document.

NOTE "Non-contact" means that physical contact is not required for sensing.

Where this document does not contain all necessary provisions, IEC TS 62998-1 applies.

It is also possible, for those aspects not considered in this document, to use provisions from IEC TS 62998-1 additionally.

This document does not specify the dimensions or configurations of the detection zone and its disposition in relation to hazardous parts for any particular application, nor what constitutes a hazardous state of any machine. It is restricted to the functioning of the ESPE and how it interfaces with the machine.

The detection principle is based on the evaluation of images from different viewing points (stereoscopic view) for the determination of distance information. This distance information is used to determine the location position of an object(s).

- This document is limited to vision based ESPEs with fixed distances (stereo base) and fixed directions between the different imaging devices fixed during manufacture of the optical axes using a fixed focal length.
- It is limited to vision based ESPEs, with a minimum distance from the sensing device to the detection zone of 4 times of the stereo base.
- It is limited to vision based ESPEs that can detect objects with at least 5 pixel diameter in the image plane.
- It is limited to vision based ESPEs that do not require human intervention for detection.
- It is limited to vision based ESPEs that detect objects entering into or being present in a detection zone(s).
- It is limited to VBPDSTs employing radiation at wavelengths within the range 400 nm to 1 500 nm.
- This document does not address those aspects required for complex classification or differentiation of the object detected.
- This document does not consider the aspects of a moving ESPE installation.

Additional requirements and tests can apply in the following cases:

- Use of multi-spectral (colour) techniques;
- Setups other than as shown in Figure 2 and Figure 3 (e.g. changing backgrounds, horizontal orientation of the optical axis with respect to the floor);
- Intended for outdoor applications.

This document is relevant for VBPDSTs having a stated detection capability up to 200 mm.

This document—may can be relevant to applications other than those for the protection of persons or parts of persons like arm or fingers (in the range 14 mm to 200 mm), for example the protection of machinery or products from mechanical damage. In those applications, additional requirements can be necessary, for example when the materials that are to be recognized by the sensing function have different properties from those of persons.

This document does not deal with EMC emission requirements.

#### 2 Normative references

Addition:

IEC 60825-1:2014, Safety of laser products – Part 1: Equipment classification and requirements

IEC 61496-1:<del>2012</del>2020, Safety of machinery – Electro-sensitive protective equipment – Part 1: General requirements and tests

IEC 62471:2006, Photobiological safety of lamps and lamp systems

ISO 13855:2010, Safety of machinery – Positioning of safeguards with respect to the approach speeds of parts of the human body IEC  $\pm 8.61496-4-3:2022$ 

ISO 20471:2013, High visibility clothing – Test methods and requirements

#### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

This clause of IEC 61496-1:2020 is applicable except as follows:

#### Replacement:

#### 3.3

#### detection capability

ability to detect the specified test pieces (see 4.2.13) in the specified detection zone

Note 1 to entry: Detection capability is measured by the size of an object that can be detected. An increase in detection capability means that a smaller object can be detected.

[SOURCE: IEC 61496-1:<del>2012</del>2020, 3.3, modified – The text has been changed to make it more relevant to vision based sensors and Note 1 has been added.]

#### 3.4

## detection zone, <of a VBPDST>

three-dimensional volume (for example, in the shape of a pyramid or cone) within which a specified test piece will be detected by the VBPDST

Note 1 to entry: Example for three-dimensional volume are a pyramid or a cone

#### 3.5

## electro-sensitive protective equipment ESPE

Addition:

Note 3 to entry: Illumination unit(s), if applicable, is/are part(s) of the sensing device.

Addition:

#### 3.4301

#### minimum detection zone

lowest dimension of the detection zone for a test piece moving with maximum speed

Note 1 to entry: This is the lowest dimension that ensures the integrity of the detection capability.

#### 3.4302

### evaluation images, pl

set of images which are used by the detection algorithms

SEE: Figure 1.

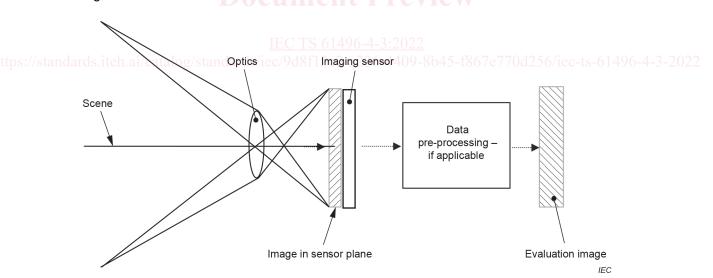


Figure 1 - Image planes in imaging device of a VBPDST

#### 3.4303 Image

<of a VBPDST>

snapshot representation of the scene in different planes of the VBPDST in form of a two dimensional pixel matrix

#### 3.4304

### vision-based protective device

**VBPD** 

ESPE using an imaging sensor, operating in the visible and near infrared light spectrum to detect an object in a defined field of view

Note 1 to entry: This note applies to the French language only.

#### 3.4305

#### vision based protective device using stereo vision techniques **VBPDST**

VBPD with two or more imaging devices using stereo vision techniques and with or without active illumination

#### 3.4306

#### imaging sensor

opto-electronic device which produces electrical signals representing the characteristics of an image

SEE: Figure 1.

#### 3.4307

#### imaging device

combination of an imaging sensor, optics and the processing unit (if applicable)

SEE: Figure 1.

Note 1 to entry: The imaging devices are part of the sensing device.

#### 3.4308

#### operating distance

distance measured along the z-axis of the sensing device coordinate system

#### 3.4309

Pixel ds.iteh.ai/catalog/standards/iec/9d8f12e2-a236-4409-8b45-f867e770d256/iec-ts-61496-4-3-2022

<of a sensor>

smallest light sensitive element of an imaging sensor

#### 3.4310

#### Pixel

<of an image>

area of the smallest element that can be distinguished from its neighbouring elements

#### 3.4311

#### ambient illumination technique

technique that relies on scene lighting for illumination and contrast to obtain range measurements

#### 3.4312

#### pattern projection technique

technique that uses a special projection to enhance the contrast of a scene

#### 3.4313

## sensing device coordinate system

coordinate system oriented to the sensing device

Note 1 to entry: Typically, the z-axis is parallel to the optical axis of one imaging device.

#### 3.4314

#### tolerance zone

zone outside of and adjacent to the detection zone within which the specified test piece is detected with a probability of detection lower than the required probability within the detection zone

Note 1 to entry: The tolerance zone is necessary to achieve the required probability of detection of the specified test piece within the detection zone. For explanation of the concept of probability of detection and the tolerance zone, see Annex BB.

#### 3.4315

#### user coordinate system

coordinate system that may be configured by the user

#### 3.4316

### zone with limited detection capability

volume between the detection zone and the front of the sensing device in which the stated detection capability is not achieved

#### 3.4317

#### stereo base

distance between the centres of the entrance pupils of two imaging devices

Note 1 to entry: The expression baseline is often used as synonym for stereo base.

#### 3.4318

#### position accuracy

accuracy in three dimensions of the position of an object as measured by VBPDST

#### Addition:

#### Abbreviated terms

AIT	A I IEC/TSI/61406 / 2,2022	
AIT	Ambient illumination technique	

https://st.BTP ds.itch.ai/ca/Black test piece

GB Grey background
GTP Grey test piece

lx Lux

LC Low contrast

**OD** Operating distance

P1 Position 1 of the light source
P2 Position 2 of the light source
PAPT Pattern projection techniques

PTZ Tolerance zone related to probability

**RRTP** Retro-reflective test piece

**STZ** Tolerance zone related to systematic influences

TTC Typical test condition (test condition for normal operation tests)

TI Typical illumination (illumination used for normal operation tests)

VBPDST Vision based protective devices using stereo vision techniques

WTP White test piece