



Designation: **C1346 – 08 (Reapproved 2014) C1346 – 19**

Standard Practice for Dissolution of UF₆ from P-10 Tubes^{1,2}

This standard is issued under the fixed designation C1346; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ε) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This practice covers the dissolution of UF₆ from a P-10 tube to provide solutions for analysis.

1.2 The values stated in SI units are to be regarded as standard. No other units of measurement are included in this standard.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.* For specific safeguard and safety precaution statements, see Section 89.

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards:*³

[C761 Test Methods for Chemical, Mass Spectrometric, Spectrochemical, Nuclear, and Radiochemical Analysis of Uranium Hexafluoride](#)

[C787 Specification for Uranium Hexafluoride for Enrichment](#)

[C859 Terminology Relating to Nuclear Materials](#)

[C996 Specification for Uranium Hexafluoride Enriched to Less Than 5 % ²³⁵U](#)

[D1193 Specification for Reagent Water](#)

3. Terminology

3.1 *Definitions:*

3.1.1 For definitions of terms relating to the nuclear fuel cycle, refer to Terminology [C859](#).

4. Summary of Practice

4.1 UF₆ samples intended for analysis are packaged in P-10 tubes to prevent sublimation and reaction with moisture in the air. The P-10 tube assembly ([Fig. 1](#)) consists of a Polychlorotrifluoroethylene (PCTFE) tube containing the UF₆, a PCTFE gasket to cover the tube's opening, and a nut and plug (Monel or SS) to seal the gasket to the tube.

4.2 The UF₆ tube is weighed, cooled in liquid nitrogen, and quickly opened and immersed in water for dissolution. The pieces of the tube's assembly are removed from the resulting solution, rinsed, dried, reassembled, and weighed. The solution is dried for gravimetric conversion to U₃O₈, or diluted to an appropriate concentration for dispensing into aliquots for subsequent analysis.

5. Significance and Use

5.1 Uranium hexafluoride is a basic material used to prepare nuclear reactor fuel. To be suitable for this purpose the material must meet criteria for uranium content, isotopic composition and metallic impurities in Specification [C787](#) and [C996](#). This practice results in the complete dissolution of the sample for uranium and impurities analysis, and determination of isotopic distribution by mass spectrometry as described in, for example, Test Methods [C761](#).

¹ This practice is under the jurisdiction of ASTM Committee [C26](#) on Nuclear Fuel Cycle and is the direct responsibility of Subcommittee [C26.05](#) on Methods of Test. Current edition approved Jan. 1, 2014/Jan. 1, 2019. Published February 2014/February 2019. Originally approved in 1996. Last previous edition approved in 2008/2014 as [C1346 – 08](#)/[C1346 – 08](#) (2014). DOI: [10.1520/C1346-08R14](#)/[10.1520/C1346-19](#).

² Polychlorotrifluoroethylene P-10 tubes are widely accepted by the industry for subsample collection and subsequent UF₆ quality analyses or dispatch to the customer. The procedure for subsample collection and dissolution can also be used for other types of subsample tubes, for example, P-20, P-80 or ~~P-100~~, P-100, in that case the amount of water has to be adjusted to ensure complete hydrolysis of UF₆ and avoid excessive heat evolution.

³ For referenced ASTM standards, visit the ASTM website, [www.astm.org](#), or contact ASTM Customer Service at [service@astm.org](#). For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

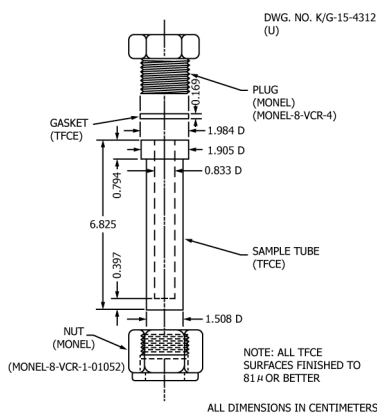


FIG. 1 Example of a P-10 Sample Tube

6. Apparatus

- 6.1 *Steam bath*, in a hood, if optional step [9-2-1310.2.13](#) is used.
 - 6.2 *Vacuum oven*, if option 2 of [9-2-1410.2.14](#) is used. The oven should be adjustable to 80°C at an absolute pressure of 3×10^3 Pa.
 - 6.3 *Dewar flask*, wide-mouth.
 - 6.4 *Vise*, small lab-bench model or similar type of holder.
 - 6.5 *Wrench*, $1\frac{5}{16}$ in.
 - 6.6 *Plastic clamping forceps*, 12 to 13 cm long, with a claw-like bent tip, to securely hold the cylindrical PCTFE tube.
- NOTE 1—These forceps are not commercially available. Bend the ends of a straight-tip forceps by heating over a moderate flame, shaping, and maintaining the shape until cool.
- 6.7 *TFE-fluorocarbon-coated spatula*, 0.5- to 1-cm wide at its flat end, optional.
 - 6.8 *Platinum or PCTFE rod*, optional.
 - 6.9 *Platinum dishes or plastic beakers with compatible HF resistance (typically PolyEthylene; PE)*, large enough to contain a completely submerged P-10 tube.
 - 6.10 *Copper wires*, optional. The wires should be flexible and looped at one end to loosely fit around the PCTFE tube without allowing the flare nut to pass through.
 - 6.11 *Desiccator*, optional.
 - 6.12 *Balance*, ≥ 100 -g capacity, readable to at least 0.1 mg, preferably 0.01 mg.

NOTE 2—Use of a balance with lower sensitivity will negatively impact on sampling error.

7. Interferences

- 7.1 The weight of the PCTFE tube is affected by atmospheric humidity. Keep the P-10 tube assembly in a desiccator between weighings until constant weight is attained.
- 7.2 The capacity of the UF_6 tube (a maximum of approximately 13.0 g UF_6) limits the number and size of the aliquots that can be obtained from each tube. See analytical procedures for their requirements.

8. Reagents

- 8.1 *Purity of Reagents*—Reagent grade chemicals shall be used in all tests. Unless otherwise indicated, it is intended that all reagents conform to the specifications of the Committee on Analytical Reagents of the American Chemical Society where such specifications are available.⁴ Other grades of reagents may be used, provided it is first ascertained that the reagent is of sufficiently high purity to permit its use without lessening the accuracy of the determination.
- 8.2 Liquid nitrogen.
- 8.3 Deionized distilled water in accordance with Specification [D1193](#), approximately ~~50–100~~ 50 to 100 cm³ per sample.

⁴ *Reagent Chemicals, American Chemical Society Specifications*, American Chemical Society, Washington, DC. For suggestions on the testing of reagents not listed by the American Chemical Society, see *Analar Standards for Laboratory Chemicals*, BDH Ltd., Poole, Dorset, U.K., and the *United States Pharmacopeia and National Formulary*, U.S. Pharmacopeial Convention, Inc. (USPC), Rockville, MD.