

TECHNICAL REPORT



INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE

**Television broadcast receivers and associated equipment – Immunity
characteristics – Methods of objective picture assessment**

(<https://standards.iteh.ai>)
Document Preview

CISPR TR 29:2020

<https://standards.iteh.ai/catalog/standards/iec/40263783-af38-43e4-bc65-2680c5a65b94/cispr-tr-29-2020>





THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2020 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

[CISPR TR 29:2020](https://standards.iteh.ai/catalog/standards/iec/40263783-af38-43e4-bc65-2680c5a65b94/cispr-tr-29-2020)

<https://standards.iteh.ai/catalog/standards/iec/40263783-af38-43e4-bc65-2680c5a65b94/cispr-tr-29-2020>

TECHNICAL REPORT



INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE

**Television broadcast receivers and associated equipment – Immunity
characteristics – Methods of objective picture assessment**

Document Preview

CISPR TR 29:2020

<https://standards.iteh.ai/catalog/standards/iec/40263783-af38-43e4-bc65-2680c5a65b94/cispr-tr-29-2020>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.100.20

ISBN 978-2-8322-8345-5

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Abbreviated terms	5
4 Test method for objective picture assessment	5
5 Methodology for detection of analogue picture degradations.....	6
5.1 General.....	6
5.2 Algorithm for superimposed patterns, moiré patterns	6
5.3 Algorithm for loss of luminance and contrast.....	7
5.4 Algorithm for loss of colour	7
5.5 Algorithm for loss of synchronisation.....	7
6 Methodology for detection of digital picture degradations.....	8
6.1 General.....	8
6.2 Algorithm for blocking	8
6.3 Algorithm for frozen patterns, stop of moving element.....	8
6.4 Algorithm for total loss of picture, irrecoverable data stream error.....	8
7 Alternative methodology for detection of digital picture degradations	9
7.1 Test pattern	9
7.2 Analysis.....	9
7.2.1 General	9
7.2.2 Automatic spatial synchronisation.....	10
7.2.3 Spatial activity parameter	10
7.2.4 Temporal activity parameter	10
7.2.5 Blocking effect parameter	10
7.3 Comparison	10
Bibliography.....	12
Figure 1 – Colour bar pattern with test elements for detection of analog picture degradation	7
Figure 2 – Colour bar pattern with moving element for detection of digital picture degradation	8
Figure 3 – Alternative colour bar pattern with moving element for detection of digital picture degradation	9

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**TELEVISION BROADCAST RECEIVERS AND ASSOCIATED EQUIPMENT –
IMMUNITY CHARACTERISTICS –
METHODS OF OBJECTIVE PICTURE ASSESSMENT**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a Technical Report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

CISPR 29, which is a technical report, has been prepared by CISPR subcommittee I: Electromagnetic compatibility of information technology equipment, multimedia equipment and receivers.

This second edition cancels and replaces the first edition published in 2004. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) update of the references, and
- b) editorial improvements.

The text of this Technical Report is based on the following documents:

Draft TR	Report on voting
CIS/II/634/DTR	CIS/II/638/RVDTR

Full information on the voting for the approval of this Technical Report can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

TELEVISION BROADCAST RECEIVERS AND ASSOCIATED EQUIPMENT – IMMUNITY CHARACTERISTICS – METHODS OF OBJECTIVE PICTURE ASSESSMENT

1 Scope

This document describes the algorithms used for objective picture assessment in immunity tests of analogue and digital TV broadcast receivers and associated equipment.

The algorithms used were developed on the basis of the specifications originally included in Annex K of CISPR 20:2002/AMD2:2004, the later edition of which has been replaced by CISPR 35:2016. The method of objective picture assessment described in that annex employs the same interference mechanism and is based on the same wanted signal definition as specified in ~~CISPR 20~~ CISPR 35 for subjective picture assessment. Objective picture assessment, therefore, constitutes an alternative to the subjective method and offers the advantage of direct correlation to the subjective method.

2 Normative references

~~The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.~~

~~CISPR 20:2002, Sound and television broadcast receivers and associated equipment – Immunity characteristics – Limits and methods of measurement Amendment 1 (2002)~~

~~ITU-R BT.500-10, Methodology for the subjective assessment of the quality of television pictures~~

~~ITU-R BT.801-1, Test signals for digitally encoded colour television signals conforming with Recommendations ITU-R BT.601 (Part A) and ITU-R BT.656~~

There are no normative references in this document.

3 Abbreviated terms

For the purposes of this document, the following abbreviated terms apply.

~~CCVS composite colour video signal (chrominance, video, blanking and sync signal)~~

DCT discrete cosine transform

EUT equipment under test

HSL hue, saturation, luminance (colour space model)

~~SSCQE (single stimulus continuous quality evaluation)~~

4 Test method for objective picture assessment

Objective picture assessment is based on comparison of the picture displayed on an EUT with a reference picture or a reduced reference picture.

Both the reference picture and the test picture can be recorded from the EUT monitor by means of a video camera or at the EUT's video output ~~(CCVS) direct~~ if it has one.

The recorded test picture is digitised, and deviations from a stored reference picture are determined by means of the picture assessment algorithms described below. An alternative methodology computes the deviation from specific features determined on both the reference picture and the picture to assess.

5 Methodology for detection of analogue picture degradations

5.1 General

Analogue picture degradations are defined as:

- superimposed patterns, moiré patterns;
- loss of luminance and contrast;
- loss of colour;
- loss of synchronization.

5.2 Algorithm for superimposed patterns, moiré patterns

To assess picture degradation showing as a set of lines, an average signal value is formed for a defined area in the simplest case. The deviation of the average signal value of this area from a reference value determined from an undisturbed picture serves as a criterion of whether or not picture degradation is present.

For picture assessment according to this method, the colour bar pattern ~~according to ITU-R BT.801-4~~ used for the test is first converted to a suitable colour space, preferably grey. From each colour bar, a rectangular section is taken into which a rectangular test window is positioned. The test window is divided into column segments (see Figure 1).

To reliably detect picture degradation, the test window is rotated by a constant angular increment of 2° until 180° is attained. For picture degradation in the form of lines, the test window segments will, in the case of one of the angles measured, be aligned approximately parallel to the interference lines, thus producing a significant deviation from average signal values.

As already mentioned, an average value or column sum is determined for each segment, and the deviation from a reference value is calculated. In addition, a regression line over all column sums is formed, and the square offset of each column sum from the regression line is calculated. If the sum of the square offsets of the column sums exceeds the corresponding value determined for a reference picture, a superimposed pattern or moiré pattern is detected.

The position and size of the test window, or the test window diagonal, should be selected such that, for any angular position of the test window, all pixels of the test window are located within the same colour bar of the test pattern, i.e. within the homogeneous area of the colour bar. This excludes impairment of results by influences from the cross-colour region.

After a 180° rotation, the test window is shifted vertically, i.e. parallel to the borders of the colour bar section, by a length increment of half the test window height. In its new position, the test window is again rotated by 180°, and a measurement is performed for each angular increment. By repeatedly shifting the test window within the colour bar section, virtually the complete colour bar is covered.

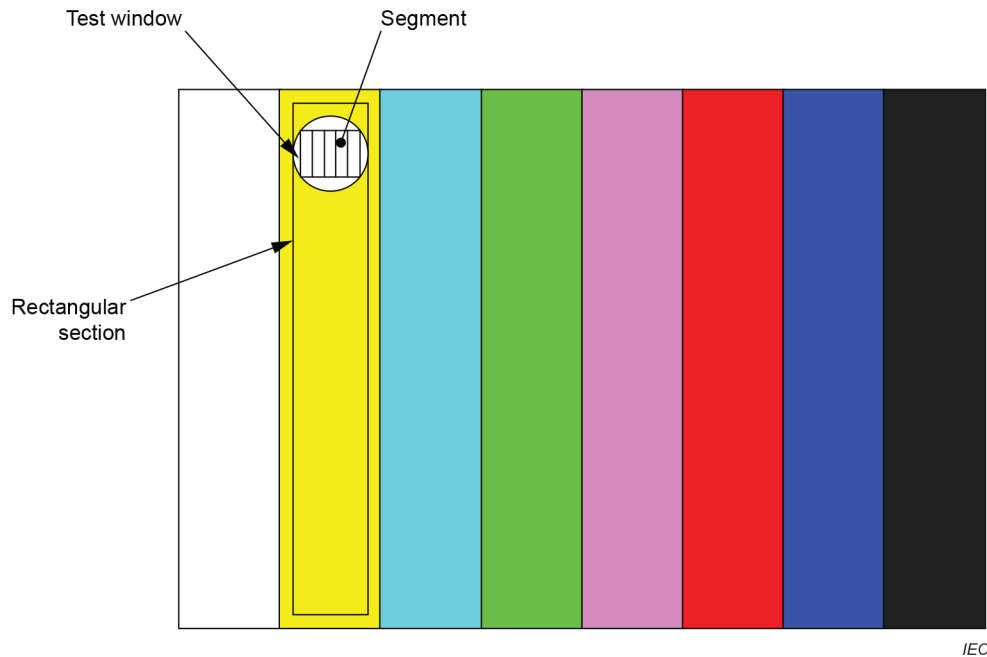


Figure 1 – Colour bar pattern with test elements for detection of analog picture degradation

The above procedure is repeated for each colour bar of the test pattern.

To cover the complete colour bar pattern, the ~~cross-colour~~ transition regions between the bars also have to be analysed. For this purpose, the ~~cross-colour~~ transition regions are divided into vertical segments of seven pixels in height. For each segment, the position of the colour transition edge and its deviation are determined. The evaluation is performed on the assumption of a Gaussian distribution of the colour transition edge in each segment over a defined number of reference pictures, preferably 20 and based on a confidence interval of five times the standard deviation, σ . Picture degradation is present if the position of colour transition in a segment is found to be outside the confidence interval of the corresponding reference segment.

5.3 Algorithm for loss of luminance and contrast

As described under 5.2, the colour bar pattern is converted to a suitable colour space, preferably grey. Any change in luminance or contrast directly affects the grey level, so this type of degradation can be reliably identified. The algorithm detects grey-level errors if the grey level deviates by a minimum of ± 5 grey tones from the grey level of the stored reference picture based on a quantisation of 8 Bit (256 grey tones).

5.4 Algorithm for loss of colour

Colour errors are identified by checking the hue of each colour contained in the colour bar pattern. To this effect, the test window is additionally converted to another colour space, preferably HSL. The algorithm detects colour errors if the hue deviates by a minimum of $\pm 10^\circ$ from the value of the stored reference picture.

5.5 Algorithm for loss of synchronisation

Synchronisation errors or total sync loss manifest themselves by the loss of one or more colour components. The algorithm detects loss of colour components if the hue deviates by a minimum of $\pm 10^\circ$ from the value of the stored reference picture. Total loss of sync is present if the grey level drops below 30 in all colour bars (black screen).

6 Methodology for detection of digital picture degradations

6.1 General

Digital picture degradations are defined as:

- blocking;
- frozen patterns, stop of moving element, blocking in moving element;
- total loss of picture, irrecoverable data stream error.

6.2 Algorithm for blocking

Blocking is characterised by the loss of macroblocks (e.g. 8 pixels × 8 pixels). The edges of lost macroblocks show as interfering lines that can be detected using the method described under 5.2. Rotating the test window is not necessary here as the loss of a macroblock always produces interfering lines at 0° and 90°. The test window size can therefore be expanded to extend over the full colour bar width so that lost macroblocks will be reliably detected also in the cross-colour regions.

6.3 Algorithm for frozen patterns, stop of moving element

Frozen patterns are ~~characterised by a stop of the moving element~~ video images that fail to update over time. To detect this type of picture degradation, a colour bar pattern ~~according to ITU-R BT.801-1~~ is used that includes a rectangular moving element (see Figure 2). The movement of this element is effected by partially shifting the green-to-magenta colour transition by one pixel per frame, the maximum shift being 40 pixels in either direction. The movement of the colour transition (edge) is monitored by means of an edge filter. ~~A stop~~ Freezing of the edge movement is detected if there is no change in the position of the colour transition while the picture is continuously being captured.

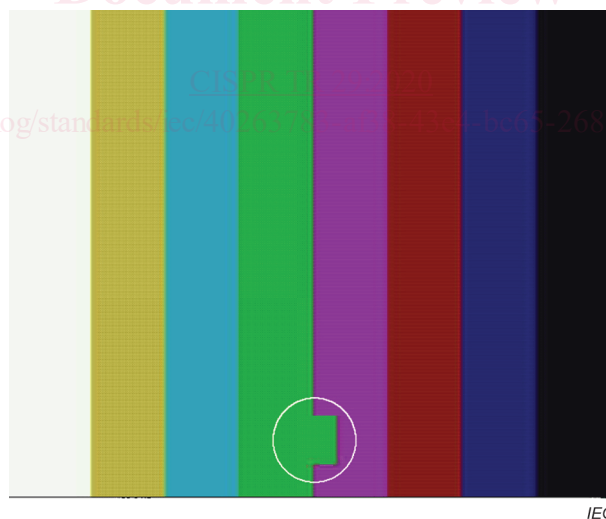


Figure 2 – Colour bar pattern with moving element for detection of digital picture degradation

6.4 Algorithm for total loss of picture, irrecoverable data stream error

Total loss of picture means a drastic change in the grey-level characteristics. This type of picture degradation can also be interpreted as extreme blocking and therefore be detected by means of the algorithm described under 6.2.