

INTERNATIONAL ELECTROTECHNICAL COMMISSION


IEC TR 63040  
Edition 1.0 2016-09

GUIDANCE ON CLEARANCES AND CREEPAGE  
DISTANCES IN PARTICULAR FOR DISTANCES EQUAL  
TO OR LESS THAN 2 mm – TEST RESULTS OF RESEARCH  
ON INFLUENCING PARAMETERS

CORRIGENDUM 1

7.4 Definitions of the water adsorption groups

Replace Figure 7 with the following new Figure 7:

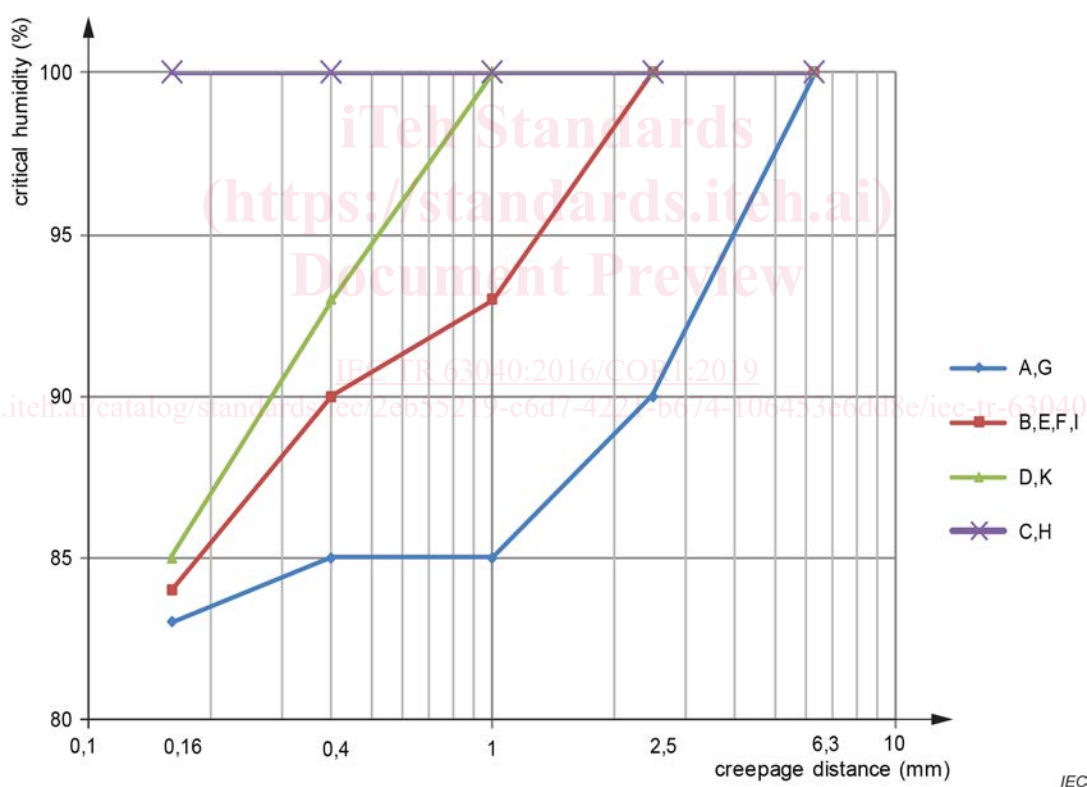

Key

- A Ceramic (unglazed)
- B Glass-epoxy laminate FR4
- C Polyester resin (thermoset), type 802
- D Phenolic resin, type 31.5
- E Polyimide film laminated to glass-epoxy laminate FR4
- F Phenolic resin paper laminate FR2
- G Polyester laminate GPO III
- H Melamine resin, type 150
- I Polybutylenterephthalate
- K Polycarbonate

Figure 7 – Critical relative humidity of insulating materials