



Designation: D975 – 19b

## Standard Specification for Diesel Fuel<sup>1</sup>

This standard is issued under the fixed designation D975; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

*This standard has been approved for use by agencies of the U.S. Department of Defense.*

### 1. Scope\*

1.1 This specification covers seven grades of diesel fuel suitable for various types of diesel engines. These grades are described as follows:

1.1.1 *Grade No. 1-D S15*—A special-purpose, light middle distillate fuel for use in diesel engine applications requiring a fuel with 15 ppm sulfur (maximum) and higher volatility than that provided by Grade No. 2-D S15 fuel.<sup>2</sup>

1.1.2 *Grade No. 1-D S500*—A special-purpose, light middle distillate fuel for use in diesel engine applications requiring a fuel with 500 ppm sulfur (maximum) and higher volatility than that provided by Grade No. 2-D S500 fuel.<sup>2</sup>

1.1.3 *Grade No. 1-D S5000*—A special-purpose, light middle distillate fuel for use in diesel engine applications requiring a fuel with 5000 ppm sulfur (maximum) and higher volatility than that provided by Grade No. 2-D S5000 fuels.

1.1.4 *Grade No. 2-D S15*—A general purpose, middle distillate fuel for use in diesel engine applications requiring a fuel with 15 ppm sulfur (maximum). It is especially suitable for use in applications with conditions of varying speed and load.<sup>2</sup>

1.1.5 *Grade No. 2-D S500*—A general-purpose, middle distillate fuel for use in diesel engine applications requiring a fuel with 500 ppm sulfur (maximum). It is especially suitable for use in applications with conditions of varying speed and load.<sup>2</sup>

1.1.6 *Grade No. 2-D S5000*—A general-purpose, middle distillate fuel for use in diesel engine applications requiring a fuel with 5000 ppm sulfur (maximum), especially in conditions of varying speed and load.

<sup>1</sup> This specification is under the jurisdiction of ASTM Committee D02 on Petroleum Products, Liquid Fuels, and Lubricants and is the direct responsibility of Subcommittee D02.E0 on Burner, Diesel, Non-Aviation Gas Turbine, and Marine Fuels.

Current edition approved June 1, 2019. Published July 2019. Originally approved in 1948. Last previous edition approved in 2019 as D975 – 19a. DOI: 10.1520/D0975-19B.

<sup>2</sup> This fuel complies with 40 CFR Part 80—Control of Air Pollution from New Motor Vehicles: Heavy-Duty Engines and Vehicle Standards and Highway Diesel Fuel Sulfur Control Requirements: Final Rule. Regulation of Fuels and Fuel Additives: Fuel Quality Regulations for Highway Diesel Fuel Sold in 1993 and Later Calendar Years.

1.1.7 *Grade No. 4-D*—A heavy distillate fuel, or a blend of distillate and residual oil, for use in low- and medium-speed diesel engines in applications involving predominantly constant speed and load.

NOTE 1—A more detailed description of the grades of diesel fuels is given in X1.2.

NOTE 2—The Sxxx designation has been adopted to distinguish grades by sulfur rather than using words such as “Low Sulfur” as previously because the number of sulfur grades is growing and the word descriptions were thought to be not precise. S5000 grades correspond to the so-called “regular” sulfur grades, the previous No. 1-D and No. 2-D. S500 grades correspond to the previous “Low Sulfur” grades. S15 grades were not in the previous grade system and are commonly referred to as “Ultra-Low Sulfur” grades or ULSD.

1.2 This specification, unless otherwise provided by agreement between the purchaser and the supplier, prescribes the required properties of diesel fuels at the time and place of delivery.

1.2.1 Nothing in this specification shall preclude observance of federal, state, or local regulations which can be more restrictive.

NOTE 3—The generation and dissipation of static electricity can create problems in the handling of distillate diesel fuels. For more information on the subject, see Guide D4865.

1.3 The values stated in SI units are to be regarded as standard. No other units of measurement are included in this standard.

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

### 2. Referenced Documents

#### 2.1 ASTM Standards:<sup>3</sup>

D56 Test Method for Flash Point by Tag Closed Cup Tester  
D86 Test Method for Distillation of Petroleum Products and

<sup>3</sup> For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard’s Document Summary page on the ASTM website.

\*A Summary of Changes section appears at the end of this standard

- Liquid Fuels at Atmospheric Pressure
- D93** Test Method for Flash Point by Pensky-Martens Closed Cup Tester
- D129** Test Method for Sulfur in Petroleum Products (General High Pressure Decomposition Device Method)
- D130** Test Method for Corrosiveness to Copper from Petroleum Products by Copper Strip Test
- D445** Test Method for Kinematic Viscosity of Transparent and Opaque Liquids (and Calculation of Dynamic Viscosity)
- D482** Test Method for Ash from Petroleum Products
- D524** Test Method for Ramsbottom Carbon Residue of Petroleum Products
- D613** Test Method for Cetane Number of Diesel Fuel Oil
- D1266** Test Method for Sulfur in Petroleum Products (Lamp Method)
- D1319** Test Method for Hydrocarbon Types in Liquid Petroleum Products by Fluorescent Indicator Adsorption
- D1552** Test Method for Sulfur in Petroleum Products by High Temperature Combustion and Infrared (IR) Detection or Thermal Conductivity Detection (TCD)
- D1796** Test Method for Water and Sediment in Fuel Oils by the Centrifuge Method (Laboratory Procedure)
- D2274** Test Method for Oxidation Stability of Distillate Fuel Oil (Accelerated Method)
- D2500** Test Method for Cloud Point of Petroleum Products and Liquid Fuels
- D2622** Test Method for Sulfur in Petroleum Products by Wavelength Dispersive X-ray Fluorescence Spectrometry
- D2624** Test Methods for Electrical Conductivity of Aviation and Distillate Fuels
- D2709** Test Method for Water and Sediment in Middle Distillate Fuels by Centrifuge
- D2880** Specification for Gas Turbine Fuel Oils
- D2887** Test Method for Boiling Range Distribution of Petroleum Fractions by Gas Chromatography
- D3120** Test Method for Trace Quantities of Sulfur in Light Liquid Petroleum Hydrocarbons by Oxidative Microcoulometry
- D3828** Test Methods for Flash Point by Small Scale Closed Cup Tester
- D4057** Practice for Manual Sampling of Petroleum and Petroleum Products
- D4176** Test Method for Free Water and Particulate Contamination in Distillate Fuels (Visual Inspection Procedures)
- D4177** Practice for Automatic Sampling of Petroleum and Petroleum Products
- D4294** Test Method for Sulfur in Petroleum and Petroleum Products by Energy Dispersive X-ray Fluorescence Spectrometry
- D4306** Practice for Aviation Fuel Sample Containers for Tests Affected by Trace Contamination
- D4308** Test Method for Electrical Conductivity of Liquid Hydrocarbons by Precision Meter
- D4539** Test Method for Filterability of Diesel Fuels by Low-Temperature Flow Test (LTFT)
- D4737** Test Method for Calculated Cetane Index by Four Variable Equation
- D4865** Guide for Generation and Dissipation of Static Electricity in Petroleum Fuel Systems
- D5304** Test Method for Assessing Middle Distillate Fuel Storage Stability by Oxygen Overpressure
- D5453** Test Method for Determination of Total Sulfur in Light Hydrocarbons, Spark Ignition Engine Fuel, Diesel Engine Fuel, and Engine Oil by Ultraviolet Fluorescence
- D5771** Test Method for Cloud Point of Petroleum Products and Liquid Fuels (Optical Detection Stepped Cooling Method)
- D5772** Test Method for Cloud Point of Petroleum Products and Liquid Fuels (Linear Cooling Rate Method)
- D5773** Test Method for Cloud Point of Petroleum Products and Liquid Fuels (Constant Cooling Rate Method)
- D5842** Practice for Sampling and Handling of Fuels for Volatility Measurement
- D5854** Practice for Mixing and Handling of Liquid Samples of Petroleum and Petroleum Products
- D6078** Test Method for Evaluating Lubricity of Diesel Fuels by the Scuffing Load Ball-on-Cylinder Lubricity Evaluator (SLBOCLE)
- D6079** Test Method for Evaluating Lubricity of Diesel Fuels by the High-Frequency Reciprocating Rig (HFRR)
- D6217** Test Method for Particulate Contamination in Middle Distillate Fuels by Laboratory Filtration
- D6304** Test Method for Determination of Water in Petroleum Products, Lubricating Oils, and Additives by Coulometric Karl Fischer Titration
- D6371** Test Method for Cold Filter Plugging Point of Diesel and Heating Fuels
- D6468** Test Method for High Temperature Stability of Middle Distillate Fuels
- D6469** Guide for Microbial Contamination in Fuels and Fuel Systems
- D6751** Specification for Biodiesel Fuel Blend Stock (B100) for Middle Distillate Fuels
- D6890** Test Method for Determination of Ignition Delay and Derived Cetane Number (DCN) of Diesel Fuel Oils by Combustion in a Constant Volume Chamber
- D6898** Test Method for Evaluating Diesel Fuel Lubricity by an Injection Pump Rig
- D7039** Test Method for Sulfur in Gasoline, Diesel Fuel, Jet Fuel, Kerosine, Biodiesel, Biodiesel Blends, and Gasoline-Ethanol Blends by Monochromatic Wavelength Dispersive X-ray Fluorescence Spectrometry
- D7042** Test Method for Dynamic Viscosity and Density of Liquids by Stabinger Viscometer (and the Calculation of Kinematic Viscosity)
- D7094** Test Method for Flash Point by Modified Continuously Closed Cup (MCCCFP) Tester
- D7170** Test Method for Determination of Derived Cetane Number (DCN) of Diesel Fuel Oils—Fixed Range Injection Period, Constant Volume Combustion Chamber Method
- D7220** Test Method for Sulfur in Automotive, Heating, and Jet Fuels by Monochromatic Energy Dispersive X-ray Fluorescence Spectrometry

- D7344** Test Method for Distillation of Petroleum Products and Liquid Fuels at Atmospheric Pressure (Mini Method)
- D7345** Test Method for Distillation of Petroleum Products and Liquid Fuels at Atmospheric Pressure (Micro Distillation Method)
- D7371** Test Method for Determination of Biodiesel (Fatty Acid Methyl Esters) Content in Diesel Fuel Oil Using Mid Infrared Spectroscopy (FTIR-ATR-PLS Method)
- D7467** Specification for Diesel Fuel Oil, Biodiesel Blend (B6 to B20)
- D7545** Test Method for Oxidation Stability of Middle Distillate Fuels—Rapid Small Scale Oxidation Test (RSSOT)
- D7619** Test Method for Sizing and Counting Particles in Light and Middle Distillate Fuels, by Automatic Particle Counter
- D7668** Test Method for Determination of Derived Cetane Number (DCN) of Diesel Fuel Oils—Ignition Delay and Combustion Delay Using a Constant Volume Combustion Chamber Method
- D7683** Test Method for Cloud Point of Petroleum Products and Liquid Fuels (Small Test Jar Method)
- D7688** Test Method for Evaluating Lubricity of Diesel Fuels by the High-Frequency Reciprocating Rig (HFRR) by Visual Observation
- D7689** Test Method for Cloud Point of Petroleum Products and Liquid Fuels (Mini Method)
- D7861** Test Method for Determination of Fatty Acid Methyl Esters (FAME) in Diesel Fuel by Linear Variable Filter (LVF) Array Based Mid-Infrared Spectroscopy
- D8183** Test Method for Determination of Indicated Cetane Number (ICN) of Diesel Fuel Oils using a Constant Volume Combustion Chamber—Reference Fuels Calibration Method
- D8148** Test Method for Spectroscopic Determination of Haze in Fuels
- E29** Practice for Using Significant Digits in Test Data to Determine Conformance with Specifications
- E1064** Test Method for Water in Organic Liquids by Coulometric Karl Fischer Titration

## 2.2 Other Documents:

- 26 CFR Part 48** Manufacturers and Realtors Excise Taxes<sup>4</sup>
- 40 CFR Part 80** Regulation of Fuels and Fuel Additives<sup>4</sup>
- API RP 2003** Protection Against Ignitions Arising Out of Static, Lightning, and Stray Currents<sup>5</sup>
- EN 14078** Liquid petroleum products—Determination of fatty acid methyl esters (FAME) in middle distillates—Infrared spectroscopy method<sup>6</sup>
- EN 15751** Automotive fuels—Fatty acid methyl ester (FAME) fuel and blends with diesel fuel—Determination of oxidation stability by accelerated oxidation method<sup>6</sup>

- IP 156** Determination of hydrocarbon types in petroleum products—Fluorescent indicator adsorption method<sup>7</sup>
- ISO 4406** Hydraulic fluid power—Fluids—Method for coding the level of contamination by solid particles<sup>5</sup>
- ISO 16889** Hydraulic fluid power—Filters—Multi-pass method for evaluating filtration performance of a filter element<sup>5</sup>

## 3. Terminology

### 3.1 Definitions:

3.1.1 *additive, n—in diesel fuels and fuel oils*, a substance added to diesel fuel or fuel oil at a blend level not greater than 1 % by volume of the finished fuel.

3.1.1.1 *Discussion*—Additives are generally included in finished diesel fuel or fuel oil to enhance performance properties (for example, cetane number, lubricity, cold flow, etc.).

3.1.1.2 *Discussion*—Additives that contain hydrocarbon oil blended with other substances may exclude the hydrocarbon oil portion for determination of the volume percent of the additive in the finished fuel.

3.1.2 *alternative blendstock, n—in diesel fuels and fuel oils*, a non-hydrocarbon oil substance added to diesel fuel and fuel oil at blend levels greater than 1 % by volume of the finished fuel.

3.1.2.1 *Discussion*—An alternative blendstock should normally have an industry consensus standard or an annex in this specification that defines its physical and chemical properties.

3.1.2.2 *Discussion*—See **Appendix X7** for guidance regarding new materials for #1-D and #2-D grades of diesel fuels.

3.1.3 *biodiesel, n*—fuel comprised of mono-alkyl esters of long chain fatty acids derived from vegetable oils or animal fats, designated B100.

3.1.4 *biodiesel blend (BXX), n*—blend of biodiesel fuel with diesel fuels and fuel oils.

3.1.4.1 *Discussion*—In the abbreviation, BXX, the XX represents the volume percentage of biodiesel fuel in the blend.

3.1.5 *hydrocarbon oil, n*—a homogeneous mixture with elemental composition primarily of carbon and hydrogen that may also contain sulfur, oxygen, or nitrogen from residual impurities and contaminants associated with the fuel's raw materials and manufacturing processes and excluding added oxygenated materials.

3.1.5.1 *Discussion*—Neither macro nor micro emulsions are included in this definition since neither are homogeneous mixtures.

3.1.5.2 *Discussion*—Examples of excluded oxygenated materials are alcohols, esters, ethers, and triglycerides.

3.1.5.3 *Discussion*—The hydrocarbon oil may be manufactured from a variety of raw materials, for example petroleum (crude oil), oil sands, natural gas, coal, and biomass. **Appendix X7** discusses some matters for consideration regarding the use of diesel fuels from feedstocks other than petroleum.

3.1.6 *switch loading, n—of liquid fuels*, the practice of loading low vapor pressure product (for example, diesel fuel)

<sup>4</sup> Available from U.S. Government Printing Office, Superintendent of Documents, 732 N. Capitol St., NW, Mail Stop: SDE, Washington, DC 20401.

<sup>5</sup> Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036, <http://www.ansi.org>.

<sup>6</sup> Available from the National CEN members listed on the CEN website ([www.cenorm.be](http://www.cenorm.be)) or from the CEN/TC 19 Secretariat ([astm.@nen.nl](mailto:astm.@nen.nl)).

<sup>7</sup> Available from Energy Institute, 61 New Cavendish St., London, W1G 7AR, U.K., <http://www.energyinst.org>.

into an empty or near-empty fixed or portable container that previously held a high or intermediate vapor pressure product (such as gasoline or solvent) without prior compartment cleaning treatment and inert gas purging; and the reverse procedure where a high vapor pressure product is added to a container that previously held a low vapor pressure product.

3.1.6.1 *Discussion*—Since middle distillate fuels have flash points above 38 °C, during normal distribution of these fuels, the atmosphere above the fuels in a container such as a tanker truck, rail car, or barge, is normally below the lower explosive limit, so there is low risk of fire or explosion should an electrostatic discharge (spark) occur. However, when the previous load in the compartment was a volatile, flammable fuel such as gasoline, and if some residual fuel vapor or mist remains in the compartment, and the container has a mixture of air and fuel vapor or mist (that is, not purged with an inert gas), then there is a risk that the atmosphere in the container being filled could be in the explosive range creating a hazard should an electrostatic discharge occur.

### 3.2 Definitions of Terms Specific to This Standard:

3.2.1 *S(numerical specification maximum)*—indicates the maximum sulfur content, in weight ppm (µg/g), allowed by this specification in a diesel fuel grade.

3.2.1.1 *Discussion*—Of the seven diesel fuel grades specified in this standard, six have important distinguishing maximum sulfur regulatory requirements. These are Grades No. 1-D S15, No. 1-D S500, No. 1-D S5000, No. 2-D S15, No. 2-D S500 and No. 2-D S5000. The seventh grade, No. 4-D, is distinguished from these other grades by many major properties in addition to sulfur (unregulated maximum), and therefore is not included in this designation system. Thus, Grade No. 4-D does not have the designation S20000 as part of its grade name.

## 4. Sampling, Containers, and Sample Handling

4.1 It is strongly advised to review all test methods prior to sampling to understand the importance and effects of sampling technique, proper containers, and special handling required for each test method.

4.2 Correct sampling procedures are critical to obtaining a representative sample of the diesel fuel to be tested. Refer to [Appendix X2](#) for recommendations. The recommended procedures or practices provide techniques useful in the proper sampling or handling of diesel fuels.

## 5. Test Methods

5.1 The requirements enumerated in this specification shall be determined in accordance with the following methods:

5.1.1 *Flash Point*—Test Methods [D93](#), except where other methods are prescribed by law. For all grades, Test Methods

[D3828](#) and [D7094](#) may be used as alternatives with the same limits. For Grades No. 1-D S15, No. 1-D S500, No. 1-D S5000, No. 2-D S15, No. 2-D S500, and No. 2-D S5000, Test Method [D56](#) may be used as an alternative with the same limits, provided the flash point is below 93 °C and the viscosity is below 5.5 mm<sup>2</sup>/s at 40 °C. This test method will give slightly lower values. In cases of dispute, Test Methods [D93](#) shall be used as the referee method. Test Method [D56](#) may not be used as the alternative method for Grade No. 4-D because its minimum viscosity limit is 5.5 mm<sup>2</sup>/s at 40 °C.

5.1.2 *Cloud Point*—Test Method [D2500](#). For all fuel grades in [Table 1](#), bias-corrected results from the automatic Test Methods [D5771](#), [D5772](#), [D5773](#), [D7683](#), or [D7689](#) may be used as alternatives with the same limits. Bias-correction equations are noted in the respective precision sections of each automatic test method. In case of dispute, Test Method [D2500](#) shall be the referee method.

5.1.3 *Water and Sediment*—Test Method [D2709](#) is used for fuel Grades No. 1-D S15, No. 1-D S500, No. 1-D S5000, No. 2-D S15, No. 2-D S500, and No. 2-D S5000. Test Method [D1796](#) is used for Grade No. 4-D. See [Appendix X8](#) for additional guidance on water and sediment in Grades No. 1-D and 2-D diesel fuels.

5.1.4 *Carbon Residue*—Test Method [D524](#) is used for fuel Grades No. 1-D S15, No. 1-D S500, No. 1-D S5000, No. 2-D S15, No. 2-D S500 and No. 2-D S5000. Grade No. 4-D does not have a limit for carbon residue.

5.1.5 *Ash*—Test Method [D482](#) is used for all grades in [Table 1](#).

5.1.6 *Distillation*—Test Method [D86](#) is used for Grades No. 1-D S15, No. 1-D S500, No. 1-D S5000, No. 2-D S15, No. 2-D S500, and No. 2-D S5000. For all grades, Test Method [D2887](#), [D7344](#), or [D7345](#) can be used as an alternative. Results from Test Method [D2887](#) shall be reported as “Predicted D86” results by application of the correlation in [Appendix X4](#) of Test Method [D2887](#) to convert the values. Results from Test Methods [D7344](#) and [D7345](#) shall be reported as “Predicted D86” results by application of the corrections described in Test Methods [D7344](#) and [D7345](#) to improve agreement with D86 values. In case of dispute, Test Method [D86](#) shall be the referee method. Grade No. 4-D does not have distillation requirements.

5.1.7 *Viscosity*—Test Method [D445](#) is used for all fuel grades in [Table 1](#). Bias-corrected values from Test Method [D7042](#) may be used as alternative results for Test Method [D445](#) on Grades No. 1-D and No. 2-D with the same limits. Section 15, Precision and Bias, of Test Method [D7042](#) contains bias-correction information. In case of dispute, Test Method [D445](#) shall be used as the referee method.



**TABLE 1 Detailed Requirements for Diesel Fuel<sup>A, B</sup>**

Property	ASTM Test Method <sup>C</sup>	Grade						
		No. 1-D S15	No. 1-D S500 <sup>D</sup>	No. 1-D S5000 <sup>E</sup>	No. 2-D S15 <sup>F</sup>	No. 2-D S500 <sup>D, F</sup>	No. 2-D S5000 <sup>E, F</sup>	No. 4-D <sup>E</sup>
Flash Point, °C, min.	D93	38	38	38	52 <sup>F</sup>	52 <sup>F</sup>	52 <sup>F</sup>	55
Water and Sediment, percent volume, max	D2709	0.05	0.05	0.05	0.05	0.05	0.05	...
	D1796	...	...	...	...	...	...	0.50
Distillation Temperature, °C 90 %, percent volume recovered	D86							
min		...	...	...	282 <sup>F</sup>	282 <sup>F</sup>	282 <sup>F</sup>	...
max		288	288	288	338	338	338	...
Kinematic Viscosity, mm <sup>2</sup> /S at 40 °C	D445							
min		1.3	1.3	1.3	1.9 <sup>F</sup>	1.9 <sup>F</sup>	1.9 <sup>F</sup>	5.5
max		2.4	2.4	2.4	4.1	4.1	4.1	24.0
Ash percent mass, max	D482	0.01	0.01	0.01	0.01	0.01	0.01	0.10
Sulfur, ppm (µg/g) <sup>G</sup> max	D5453	15	...	...	15	...	...	...
percent mass, max	D2622 <sup>H</sup>	...	0.05	0.50	...	0.05	0.50	2.00
Copper strip corrosion rating, max (3 h at a minimum control temperature of 50 °C)	D130	No. 3	No. 3	No. 3	No. 3	No. 3	No. 3	...
Cetane number, min <sup>I</sup>	D613	40. <sup>J</sup>	40. <sup>J</sup>	40. <sup>J</sup>	40. <sup>J</sup>	40. <sup>J</sup>	40. <sup>J</sup>	30. <sup>J</sup>
One of the following properties must be met:								
(1) Cetane index, min.	D976–80 <sup>H</sup>	40	40	...	40	40	...	...
(2) Aromaticity, percent volume, max	D1319 <sup>H, K</sup>	35	35	...	35	35	...	...
Operability Requirements								
Cloud point, °C, max	D2500	L	L	L	L	L	L	...
or								
LTFT/CFPP, °C, max	D4539/D6371							
Ramsbottom carbon residue on 10 % distillation residue, percent mass, max	D524	0.15	0.15	0.15	0.35	0.35	0.35	...
Lubricity, HFRR @ 60 °C, micron, max	D6079/D7688	520	520	520	520	520	520	...
Conductivity, pS/m or Conductivity Units (C.U.), min	D2624/D4308	25 <sup>M</sup>	25 <sup>M</sup>	25 <sup>M</sup>	25 <sup>M</sup>	25 <sup>M</sup>	25 <sup>M</sup>	...

<sup>A</sup> To meet special operating conditions, modifications of individual limiting requirements may be agreed upon between purchaser, seller, and manufacturer.

<sup>B</sup> See Sections 6 and 7 for further statements on diesel fuel requirements.

<sup>C</sup> The test methods indicated are the approved referee methods. Other acceptable methods are indicated in 5.1.

<sup>D</sup> Under United States regulations, if Grades No. 1–D S500 or No. 2–D S500 are sold for tax exempt purposes then, at or beyond terminal storage tanks, they are required by 26 CFR Part 48 to contain the dye Solvent Red 164 at a concentration spectrally equivalent to 3.9 lb of the solid dye standard Solvent Red 26 per thousand barrels of diesel fuel or kerosine, or the tax must be collected.

<sup>E</sup> Under United States regulations, Grades No.1–D S5000, No. 2–D S5000, and No. 4–D are required by 40 CFR Part 80 to contain a sufficient amount of the dye Solvent Red 164 so its presence is visually apparent. At or beyond terminal storage tanks, they are required by 26 CFR Part 48 to contain the dye Solvent Red 164 at a concentration spectrally equivalent to 3.9 lb of the solid dye standard Solvent Red 26 per thousand barrels of diesel fuel or kerosine.

<sup>F</sup> When a cloud point less than –12 °C is specified, as can occur during cold months, it is permitted and normal blending practice to combine Grades No. 1 and No. 2 to meet the low temperature requirements. In that case, the minimum flash point shall be 38 °C, the minimum viscosity at 40 °C shall be 1.7 mm<sup>2</sup>/s, and the minimum 90 % recovered temperature shall be waived.

<sup>G</sup> Other sulfur limits can apply in selected areas in the United States and in other countries.

<sup>H</sup> These test methods are specified in 40 CFR Part 80 for S500 grades.

<sup>I</sup> Where cetane number by Test Method D613 is not available, Test Method D4737 can be used as an approximation. Although biodiesel blends are excluded from the scope of Test Method D4737, the results of Test Method D4737 for up to B5 blends can be used as an approximation.

<sup>J</sup> Low ambient temperatures as well as engine operation at high altitudes may require the use of fuels with higher cetane ratings.

<sup>K</sup> See 5.1.12.

<sup>L</sup> It is unrealistic to specify low temperature properties that will ensure satisfactory operation at all ambient conditions. In general, cloud point Low Temperature Flow Test, and Cold Filter Plugging Point Test may be used as an estimate of operating temperature limits for Grades No. 1–D S15; No. 2–D S15; No. 1–D S500; No. 2–D S500; and No. 1–D S5000 and No. 2–D S5000 diesel fuel. However, satisfactory operation below the cloud point may be achieved depending on equipment design, operating conditions, and the use of flow-improver additives as described in X5.1.2. Appropriate low temperature operability properties should be agreed upon between the fuel supplier and purchaser for the intended use and expected ambient temperatures. Test Methods D4539 and D6371 may be especially useful to estimate vehicle low temperature operability limits when flow improvers are used. Due to fuel delivery system, engine design, and test method differences, low temperature operability tests may not provide the same degree of protection in various vehicle operating classes. Tenth percentile minimum air temperatures for U.S. locations are provided in Appendix X5 as a means of estimating expected regional temperatures. The tenth percentile minimum air temperatures can be used to estimate expected regional target temperatures for use with Test Methods D2500, D4539, and D6371. Refer to X5.1.3 for further general guidance on test application.

<sup>M</sup> The electrical conductivity of the diesel fuel is measured at the time and temperature of the fuel at delivery. The 25 pS/m minimum conductivity requirement applies at all instances of high velocity transfer (7 m/s) but sometimes lower velocities, see 8.1 for detailed requirements) into mobile transport (for example, tanker trucks, rail cars, and barges).

5.1.8 Sulfur—The following list shows the referee test methods and alternative test methods for sulfur and the corresponding fuel grades to which each applies.

Sulfur Test Method	Grades	Sulfur Test Method	Grades
D129	No. 1-D S5000, No. 2-D S5000, No. 4-D	D1266	No. 1-D S500, No. 2-D S500
		D1552	No. 1-D S5000, No. 2-D S5000, No. 4-D

Sulfur Test Method	Grades
<b>D2622</b> (referee for S500, S5000, and No. 4 Grades) <b>D3120</b>	All Grades  No. 1-D S15, No. 2-D S15 No. 1-D S500, No. 2-D S500 (If the fuel contains biodiesel, this method may not be applicable as it is limited to oxygenates with a boiling range of 26 °C to 274 °C) No. 1-D S500, No. 2-D S500 No. 1- D S5000, No. 2-D S5000, No. 4-D All Grades
<b>D4294</b>	No. 1-D S500, No. 2-D S500 No. 1- D S5000, No. 2-D S5000, No. 4-D All Grades
<b>D5453</b> (referee for S15 grades) <b>D7039</b>	No. 1-D S15, No. 2-D S15 No. 1-D S500, No. 2-D S500 No. 1-D S15, No. 1-D S500 No. 2-D S15, No. 2-D S500
<b>D7220</b>	No. 1-D S15, No. 2-D S15 No. 1-D S500, No. 2-D S500 No. 1-D S15, No. 1-D S500 No. 2-D S15, No. 2-D S500

5.1.9 *Copper Corrosion*—Test Method **D130**, 3 h test at a minimum control temperature of 50 °C. This test method is used for fuel Grades No. 1-D S15, No. 1-D S500, No. 1-D S5000, No. 2-D S15, No. 2-D S500 and No. 2-D S5000. Grade No. 4-D does not have a copper corrosion requirement.

5.1.10 *Cetane Number*—Test Method **D613** is used for all fuel grades in **Table 1**. Test Methods **D6890**, **D7170**, **D7668** (see **Note 4**), or **D8183** (see **Note 5**) may be used for all No. 1-D and No. 2-D grades with the DCN or ICN (**D8183**) result being compared to the cetane number specification requirement of 40. Test Method **D613** shall be the referee method.

NOTE 4—Precision from Test Method **D7668** were obtained from results produced by laboratories using externally obtained pre-blended calibration reference material.

NOTE 5—Precision from Test Method **D8183** were obtained from results produced by laboratories using pre-blended calibration reference materials from a single source.

5.1.11 *Cetane Index*—Test Methods D976–80 is used for fuel Grades No. 1-D S15, No. 1-D S500, No. 2-D S15 and No. 2-D S500. Grades No. 1-D S5000, No. 2-D S5000 and No. 4-D do not have an aromatics content requirement, so do not use this test method as a surrogate for aromatics content.

5.1.12 *Aromaticity*—Test Method **D1319**. This test method provides an indication of the aromatics content of fuels. For fuels with a maximum final boiling point of 315 °C, this method is a measurement of the aromatic content of the fuel. This test method is used for fuel Grades No. 1-D S15, No. 1-D S500, No. 2-D S15 and No. 2-D S500. Grades No. 1-D S5000, No. 2-D S5000 and No. 4-D do not have an aromatics content requirement. The supplier of the fluorescent indicator dyed gel used in Test Method **D1319** (and IP 156) is no longer able to supply the dye needed for the method to work with diesel fuel. Lot numbers 3000000975 and above will not provide correct aromatics values.

5.1.13 *Lubricity*—Test Method **D6079** or **D7688**. Test Method **D6079** shall be the referee method.

5.1.14 *Conductivity*—Both conductivity test methods, Test Methods **D2624** and **D4308** are allowed for all grades of No. 1

and No. 2 diesel fuels. There is no conductivity requirement for No. 4 diesel fuel. For conductivities below 1 pS/m, Test Method **D4308** is preferred.

## 6. Workmanship

6.1 The diesel fuel shall be visually free of undissolved water, sediment, and suspended matter.

6.2 The diesel fuel shall also be free of any adulterant or contaminant that can render the fuel unacceptable for its commonly used applications.

## 7. Requirements

7.1 The grades of diesel fuels herein specified shall be hydrocarbon oils, except as provided in **7.3**, with the inclusion of additives to enhance performance, if required, conforming to the detailed requirements shown in **Table 1**.

NOTE 6—Additives are generally included in finished diesel fuel to improve performance properties (cetane number, lubricity, cold flow, and so forth).

7.2 *Grades No. 2-D S15, No. 2-D S500 and No. 2-D S5000*—When a cloud point less than –12 °C is specified, as can occur during cold months, it is permitted and normal blending practice to combine Grades No. 1 and No. 2 to meet the low temperature requirements. In that case, the minimum flash point shall be 38 °C, the minimum viscosity at 40 °C shall be 1.7 mm<sup>2</sup>/s, and the minimum 90 % recovered temperature shall be waived.

### 7.3 Alternative Blendstocks:

7.3.1 *Fuels Blended with Biodiesel*—The detailed requirements for fuels blended with biodiesel shall be as follows:

7.3.1.1 *Biodiesel for Blending*—If biodiesel is a component of any diesel fuel, the biodiesel shall meet the requirements of Specification **D6751**.

7.3.1.2 Diesel fuel containing up to 5 % volume biodiesel shall meet the requirements for the appropriate grade No. 1-D or No. 2-D fuel, as listed in **Table 1**.

7.3.1.3 Test Method **D7371** shall be used for determination of the volume percent biodiesel in a biodiesel blend. Test Method EN 14078 or Test Method **D7861** may also be used. In cases of dispute, Test Method **D7371** shall be the referee test method. See Practice **E29** for guidance on significant digits.

7.3.1.4 Diesel fuels containing more than 5 % volume biodiesel component are not included in this specification.

7.3.1.5 Biodiesel blends with No. 4-D fuel are not covered by this specification.

## 8. Precautionary Notes on Conductivity

8.1 Accumulation of static charge occurs when a hydrocarbon liquid flows with respect to another surface. The electrical conductivity requirement of 25 pS/m minimum at temperature of delivery shall apply when the transfer conditions in **Table 2** exist for the delivery into a mobile transport container (for example, tanker trucks, railcars, and barges).

## 9. Keywords

9.1 biodiesel; biodiesel blend; diesel; diesel fuel; fuel oil; petroleum and petroleum products

**TABLE 2 Transfer Conditions**

Maximum Pipe Diameter (for a distance of 30 s upstream of delivery nozzle)	When Filling Tank Truck Compartments	When Filling Undivided Rail Car Compartments	When Filling Marine Vessels
0.1023 m	fuel velocity $\geq$ 4.9 m/s	fuel velocity $\geq$ 7.0 m/s	fuel velocity $\geq$ 7.0 m/s
0.1541 m	fuel velocity $\geq$ 3.24 m/s	fuel velocity $\geq$ 5.20 m/s	fuel velocity $\geq$ 7.0 m/s
0.2027 m	fuel velocity $\geq$ 2.47 m/s	fuel velocity $\geq$ 3.90 m/s	fuel velocity $\geq$ 7.0 m/s
0.2545 m	fuel velocity $\geq$ 1.96 m/s	fuel velocity $\geq$ 3.14 m/s	fuel velocity $\geq$ 7.0 m/s

## APPENDIXES

### (Nonmandatory Information)

#### X1. SIGNIFICANCE OF ASTM SPECIFICATION FOR DIESEL FUELS

##### X1.1 Introduction

X1.1.1 The properties of commercial fuel oils and diesel fuels depend on the refining practices employed and the nature of the crude oils from which they are produced. Distillate fuel oils, for example, can be produced within the boiling range of 150 °C and 400 °C having many possible combinations of various properties, such as volatility, ignition quality, viscosity, and other characteristics.

##### X1.2 Grades

X1.2.1 This specification is intended as a statement of permissible limits of significant fuel properties used for specifying the wide variety of commercially available diesel fuels. Limiting values of significant properties are prescribed for seven grades of diesel fuels. These grades and their general applicability for use in diesel engines are broadly indicated as follows:

X1.2.2 *Grade No. 1-D S15*—Grade No. 1-D S15 comprises the class of very low sulfur, volatile diesel fuels from kerosine to the intermediate middle distillates. Fuels within this grade are applicable for use in (1) high-speed diesel engines and diesel engine applications that require ultra-low sulfur fuels, (2) applications necessitating frequent and relatively wide variations in loads and speeds, and (3) applications where abnormally low operating temperatures are encountered.

X1.2.3 *Grade No. 1-D S500*—Grade No. 1-D S500 comprises the class of low-sulfur, volatile diesel fuels from kerosine to the intermediate middle distillates. Fuels within this grade are applicable for use in (1) high-speed diesel engines that require low sulfur fuels, (2) in applications necessitating frequent and relatively wide variations in loads and speeds, and (3) in applications where abnormally low operating temperatures are encountered.

X1.2.4 *Grade No. 1-D S5000*—Grade No. 1-D S5000 comprises the class of volatile diesel fuels from kerosine to the intermediate middle distillates. Fuels within this grade are applicable for use in high-speed diesel engines applications necessitating frequent and relatively wide variations in loads and speeds, and also for use in cases where abnormally low operating temperatures are encountered.

X1.2.5 *Grade No. 2-D S15*—Grade No. 2-D S15 includes the class of very low sulfur, middle distillate gas oils of lower volatility than Grade No. 1-D S15. These fuels are applicable for use in (1) high speed diesel engines and diesel engine applications that require ultra-low sulfur fuels, (2) applications necessitating relatively high loads and uniform speeds, or (3) diesel engines not requiring fuels having higher volatility or other properties specified in Grade No. 1-D S15.

X1.2.6 *Grade No. 2-D S500*—Grade No. 2-D S500 includes the class of low-sulfur, middle distillate gas oils of lower volatility than Grade No. 1-D S500. These fuels are applicable for use in (1) high-speed diesel engine applications that require low sulfur fuels, (2) applications necessitating relatively high loads and uniform speeds, or (3) diesel engines not requiring fuels having higher volatility or other properties specified for Grade No. 1-D S500.

X1.2.7 *Grade No. 2-D S5000*—Grade No. 2-D S5000 includes the class of middle distillate gas oils of lower volatility than Grade No. 1-D S5000. These fuels are applicable for use in (1) high-speed diesel engines in applications necessitating relatively high loads and uniform speeds, or (2) in diesel engines not requiring fuels having higher volatility or other properties specified for Grade No. 1-D S5000.

X1.2.8 *Grade No. 4-D*—Grade No. 4-D comprises the class of more viscous middle distillates and blends of these middle distillates with residual fuel oils. Fuels within this grade are applicable for use in low- and medium-speed diesel engines in applications necessitating sustained loads at substantially constant speed.

##### X1.3 Selection of Particular Grade

X1.3.1 The selection of a particular diesel fuel from one of these seven ASTM grades for use in a given engine requires consideration of the following factors:

- X1.3.1.1 Fuel price and availability,
- X1.3.1.2 Maintenance considerations,
- X1.3.1.3 Engine size and design,
- X1.3.1.4 Emission control systems,
- X1.3.1.5 Speed and load ranges,
- X1.3.1.6 Frequency of speed and load changes, and

X1.3.1.7 Atmospheric conditions. Some of these factors can influence the required fuel properties outlined as follows:

#### X1.4 Cetane Number

X1.4.1 Cetane number is a measure of the ignition quality of the fuel and influences combustion roughness. The cetane number requirements depend on engine design, size, nature of speed and load variations, and on starting and atmospheric conditions. Increase in cetane number over values actually required does not materially improve engine performance. Accordingly, the cetane number specified should be as low as possible to assure maximum fuel availability.

#### X1.5 Distillation

X1.5.1 The fuel volatility requirements depend on engine design, size, nature of speed and load variations, and starting and atmospheric conditions. For engines in services involving rapidly fluctuating loads and speeds as in bus and truck operation, the more volatile fuels can provide best performance, particularly with respect to smoke and odor. However, best fuel economy is generally obtained from the heavier types of fuels because of their higher heat content.

#### X1.6 Viscosity

X1.6.1 For some engines it is advantageous to specify a minimum viscosity because of power loss due to injection pump and injector leakage. Maximum viscosity, on the other hand, is limited by considerations involved in engine design and size, and the characteristics of the injection system.

#### X1.7 Carbon Residue

X1.7.1 Carbon residue gives a measure of the carbon depositing tendencies of a fuel oil when heated in a bulb under

prescribed conditions. While not directly correlating with engine deposits, this property is considered an approximation.

#### X1.8 Sulfur

X1.8.1 The effect of sulfur content on engine wear and deposits appears to vary considerably in importance and depends largely on operating conditions. Fuel sulfur can affect emission control systems performance. To assure maximum availability of fuels, the permissible sulfur content should be specified as high as is practicable, consistent with maintenance considerations.

#### X1.9 Flash Point

X1.9.1 The flash point as specified is not directly related to engine performance. It is, however, of importance in connection with legal requirements and safety precautions involved in fuel handling and storage, and is normally specified to meet insurance and fire regulations.

#### X1.10 Cloud Point

X1.10.1 Cloud point is of importance in that it defines the temperature at which a cloud or haze of wax crystals appears in the oil under prescribed test conditions which generally relates to the temperature at which wax crystals begin to precipitate from the oil in use.

#### X1.11 Ash

X1.11.1 Ash-forming materials can be present in diesel fuel in two forms: (1) abrasive solids, and (2) soluble metallic soaps. Abrasive solids contribute to injector, fuel pump, piston and ring wear, and also to engine deposits. Soluble metallic soaps have little effect on wear but can contribute to engine deposits.

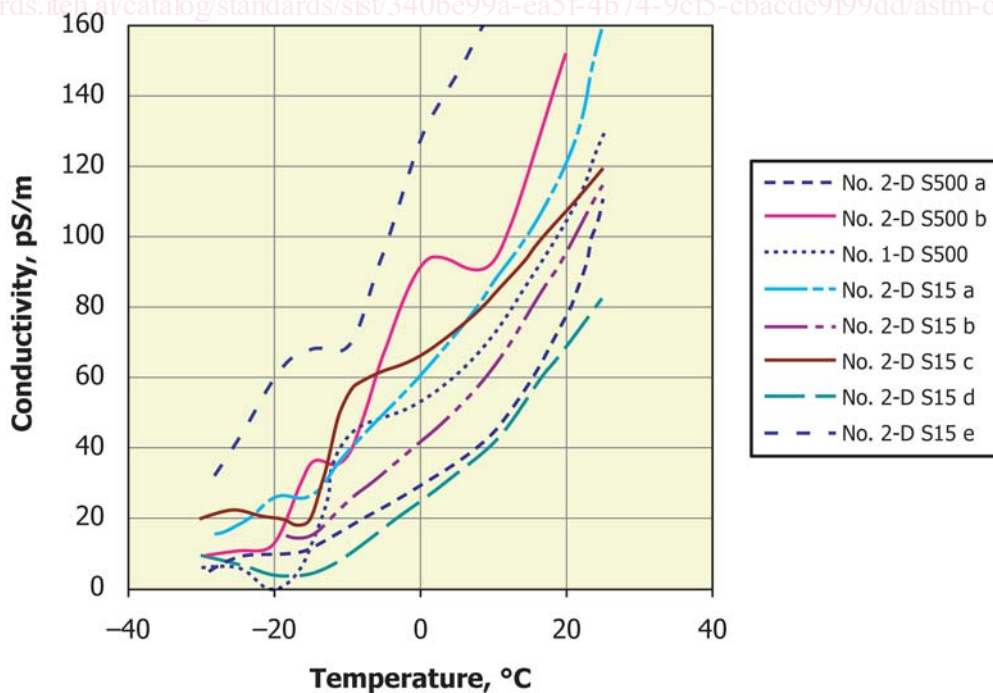


FIG. X1.1 Conductivity Varies with Temperature



## X1.12 Copper Strip Corrosion

X1.12.1 This test serves as a measure of possible difficulties with copper and brass or bronze parts of the fuel system.

## X1.13 Aromaticity

X1.13.1 This test is used as an indication of the aromatics content of diesel fuel. Aromatics content is specified to prevent an increase in the average aromatics content in Grades No. 1-D S15, No. 1-D S500, No. 2-D S15 and No. 2-D S500 fuels and is required by 40 CFR Part 80. Increases in aromatics content of fuels over current levels can have a negative impact on emissions.

## X1.14 Cetane Index

X1.14.1 Cetane Index is specified as a limitation on the amount of high aromatic components in Grades No. 1-D S15, No. 1-D S500, No. 2-D S15 and No. 2-D S500.

## X1.15 Other

X1.15.1 *Microbial Contamination*—Refer to Guide [D6469](#) for a discussion of this form of contamination.

## X1.16 Conductivity

X1.16.1 Electrical conductivity of fuels is an important consideration in the safe handling characteristics of any fuel. The risk associated with explosions due to static electrical discharge depends on the amount of hydrocarbon and oxygen in the vapor space and the energy and duration of a static discharge. There are many factors that can contribute to the high risk of explosion. For Ultra Low Sulfur Diesel (ULSD) fuels in particular, electrical conductivity can likely be very low before the addition of static dissipater additive (SDA). The intent of this requirement is to reduce the risk of electrostatic ignitions while filling tank trucks, barges, ship compartments, and rail cars, where flammable vapors from the past cargo can be present. Generally, it does not apply at the retail level where flammable vapors are usually absent. Those parties handling any fuel are advised to review Guide [D4865](#) as well as API RP 2003 and ISGOTT.<sup>8</sup>

X1.16.2 Conductivity is known to be highly dependent on temperature. The conductivity requirement in [Table 1](#) will decrease the risk, but it will not eliminate it.

X1.16.3 [Fig. X1.1](#) presents the response of conductivity to temperature for some typical diesel fuels.

X1.16.4 Due to the normal depletion of fuel conductivity additive during commingling, storage, distribution, or reduction of conductivity, or a combination thereof, at low temperatures, the fuel should be sufficiently treated, if needed with conductivity improver additives (also called static dissipater additives (SDA)) to ensure that the electrical conductivity requirement is met. The method of fuel distribution and

temperature at the point of delivery into mobile transport can require a substantially greater conductivity level than 25 pS/m at the point of additive treatment. If a static dissipater additive is needed to meet the minimum conductivity requirement, then initial additive treatment should allow for temperature, commingling, distribution, and adequate mixing effects to ensure the minimum conductivity is attained at the point of delivery into mobile transport. For more information on this subject, please refer to Guide [D4865](#) and Test Method [D2624](#).

X1.16.5 Fuel handlers should not be lulled into a false sense of security if the fuel meets or exceeds the minimum conductivity requirement. Improved fuel conductivity will accelerate the dissipation of electric charge but not eliminate the risks associated with handling combustible or flammable fuels. Fuel handlers should be aware of the increased static electricity production when diesel fuels are filtered through fine-mesh strainers and filters. Fuel handlers are encouraged to use industry-recommended safety practices to minimize the risk associated with handling fuel. One such safe operating practice recommends lower maximum flowrates upon initial loading procedures. Loading operations involving “switch-loading” of tanker trucks and other vessels pose increased risks.

X1.16.6 There is some concern over excessive additization of diesel fuel with static dissipater additives. A potential concern includes failure of exposed electrical equipment immersed in over-additized fuel. Another concern is potential interference with the properties of adjacent products in pipeline. Fuel handlers using static dissipater additives should employ effective controls to prevent over-additizing diesel fuel. Fuel handlers adding SDA or other additives should be aware of possible antagonistic or synergistic effects between additives used simultaneously in diesel fuel. Consultation with the appropriate SDA additive supplier or other experts, or both, as well as conducting appropriate additive interaction studies is recommended.

X1.16.7 For those fuel transporters that practice switch loading of fuels without container cleaning and purging after hauling high or intermediate fuels or solvents, risks are involved with that practice. Switch loading should be discouraged because of the difficulty in ensuring removal of all residual vapor-producing materials. Accidental electrostatic discharge ignition requires three elements:

(1) Presence of a flammable atmosphere from a previous volatile cargo,

(2) The ability of the low volatility material being loaded to accumulate an electrostatic charge because of low conductivity, and

(3) Operating conditions during loading, which encourage charge generation and reduce charge relaxation—especially the velocity of the loading stream. Switch loading also refers to the reverse situation when light product (for example, gasoline) is loaded into a container that previously held middle distillate fuel (for example, diesel), although this mode of switch loading is generally not considered a static ignition hazard (but may be a product contamination concern).

<sup>8</sup> ISGOTT (*International Safety Guide for Oil Tankers and Terminals*), 5th edition, Oil Companies International Marine Forum (OCIMF), London, England, [www.ocimf.com](http://www.ocimf.com).

## X2. SAMPLING, CONTAINERS AND SAMPLE HANDLING

### X2.1 Introduction

X2.1.1 This appendix provides guidance on methods and techniques for the proper sampling of diesel fuels. As diesel fuel specifications become more stringent and contaminants and impurities become more tightly controlled, even greater care needs to be taken in collecting and storing samples for quality assessment.

### X2.2 Sampling, Containers and Sample Handling Recommendations

X2.2.1 Appropriate manual method sampling procedures can be found in Practice **D4057** and automatic method sampling is covered in Practice **D4177**.

X2.2.2 The correct sample volume and appropriate container selection are also important decisions that can impact test results. Practice **D4306** for aviation fuel container selection

for tests sensitive to trace contamination can be useful. Practice **D5854** for procedures on container selection and sample mixing and handling is recommended. For cetane number determination protection from light is important. Collection and storage of diesel fuel samples in an opaque container, such as a dark brown glass bottle, metal can, or a minimally reactive plastic container to minimize exposure to UV emissions from sources such as sunlight or fluorescent lamps, is recommended. According to Paragraph 8.2 of Test Method **D6079**, “Because of sensitivity of lubricity measurements to trace materials, sample containers shall be only fully epoxy-lined metal, amber borosilicate glass, or polytetrafluoroethylene as specified in Practice **D4306**.”

X2.2.3 For volatility determination of a sample, Practice **D5842** for special precautions recommended for representative sampling and handling techniques may be appropriate.

## X3. STORAGE AND THERMAL STABILITY OF DIESEL FUELS

### X3.1 Scope

X3.1.1 This appendix provides guidance for consumers of diesel fuels who may wish to store quantities of fuels for extended periods or use the fuel in severe service or high temperature applications. Fuels containing residual components are excluded. Consistently successful long-term fuel storage or use in severe applications requires attention to fuel selection, storage conditions, handling and monitoring of properties during storage and prior to use.

X3.1.2 Normally produced fuels have adequate stability properties to withstand normal storage and use without the formation of troublesome amounts of insoluble degradation products. Fuels that are to be stored for prolonged periods or used in severe applications should be selected to avoid formation of sediments or gums, which can overload filters or plug injectors. Selection of these fuels should result from supplier-user discussions.

X3.1.3 These suggested practices are general in nature and should not be considered substitutes for any requirements imposed by the warranty of the equipment manufacturer or by federal, state, or local government regulations. Although they cannot replace knowledge of local conditions or good engineering and scientific judgment, these suggested practices do provide guidance in developing an individual fuel management system for the middle distillate fuel user. They include suggestions in the operation and maintenance of existing fuel storage and handling facilities and for identifying where, when, and how fuel quality should be monitored or selected for storage or severe use.

X3.1.4 Thermal stability test method, Test Method **D6468**, was established and successfully used for many years to evaluate Grade No. 2-D S5000 and S500 diesel fuels. Reflectance levels of 70 % at 90 min and 80 % at 180 min were

suggested by studies and experience for acceptable and premium performance. The National Conference on Weights and Measures (NCWM) adopted 80 % reflectance at 180 min as one requirement for the definition of premium diesel.

X3.1.5 Nearly all S15 fuel samples, when tested, result in reflectance levels greater than 90 %. Some experts were concerned about the formation of peroxides as the next category of stability concern for S15. If formed, peroxides could affect certain elastomers in equipment adversely.

X3.1.6 Despite high thermal stability as defined by Test Method **D6468** and a lack of incidents regarding peroxide formation, the stability of diesel fuel remains a concern because a number of elements have changed. A high reflectance from the Test Method **D6468** test may no longer be a clear indication of sufficiently high diesel stability.

X3.1.6.1 Diesel common-rail fuel injection systems with high pressure and high temperature were introduced.

X3.1.6.2 Fuels may be stressed more severely than before in production and usage.

X3.1.6.3 Finer filters are required in some applications to remove particulates from fuel.

X3.1.6.4 Fuel characteristics have changed and new fuel blends, such as with biodiesel, were introduced.

X3.1.7 Therefore, it has been shown that the existing test methods, suggested levels, and practices may not be compatible or adequate to describe diesel fuel stability and its effect in current and future diesel injection equipment. New test methods such as Rancimat (EN 15751) and PetroOxy (**D7545**) have been introduced and are used, if appropriate for the fuel type.

### X3.2 Definitions

X3.2.1 *bulk fuel, n*—fuel in a vessel exceeding 400 L.