



Designation: **C968—12 C968 – 19**

# Standard Test Methods for Analysis of Sintered Gadolinium Oxide-Uranium Dioxide Pellets<sup>1</sup>

This standard is issued under the fixed designation C968; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

## 1. Scope

1.1 These test methods cover procedures for the analysis of sintered gadolinium oxide-uranium dioxide pellets to determine compliance with specifications.

1.2 The analytical procedures appear in the following order:

	Section
Carbon (Total) by Direct Combustion—Thermal Conductivity Method	2
<b>C1408</b> Test Method for Carbon (Total) in Uranium Oxide Powders and Pellets By Direct Combustion-Infrared Detection Method	3
Chlorine and Fluorine by Pyrohydrolysis Ion-Selective Electrode Method	4
<b>C1502</b> Test Method for Determination of Total Chlorine and Fluorine in Uranium Dioxide and Gadolinium Oxide	3
Gadolinia Content by Energy-Dispersive X-Ray Spectrometry	4
<del><b>C1456</b> Test Method for Determination of Uranium or Gadolinium, or Both, in Gadolinium Oxide-Uranium Oxide Pellets or by X-Ray Fluorescence (XRF)</del>	<del>3</del>
<b>C1456</b> Test Method for Determination of Uranium or Gadolinium (or both) in Gadolinium Oxide-Uranium Oxide Pellets or by X-Ray Fluorescence (XRF)	3
Hydrogen by Inert Gas Fusion	4
<b>C1457</b> Test Method for Determination of Total Hydrogen Content of Uranium Oxide Powders and Pellets by Carrier Gas Extraction	3
Isotopic Uranium Composition by Multiple-Filament Surface-Ionization Mass Spectrometric Method	2
<del><b>C1413</b> Test Method for Isotopic Analysis of Hydrolyzed Uranium Hexafluoride And Uranyl Nitrate Solutions By Thermal Ionization Mass Spectrometry</del>	<del>3</del>
<b>C1413</b> Test Method for Isotopic Analysis of Hydrolyzed Uranium Hexafluoride And Uranyl Nitrate Solutions By Thermal Ionization Mass Spectrometry	3
<b>C1347</b> Practice for Preparation and Dissolution of Uranium Materials for Analysis	3
Nitrogen by Distillation—Nessler Reagent (Photometric) Method	6 to 16
Nitrogen by Distillation—Nessler Reagent (Photometric) Method	7 to 17
Oxygen-to-Metal Ratio of Sintered Gadolinium Oxide-Uranium Dioxide Pellets	4
<del><b>C1430</b> Test Method for Determination of Uranium, Oxygen to Uranium, and Oxygen to Metal (O/M) in Sintered Uranium Dioxide and Gadolinia-Uranium Dioxide Pellets by Atmospheric Equilibration</del>	<del>3</del>
<b>C1430</b> Test Method for Determination of Uranium, Oxygen to Uranium (O/U), and Oxygen to Metal (O/M) in Sintered Uranium Dioxide and Gadolinia-Uranium Dioxide Pellets by Atmospheric Equilibration	3
Spectrochemical Determination of Trace Impurity Elements	4

<sup>1</sup> These test methods are under the jurisdiction of ASTM C26 on Nuclear Fuel Cycle and are the direct responsibility of C26.05 on Methods of Test. Current edition approved Jan. 1, 2012/Sept. 1, 2019. Published February 2012/September 2019. Originally approved in 1981. Last previous edition approved in 2006/2012 as C968—06/C968 – 12. DOI: 10.1520/C0968-12.10.1520/C0968-19.

<sup>2</sup> Discontinued 1999. See C968 – 94.

<sup>3</sup> For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

<sup>4</sup> Discontinued 2005. See C968 – 99.

<b>C1517</b> Test Method for Determination of Metallic Impurities in Uranium Metal or Compounds by DC-Arc Emission Spectroscopy	Section 3
Total Gas by Hot Vacuum Extraction	2
<del>Ceramographic Determination of Free Gd<sub>2</sub>O<sub>3</sub> and Free UO<sub>2</sub> to Estimate the Homogeneity of (U,Gd)O<sub>2</sub> Pellets</del>	<del>17 to 24</del>
<del>Ceramographic Determination of Free Gd<sub>2</sub>O<sub>3</sub> and Free UO<sub>2</sub> to Estimate the Homogeneity of (U,Gd)O<sub>2</sub> Pellets</del>	<del>18 to 25</del>
<del>Ceramographic Determination of Average Grain Size by Linear Intercept after Chemical Etching</del>	<del>25 to 32</del>
<del>Ceramographic Determination of Average Grain Size by Linear Intercept after Chemical Etching</del>	<del>26 to 33</del>

1.3 The values stated in SI units are to be regarded as the standard.

1.4 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, safety, health, and healthenvironmental practices and determine the applicability of regulatory limitations prior to use.*

1.5 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

## 2. Referenced Documents

### 2.1 ASTM Standards:<sup>3</sup>

[C859 Terminology Relating to Nuclear Materials](#)

[C922 Specification for Sintered Gadolinium Oxide-Uranium Dioxide Pellets](#)

[C1347 Practice for Preparation and Dissolution of Uranium Materials for Analysis](#)

[C1408 Test Method for Carbon \(Total\) in Uranium Oxide Powders and Pellets By Direct Combustion-Infrared Detection Method](#)

[C1413 Test Method for Isotopic Analysis of Hydrolyzed Uranium Hexafluoride and Uranyl Nitrate Solutions by Thermal Ionization Mass Spectrometry](#)

[C1430 Test Method for Determination of Uranium, Oxygen to Uranium \(O/U\), and Oxygen to Metal \(O/M\) in Sintered Uranium Dioxide and Gadolinia-Uranium Dioxide Pellets by Atmospheric Equilibration](#)

[C1456 Test Method for Determination of Uranium or Gadolinium \(or both\) in Gadolinium Oxide-Uranium Oxide Pellets or by X-Ray Fluorescence \(XRF\)](#)

[C1457 Test Method for Determination of Total Hydrogen Content of Uranium Oxide Powders and Pellets by Carrier Gas Extraction](#)

[C1502 Test Method for Determination of Total Chlorine and Fluorine in Uranium Dioxide and Gadolinium Oxide](#)

[C1517 Test Method for Determination of Metallic Impurities in Uranium Metal or Compounds by DC-Arc Emission Spectroscopy](#)

[D1193 Specification for Reagent Water](#)

[E112 Test Methods for Determining Average Grain Size](#)

[E146 Methods of Chemical Analysis of Zirconium and Zirconium Alloys \(Silicon, Hydrogen, and Copper\) \(Withdrawn 1989\)<sup>5</sup>](#)

## 3. Terminology

3.1 For definitions of terms used in this test method but not defined herein, refer to Terminology [C859](#).

## 4. Significance and Use

4.1 The test methods in this method are designed to show whether a given material is in accordance with Specification [C922](#).

## 5. Reagents

5.1 *Purity of Reagents*—Reagent grade chemicals shall be used in all tests. Unless otherwise indicated, it is intended that all reagents shall conform to the specifications of the committee on Analytical Reagent of the American Chemical Society, where such specifications are available.<sup>6</sup> Other grades may be used, provided it is first ascertained that the reagent is of sufficiently high purity to permit its use without lessening the accuracy of the determination.

5.2 *Purity of Water*—Unless otherwise indicated, references to water shall be understood to mean reagent water conforming to Type IV of Specification [D1193](#).

<sup>5</sup> The last approved version of this historical standard is referenced on [www.astm.org](http://www.astm.org).

<sup>6</sup> *Reagent Chemicals, American Chemical Society Specifications*, American Chemical Society, Washington, DC. For suggestions on the testing of reagents not listed by the American Chemical Society, see *Analar Standards for Laboratory Chemicals*, BDH Ltd., Poole, Dorset, U.K., and the *United States Pharmacopeia and National Formulary*, U.S. Pharmacopeial Convention, Inc. (USPC), Rockville, MD.

## 6. Safety Precautions

6.1 Proper precautions should be taken to prevent inhalation or ingestion of gadolinium oxide or uranium dioxide dust during grinding or handling operations.

### CARBON (TOTAL) BY DIRECT COMBUSTION—THERMAL CONDUCTIVITY METHOD

This Test Method was discontinued in January 1999 and replaced by Test Method **C1408**

### CHLORINE AND FLUORINE BY PYROHYDROLYSIS ION-SELECTIVE ELECTRODE METHOD

This Test Method was discontinued in March 2005 and replaced by Test Method **C1502**

### GADOLINIA CONTENT BY ENERGY-DISPERSIVE X-RAY SPECTROMETRY

This Test Method was discontinued in March 2005 and replaced by Test Method **C1456**

### HYDROGEN BY INERT GAS FUSION

This Test Method was discontinued in March 2005 and replaced by Test Method **C1457**

### ISOTOPIC URANIUM COMPOSITION BY MULTIPLE-FILAMENT SURFACE-IONIZATION MASS SPECTROMETRIC METHOD

This Test Method was discontinued in January 1999 and replaced with **C1413**

Samples can be dissolved using the appropriate dissolution techniques described in Practice **C1347**

### NITROGEN BY DISTILLATION—NESSLER REAGENT (PHOTOMETRIC) METHOD

## 6. Scope

6.1 This test method describes the determination of nitrogen in gadolinium oxide-uranium dioxide pellets ( $Gd_2O_3/UO_2$ ). With a 2 to 5-g sample, concentrations from 5 to 100  $\mu g$  of nitrogen are determined without interference.

## 7. Scope

7.1 This test method describes the determination of nitrogen in gadolinium oxide-uranium dioxide pellets ( $Gd_2O_3/UO_2$ ). With a 2 to 5-g sample, concentrations from 5 to 100  $\mu g$  of nitrogen are determined without interference.

## 8. Summary of Test Method

8.1 Pellet samples of gadolinium oxide-uranium dioxide are crushed, then dissolved in phosphoric acid. Hydrochloric acid with hydrogen peroxide can also be used. The resulting solution is made alkaline with sodium hydroxide, and the nitrogen is separated as ammonia by steam distillation (see Method **E146**). Nessler reagent is added to the distillate to form the yellow ammonium complex, and the absorbance of the solution is measured at approximately 430 nm, using a cell depth of 2 cm (**1, 2**).<sup>7</sup>

NOTE 1—This procedure has been written for a cell having a 2-cm light path. The range of the method can be extended by suitably varying sample mass, aliquot size, amounts of reagents, and cell depth.

## 9. Interferences

9.1 There are no known interfering elements.

## 10. Apparatus

10.1 *Nitrogen Distillation Apparatus*, with 100-mL flask, **Fig. 1**; micro-Kjeldahl apparatus.

10.2 *Photometer*—A filter photometer with a narrow-band filter; or a spectrophotometer equipped with 2-cm cells.

10.3 *Heater*, 750-W, electric, full-control.

## 11. Reagents and Materials

11.1 *Nessler Reagent*—Dissolve 50 g of potassium iodide (KI) in a minimum of cold water (approximately 35 mL). Add a saturated solution of mercuric chloride ( $HgCl_2$ ) slowly until the first slight precipitate of red mercuric iodide persists. Add 400 mL of potassium or sodium hydroxide solution (505 g of KOH or 360 g of NaOH/L). Dilute the solution to 1 L with ammonia-free water, mix, and allow the solution to stand overnight. Decant the supernatant liquid and store it in a brown bottle. This reagent is stable indefinitely.

11.2 *Ammonium Chloride* ( $NH_4Cl$ )—Dry the ammonium chloride at 110 to 120°C for 2 h.

11.3 *Nitrogen Reference Solution* (1 mL = 10  $\mu g$  N)—Dissolve 3.819 g of dried  $NH_4Cl$  in water and dilute the solution to 1 L. Transfer 10 mL of this solution to a 1-L volumetric flask and dilute it to volume with water.

<sup>7</sup> The boldface numbers in parentheses refer to the list of references at the end of this standard.

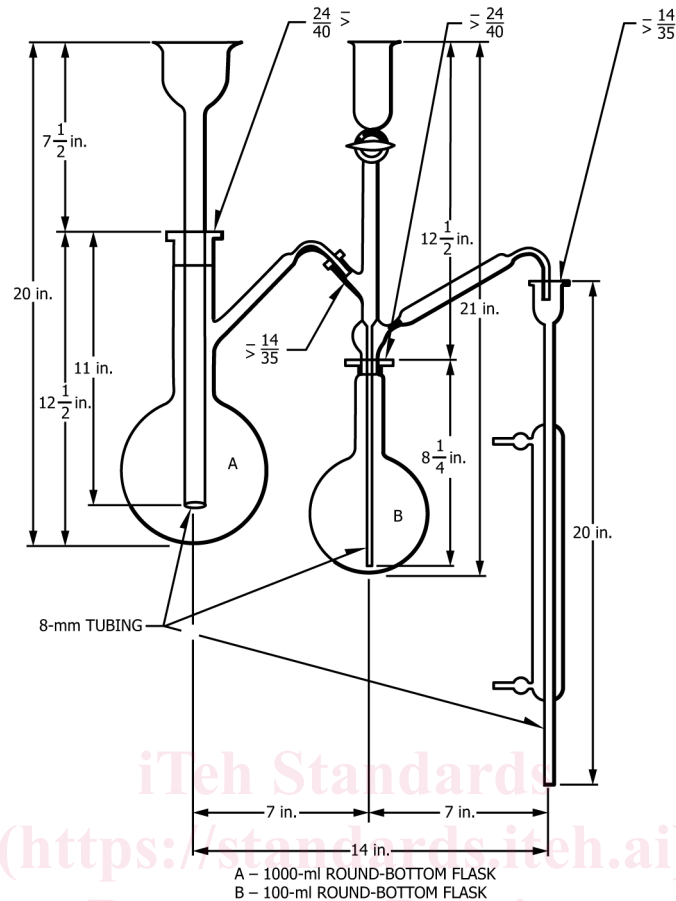


FIG. 1 Micro-Kjeldahl Apparatus

11.4 *Hydrochloric Acid* (6 N)—Dilute 6 volumes of concentrated hydrochloric acid (HCl) to 12 volumes.

11.5 *Hydrogen Peroxide* (30 %).

## 12. Precautions

12.1 The use of ammonia or other volatile nitrogenous compounds in the vicinity of the experiment can lead to serious errors. To ensure freedom from contamination, take the following precautionary measures:

12.1.1 Steam clean all glassware immediately prior to use.

12.1.2 Use ammonia-free water in all cases.

## 13. Purity of Water

13.1 Unless otherwise indicated, all references to water in this method shall be understood to mean ammonia-free water, prepared as follows: Pass distilled water or other water of equivalent purity through a mixed-bed resin demineralizer. Prepare all solutions in an ammonia-free atmosphere and store them in tightly stoppered chemical-resistant glass bottles. Boil all rubber stoppers used for 30 min in sodium hydroxide solution (100 g NaOH/L) and rinse them with ammonia-free water.

## 14. Preparation of Calibration Curve

14.1 *Calibration Solutions*—Pipet 5, 10, 25, 50, 100, and 150  $\mu\text{g}$  of the reference nitrogen solution (1 mL = 10  $\mu\text{g}$  N) into 50-mL volumetric flasks containing 25 mL of water. Pipet 1.0 mL of Nessler reagent into each flask and dilute to the mark with water. Stopper the flask and mix well.

14.2 *Reference Solution*—Pipet 1.0 mL of Nessler reagent into a small volume of water in a 50-mL volumetric flask. Dilute to volume with water. Stopper and mix well.

14.3 *Photometry*—Transfer a suitable portion of water to a 2-cm absorption cell and adjust the photometer to the initial setting, using a light band centered at approximately 430 nm. While maintaining this photometer adjustment, take the photometric readings of the reference solution and the calibration solutions.