

# INTERNATIONAL STANDARD

Industrial communication networks – Fieldbus specifications –  
Part 3-2: Data-link layer service definition – Type 2 elements

[IEC 61158-3-2:2023](https://standards.iteh.ai/catalog/standards/sist/3c089732-95dd-490e-89a4-58d984953d53/iec-61158-3-2-2023)

<https://standards.iteh.ai/catalog/standards/sist/3c089732-95dd-490e-89a4-58d984953d53/iec-61158-3-2-2023>



**THIS PUBLICATION IS COPYRIGHT PROTECTED**  
**Copyright © 2023 IEC, Geneva, Switzerland**

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

**About the IEC**

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

**About IEC publications**

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

**IEC publications search - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)**

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

**IEC Products & Services Portal - [products.iec.ch](http://products.iec.ch)**

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

**IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)**

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

**Electropedia - [www.electropedia.org](http://www.electropedia.org)**

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

**IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)**

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [sales@iec.ch](mailto:sales@iec.ch).

[IEC 61158-3-2:2023](https://standards.iec.ch/catalog/standards/sist/3c089732-95dd-490e-89a4-58d984953d53/iec-61158-3-2-2023)

---

<https://standards.iec.ch/catalog/standards/sist/3c089732-95dd-490e-89a4-58d984953d53/iec-61158-3-2-2023>



IEC 61158-3-2

Edition 3.0 2023-03

# INTERNATIONAL STANDARD

---

**Industrial communication networks – Fieldbus specifications –  
Part 3-2: Data-link layer service definition – Type 2 elements**

[IEC 61158-3-2:2023](https://standards.iteh.ai/catalog/standards/sist/3c089732-95dd-490e-89a4-58d984953d53/iec-61158-3-2-2023)

<https://standards.iteh.ai/catalog/standards/sist/3c089732-95dd-490e-89a4-58d984953d53/iec-61158-3-2-2023>

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

---

ICS 25.040.40; 35.100.20; 35.110

ISBN 978-2-8322-6558-1

**Warning! Make sure that you obtained this publication from an authorized distributor.**

## CONTENTS

FOREWORD.....	6
INTRODUCTION.....	8
1 Scope.....	9
1.1 General.....	9
1.2 Specifications .....	9
1.3 Conformance .....	9
2 Normative references .....	10
3 Terms, definitions, symbols, abbreviated terms and conventions .....	10
3.1 Reference model terms and definitions .....	10
3.2 Service convention terms and definitions .....	12
3.3 Common data-link service terms and definitions .....	12
3.4 Additional Type 2 data-link specific definitions .....	14
3.5 Common symbols and abbreviations .....	16
3.6 Additional Type 2 symbols and abbreviations.....	17
3.7 Common conventions.....	17
4 Connection-mode and connectionless-mode data-link service .....	18
4.1 Overview.....	18
4.1.1 Data transfer services.....	18
4.1.2 DL-management services .....	22
4.1.3 Timing services .....	22
4.2 Facilities of the data-link service .....	22
4.3 Model of the data-link service .....	23
4.3.1 General .....	23
4.3.2 DLS-instance identification .....	23
4.3.3 Model of abstract queue concepts .....	23
4.3.4 QoS features .....	24
4.3.5 DLS-TxStatus .....	25
4.3.6 Receive queues .....	25
4.4 Sequence of primitives.....	25
4.4.1 Constraints on sequence of primitives .....	25
4.4.2 Relation of primitives at DLSAPs .....	26
4.4.3 Sequence of primitives at one DLSAP.....	27
4.5 Connection-mode data transfer .....	27
4.5.1 General .....	27
4.5.2 Function .....	27
4.5.3 Types of primitives and parameters .....	27
4.5.4 Sequence of primitives .....	29
4.6 Connectionless-mode data transfer.....	29
4.6.1 General .....	29
4.6.2 Function .....	29
4.6.3 Types of primitives and parameters .....	30
4.6.4 Sequence of primitives .....	32
4.7 Queue maintenance.....	32
4.7.1 Function .....	32
4.7.2 Types of primitives and parameters .....	32
4.7.3 Request primitive.....	33
4.7.4 Confirmation primitive.....	33

4.7.5	Sequence of primitives .....	33
4.8	Tag filter .....	34
4.8.1	Function .....	34
4.8.2	Types of primitives and parameters .....	34
4.8.3	Sequence of primitives .....	35
5	DL-management services .....	35
5.1	Sequence of primitives .....	35
5.2	Link synchronization .....	36
5.2.1	Function .....	36
5.2.2	Types of primitives and parameters .....	36
5.2.3	Sequence of primitives .....	37
5.3	Synchronized parameter change .....	37
5.3.1	Function .....	37
5.3.2	Types of primitives and parameters .....	37
5.3.3	Sequence of primitives .....	39
5.4	Event reports .....	40
5.4.1	Function .....	40
5.4.2	Types of primitives and parameters .....	40
5.4.3	Sequence of primitives .....	41
5.5	Bad FCS .....	41
5.5.1	Function .....	41
5.5.2	Types of primitives and parameters .....	41
5.5.3	Sequence of primitives .....	41
5.6	Current moderator .....	42
5.6.1	Function .....	42
5.6.2	Types of primitives and parameters .....	42
5.6.3	Sequence of primitives .....	42
5.7	Enable moderator .....	42
5.7.1	Function .....	42
5.7.2	Types of primitives and parameters .....	42
5.7.3	Sequence of primitives .....	43
5.8	Power-up and online .....	43
5.8.1	Function .....	43
5.8.2	Types of primitives and parameters .....	43
5.8.3	Sequence of primitives .....	44
5.9	Listen only .....	44
5.9.1	Function .....	44
5.9.2	Types of primitives and parameters .....	45
5.9.3	Sequence of primitives .....	45
5.10	Time distribution .....	45
5.10.1	Function .....	45
5.10.2	Types of primitives and parameters .....	45
	Bibliography .....	48
	Figure 1 – Relationships of DLSAPs, DLSAP-addresses and group DL-addresses .....	13
	Figure 2 – NUT structure .....	19
	Figure 3 – Medium access during scheduled time .....	20
	Figure 4 – Medium access during unscheduled time .....	21

Figure 5 – Queue model for the peer and multipoint DLS, DLSAPs and their DLCEPs .....	22
Figure 6 – Queue model of a multipoint DLS between a sending DLS-user and one or more receiving DLS-users .....	24
Figure 7 – DLS primitive time-sequence diagram .....	26
Figure 8 – State transition diagram for sequences of DLS primitives at one DLSAP .....	27
Figure 9 – Sequence of primitives for a successful connection-mode transfer .....	29
Figure 10 – Sequence of primitives for an unsuccessful connection-mode transfer .....	29
Figure 11 – Sequence of primitives for a successful connectionless-mode transfer .....	32
Figure 12 – Sequence of primitives for an unsuccessful connectionless-mode transfer .....	32
Figure 13 – Sequence of primitives for a queue maintenance request .....	34
Figure 14 – Sequence of primitives for a tag filter request .....	35
Figure 15 – Sequence of primitives for a local link synchronization .....	37
Figure 16 – Sequence of primitives for a DLM-get/set parameters request .....	39
Figure 17 – Sequence of primitives for a DLM-tMinus change request .....	39
Figure 18 – Sequence of primitives for a DLM-event indication .....	41
Figure 19 – Sequence of primitives for a DLM-bad-FCS indication .....	42
Figure 20 – Sequence of primitives for a DLM-current-moderator indication .....	42
Figure 21 – Sequence of primitives for a DLM-enable-moderator request .....	43
Figure 22 – Sequence of primitives for a DLM-power-up indication .....	44
Figure 23 – Sequence of primitives for a DLM-online request .....	44
Figure 24 – Sequence of primitives for a DLM-listen-only request .....	45
IEC 61158-3-2:2023	
Table 1 – Summary of connection-mode and connectionless-mode primitives and parameters .....	26
Table 2 – DL-connection-mode transfer primitives and parameters .....	28
Table 3 – DL-connectionless-mode transfer primitives and parameters .....	30
Table 4 – Fixed tag services available to the DLS-user .....	31
Table 5 – DL-queue maintenance primitives and parameters (single flush) .....	33
Table 6 – DL-queue maintenance primitives and parameters (flush by QoS) .....	33
Table 7 – DL-connectionless-mode tag filter primitives and parameters .....	34
Table 8 – Summary of DL-management primitives and parameters .....	36
Table 9 – Link synchronization primitives and parameters .....	37
Table 10 – Synchronized parameter change primitives and parameters (set configuration) .....	38
Table 11 – Synchronized parameter change primitives and parameters (get configuration) .....	38
Table 12 – Synchronized parameter change primitives and parameters (start countdown) .....	38
Table 13 – Synchronized parameter change primitives and parameters (tMinus) .....	38
Table 14 – DLMS-configuration-data .....	39
Table 15 – Event report primitives and parameters .....	40
Table 16 – DLMS events being reported .....	40
Table 17 – Bad FCS primitives and parameters .....	41
Table 18 – Current moderator primitives and parameters .....	42
Table 19 – Enable moderator primitives and parameters .....	43

Table 20 – Power-up primitives and parameters.....	43
Table 21 – Online primitives and parameters .....	44
Table 22 – Listen-only primitives and parameters .....	45
Table 23 – DLMS time and time quality parameters .....	46
Table 24 – Time distribution source quality .....	46

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[IEC 61158-3-2:2023](https://standards.iteh.ai/catalog/standards/sist/3c089732-95dd-490e-89a4-58d984953d53/iec-61158-3-2-2023)

<https://standards.iteh.ai/catalog/standards/sist/3c089732-95dd-490e-89a4-58d984953d53/iec-61158-3-2-2023>

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**INDUSTRIAL COMMUNICATION NETWORKS –  
FIELDBUS SPECIFICATIONS –****Part 3-2: Data-link layer service definition –  
Type 2 elements**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

Attention is drawn to the fact that the use of the associated protocol type is restricted by its intellectual-property-right holders. In all cases, the commitment to limited release of intellectual-property-rights made by the holders of those rights permits a layer protocol type to be used with other layer protocols of the same type, or in other type combinations explicitly authorized by its intellectual-property-right holders.

NOTE Combinations of protocol types are specified in the IEC 61784-1 series and the IEC 61784-2 series.

IEC 61158-3-2 has been prepared by subcommittee 65C: Industrial networks, of IEC technical committee 65: Industrial-process measurement, control and automation. It is an International Standard.

This third edition cancels and replaces the second edition published in 2014 and Amendment 1:2019. This edition constitutes a technical revision.



This edition includes the following significant technical changes with respect to the previous edition:

- a) update of normative and bibliographic references;
- b) use of more inclusive terminology ("master" replaced by "active" or "supervisor");
- c) miscellaneous editorial corrections.

The text of this International Standard is based on the following documents:

Draft	Report on voting
65C/1201/FDIS	65C/1242/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at [www.iec.ch/members\\_experts/refdocs](http://www.iec.ch/members_experts/refdocs). The main document types developed by IEC are described in greater detail at [www.iec.ch/publications](http://www.iec.ch/publications).

A list of all the parts of the IEC 61158 series, under the general title *Industrial communication networks – Fieldbus specifications*, can be found on the IEC web site.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under [webstore.iec.ch](http://webstore.iec.ch) in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

## INTRODUCTION

This part of IEC 61158 is one of a series produced to facilitate the interconnection of automation system components. It is related to other standards in the set as defined by the "three-layer" fieldbus reference model described in IEC 61158-1.

Throughout the set of fieldbus standards, the term "service" refers to the abstract capability provided by one layer of the OSI Basic Reference Model to the layer immediately above. Thus, the data-link layer service defined in this document is a conceptual architectural service, independent of administrative and implementation divisions.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[IEC 61158-3-2:2023](https://standards.iteh.ai/catalog/standards/sist/3c089732-95dd-490e-89a4-58d984953d53/iec-61158-3-2-2023)

<https://standards.iteh.ai/catalog/standards/sist/3c089732-95dd-490e-89a4-58d984953d53/iec-61158-3-2-2023>

# INDUSTRIAL COMMUNICATION NETWORKS – FIELDBUS SPECIFICATIONS –

## Part 3-2: Data-link layer service definition – Type 2 elements

### 1 Scope

#### 1.1 General

This part of IEC 61158 provides common elements for basic time-critical messaging communications between devices in an automation environment. The term "time-critical" is used to represent the presence of a time-window, within which one or more specified actions are required to be completed with some defined level of certainty. Failure to complete specified actions within the time window risks failure of the applications requesting the actions, with attendant risk to equipment, plant and possibly human life.

This document defines in an abstract way the externally visible service provided by the Type 2 fieldbus data-link layer in terms of:

- the primitive actions and events of the service;
- the parameters associated with each primitive action and event, and the form which they take; and
- the interrelationship between these actions and events, and their valid sequences.

The purpose of this document is to define the services provided to:

- the Type 2 fieldbus application layer at the boundary between the application and data-link layers of the fieldbus reference model;
- systems management at the boundary between the data-link layer and systems management of the fieldbus reference model.

Type 2 DL-service provides both a connected and a connectionless subset of those services specified in ISO/IEC 8886.

#### 1.2 Specifications

The principal objective of this document is to specify the characteristics of conceptual data-link layer services suitable for time-critical communications and thus supplement the OSI Basic Reference Model in guiding the development of data-link protocols for time-critical communications. A secondary objective is to provide migration paths from previously existing industrial communications protocols.

This document can be used as the basis for formal DL-Programming-Interfaces. Nevertheless, it is not a formal programming interface, and any such interface will need to address implementation issues not covered by this specification, including:

- the sizes and octet ordering of various multi-octet service parameters;
- the correlation of paired request and confirm, or indication and response, primitives.

#### 1.3 Conformance

This document does not specify individual implementations or products, nor does it constrain the implementations of data-link entities within industrial automation systems.

There is no conformance of equipment to this data-link layer service definition standard. Instead, conformance is achieved through implementation of the corresponding data-link protocol that fulfills the Type 2 data-link layer services defined in this document.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE All parts of the IEC 61158 series, as well as the IEC 61784-1 series and the IEC 61784-2 series are maintained simultaneously. Cross-references to these documents within the text therefore refer to the editions as dated in this list of normative references.

IEC 61158-4-2:2023, *Industrial communication networks – Fieldbus specifications – Part 4-2: Data-link layer protocol specification – Type 2 elements*

ISO/IEC 7498-1, *Information technology – Open Systems Interconnection – Basic Reference Model: The Basic Model*

ISO/IEC 7498-3, *Information technology – Open Systems Interconnection – Basic Reference Model: Naming and addressing*

ISO/IEC 8886, *Information technology – Open Systems Interconnection – Data link service definition*

ISO/IEC 10731:1994, *Information technology – Open Systems Interconnection – Basic Reference Model – Conventions for the definition of OSI services*

<https://standards.iteh.ai/catalog/standards/sist/3c089732-95dd-490e-89a4-58d984953d53/iec-61158-3-2-2023>

## 3 Terms, definitions, symbols, abbreviated terms and conventions

For the purposes of this document, the following terms, definitions, symbols, abbreviated terms and conventions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

### 3.1 Reference model terms and definitions

This document is based in part on the concepts developed in ISO/IEC 7498-1 and ISO/IEC 7498-3, and makes use of the following terms defined therein:

3.1.1	<b>DL-address</b>	[ISO/IEC 7498-3]
3.1.2	<b>DL-address-mapping</b>	[ISO/IEC 7498-1]
3.1.3	<b>called-DL-address</b>	[ISO/IEC 7498-3]
3.1.4	<b>calling-DL-address</b>	[ISO/IEC 7498-3]
3.1.5	<b>centralized multi-end-point-connection</b>	[ISO/IEC 7498-1]
3.1.6	<b>DL-connection</b>	[ISO/IEC 7498-1]
3.1.7	<b>DL-connection-end-point</b>	[ISO/IEC 7498-1]
3.1.8	<b>DL-connection-end-point-identifier</b>	[ISO/IEC 7498-1]
3.1.9	<b>DL-connection-mode transmission</b>	[ISO/IEC 7498-1]
3.1.10	<b>DL-connectionless-mode transmission</b>	[ISO/IEC 7498-1]
3.1.11	<b>correspondent (N)-entities</b> <b>correspondent DL-entities (N=2)</b> <b>correspondent Ph-entities (N=1)</b>	[ISO/IEC 7498-1]
3.1.12	<b>DL-duplex-transmission</b>	[ISO/IEC 7498-1]
3.1.13	<b>(N)-entity</b> <b>DL-entity (N=2)</b> <b>Ph-entity (N=1)</b>	[ISO/IEC 7498-1]
3.1.14	<b>DL-facility</b>	[ISO/IEC 7498-1]
3.1.15	<b>flow control</b>	[ISO/IEC 7498-1]
3.1.16	<b>(N)-layer</b> <b>DL-layer (N=2)</b> <b>Ph-layer (N=1)</b>	[ISO/IEC 7498-1]
3.1.17	<b>layer-management</b>	[ISO/IEC 7498-1]
3.1.18	<b>DL-local-view</b>	[ISO/IEC 7498-3]
3.1.19	<b>DL-name</b>	[ISO/IEC 7498-3]
3.1.20	<b>naming-(addressing)-domain</b>	[ISO/IEC 7498-3]
3.1.21	<b>peer-entities</b>	[ISO/IEC 7498-1]
3.1.22	<b>primitive name</b>	[ISO/IEC 7498-3]
3.1.23	<b>DL-protocol</b>	[ISO/IEC 7498-1]
3.1.24	<b>DL-protocol-connection-identifier</b>	[ISO/IEC 7498-1]
3.1.25	<b>DL-protocol-data-unit</b>	[ISO/IEC 7498-1]
3.1.26	<b>DL-relay</b>	[ISO/IEC 7498-1]
3.1.27	<b>reset</b>	[ISO/IEC 7498-1]
3.1.28	<b>responding-DL-address</b>	[ISO/IEC 7498-3]
3.1.29	<b>routing</b>	[ISO/IEC 7498-1]
3.1.30	<b>segmenting</b>	[ISO/IEC 7498-1]
3.1.31	<b>(N)-service</b> <b>DL-service (N=2)</b> <b>Ph-service (N=1)</b>	[ISO/IEC 7498-1]
3.1.32	<b>(N)-service-access-point</b> <b>DL-service-access-point (N=2)</b> <b>Ph-service-access-point (N=1)</b>	[ISO/IEC 7498-1]
3.1.33	<b>DL-service-access-point-address</b>	[ISO/IEC 7498-3]
3.1.34	<b>DL-service-connection-identifier</b>	[ISO/IEC 7498-1]
3.1.35	<b>DL-service-data-unit</b>	[ISO/IEC 7498-1]
3.1.36	<b>DL-simplex-transmission</b>	[ISO/IEC 7498-1]

<b>3.1.37 DL-subsystem</b>	[ISO/IEC 7498-1]
<b>3.1.38 systems-management</b>	[ISO/IEC 7498-1]
<b>3.1.39 DLS-user-data</b>	[ISO/IEC 7498-1]

### 3.2 Service convention terms and definitions

This document also makes use of the following terms defined in ISO/IEC 10731 as they apply to the data-link layer:

- 3.2.1 acceptor**
- 3.2.2 asymmetrical service**
- 3.2.3 confirm (primitive);  
requestor.deliver (primitive)**
- 3.2.4 deliver (primitive)**
- 3.2.5 DL-confirmed-facility**
- 3.2.6 DL-facility**
- 3.2.7 DL-local-view**
- 3.2.8 DL-mandatory-facility**
- 3.2.9 DL-non-confirmed-facility**
- 3.2.10 DL-provider-initiated-facility**
- 3.2.11 DL-provider-optional-facility**
- 3.2.12 DL-service-primitive;  
primitive**
- 3.2.13 DL-service-provider**
- 3.2.14 DL-service-user**
- 3.2.15 DLS-user-optional-facility**
- 3.2.16 indication (primitive);  
acceptor.deliver (primitive)**
- 3.2.17 multi-peer**
- 3.2.18 request (primitive);  
requestor.submit (primitive)**
- 3.2.19 requestor**
- 3.2.20 response (primitive);  
acceptor.submit (primitive)**
- 3.2.21 submit (primitive)**
- 3.2.22 symmetrical service**

### 3.3 Common data-link service terms and definitions

For the purposes of this document, the following terms and definitions apply.

NOTE Many definitions are common to more than one protocol Type; they are not necessarily used by all protocol Types.


### 3.3.1 DL-segment link local link

single DL-subnetwork in which any of the connected DLEs may communicate directly, without any intervening DL-relaying, whenever all of those DLEs that are participating in an instance of communication are simultaneously attentive to the DL-subnetwork during the period(s) of attempted communication

### 3.3.2 DLSAP

distinctive point at which DL-services are provided by a single DL-entity to a single higher-layer entity

Note 1 to entry: This definition, derived from ISO/IEC 7498-1, is repeated here to facilitate understanding of the critical distinction between DLSAPs and their DL-addresses (see Figure 1).

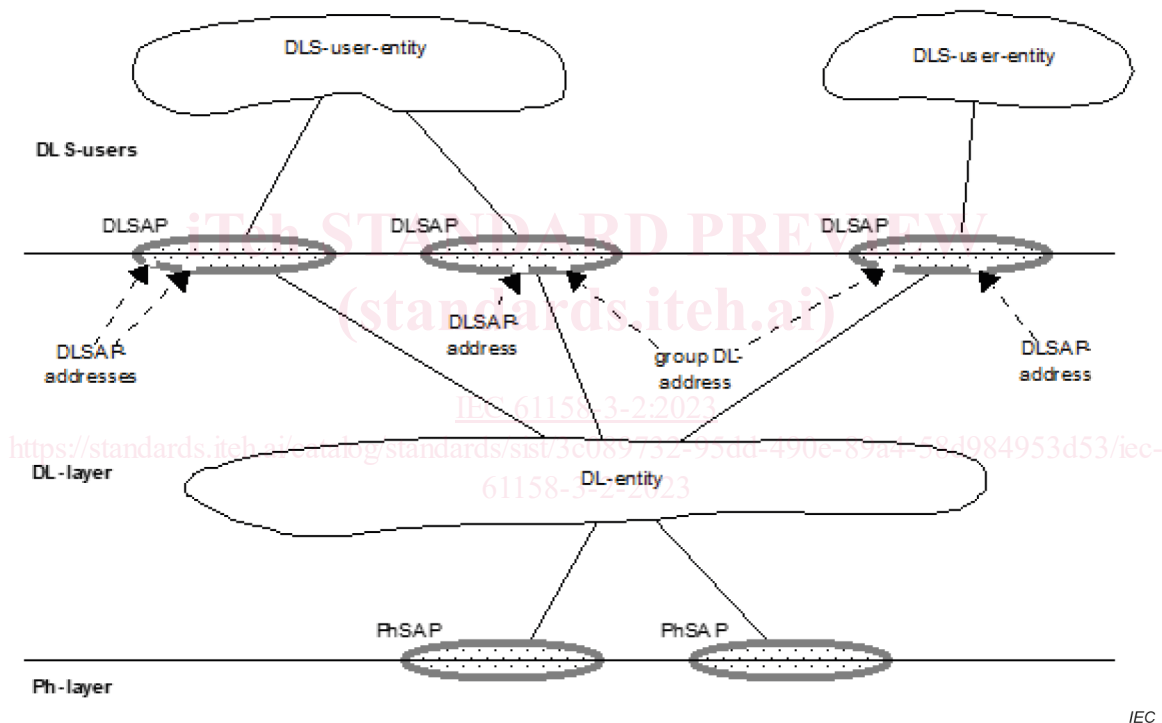

IEC

NOTE 1 DLSAPs and PhSAPs are depicted as ovals spanning the boundary between two adjacent layers.

NOTE 2 DL-addresses are depicted as designating small gaps (points of access) in the DLL portion of a DLSAP.

NOTE 3 A single DL-entity can have multiple DLSAP-addresses and group DL-addresses associated with a single DLSAP.

**Figure 1 – Relationships of DLSAPs, DLSAP-addresses and group DL-addresses**

### 3.3.3 DL(SAP)-address

either an individual DLSAP-address, designating a single DLSAP of a single DLS-user, or a group DL-address potentially designating multiple DLSAPs, each of a single DLS-user

Note 1 to entry: This terminology is chosen because ISO/IEC 7498-3 does not permit the use of the term DLSAP-address to designate more than a single DLSAP at a single DLS-user.

### 3.3.4 (individual) DLSAP-address

DL-address that designates only one DLSAP within the extended link