



Designation: F3218 – 19

Standard Practice for Documenting Environmental Conditions for Utilization with A-UGV Test Methods¹

This standard is issued under the fixed designation F3218; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 When conducting test methods, it is important to consider the role that the environmental conditions play in the Automatic through Autonomous – Unmanned Ground Vehicle (A-UGV) performance. Various A-UGVs are designed to be operated both indoors and outdoors under conditions specified by the manufacturer. Likewise, end users of the A-UGV will be operating these vehicles in a variety of environmental conditions. When conducting and replicating F45 test methods by vehicle manufacturers and users, it is important to specify and document the environmental conditions under which the A-UGV is to be tested as there will be variations in vehicle performance caused by the conditions, especially when comparing and replicating sets of test results. It is also important to consider changes in environmental conditions during the course of operations (for example, transitions between conditions). As such, environmental conditions specified in this practice are static, dynamic, or transitional, or combinations thereof; with the A-UGV stationary or in motion. This practice provides brief introduction to the following list of environmental conditions that can affect performance of the A-UGV: Lighting, External sensor emission, Temperature, Humidity, Electrical Interference, Air quality, Ground Surface, and Boundaries. This practice then breaks down each condition into sub-categories so that the user can document the various aspects associated with the category prior to A-UGV tests defined in ASTM F45 Test Methods (for example, F3244). It is recommended that salient environment conditions be documented when conducting F45 test methods.

1.2 The environmental conditions listed in 1.1 to be documented for A-UGV(s) being tested are described and parameterized in Section 4 and allow a basis for performance comparison in test methods. The approach is to divide the list of environmental conditions into sub-conditions that represent the various aspects of the major category (for example,

¹ This practice is under the jurisdiction of ASTM Committee F45 on Driverless Automatic Guided Industrial Vehicles and is the direct responsibility of Subcommittee F45.01 on Environmental Effects.

Current edition approved Sept. 1, 2019. Published October 2019. Originally approved in 2017. Last previous edition approved in 2017 as F3218 – 17. DOI: 10.1520/F3218-19.

sunlight within ambient lighting). Where necessary, this practice also provides guidelines (for example, lighting direction) to document environmental conditions in an existing environment.

1.3 The values stated in SI units are to be regarded as the standard. The values given in parentheses are not precise mathematical conversion to imperial units. They are close approximate equivalents for the purpose of specifying material dimensions or quantities that are readily available to avoid excessive fabrication costs of test apparatuses while maintaining repeatability and reproducibility of the test method results. These values given in parentheses are provided for information only and are not considered standard.

1.4 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.5 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 ASTM Standards:²

[E1155M Test Method for Determining \$F_F\$ Floor Flatness and \$F_L\$ Floor Levelness Numbers \(Metric\)](#)

[E1274 Test Method for Measuring Pavement Roughness Using a Profilograph](#)

[F3200 Terminology for Driverless Automatic Guided Industrial Vehicles](#)

[F3244 Test Method for Navigation: Defined Area](#)

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

2.2 Other Standards:

- ANSI/ITSDF B56.5 Safety Standard for Driverless, Automatic Guided Industrial Vehicles and Automated Functions of Manned Industrial Vehicles – section 8.11.2 describes Hazardous Zones³
- ANSI B101.3 Test Method for Measuring Wet DCOF of Common Hard-Surface Floor Materials – specifies use of a BOT-3000 drag-sled meter
- ISO 14644-1 Cleanrooms and Associated Controlled Environments – Part 1: Classification of Air Cleanliness by Particle Concentration⁴
- BS 667 Illuminance Meters – Requirements and Test Methods
- BS EN 12895 Electromagnetic Compatibility – Emissions and Immunity⁵
- MIL-STD-462 EMI Emissions and Susceptibility⁶
- ISO 15469 Spatial distribution of daylight – CIE standard general sky – defines a set of outdoor daylight conditions linking sunlight and skylight for theoretical and practical purposes
- IEC 61000-4-1 Electromagnetic Compatibility (EMC) – Part 4-1: Testing and Measurement Techniques – Overview of Immunity Tests⁷
- IEC 61000-6 Emission Standards for Industrial Environments⁷
- UL 3100 Outline Investigation for Automated Guided Vehicles (AGVs)⁸

3. Terminology

3.1 Generic terminology for this practice are referenced in Terminology F3200.

3.2 Definitions of Terms Specific to This Standard:

3.2.1 *between area, n*—the area of the apparatus that is between different environmental conditions in a transitional environment (see *transitional*).

3.2.2 *change time, n*—amount of time to change from one environmental condition to another (only applies to dynamic environments).

3.2.3 *dynamic, adj*—when the environment changes over time within the test apparatus during a test.

3.2.3.1 *Discussion*—The amount of time it takes for the environment to change is called change time (see *change time*).

3.2.4 *emitter, n*—external radiation sources that can affect the A-UGV performance, for example: multiple time-of-flight

³ Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036, <http://www.ansi.org>.

⁴ Available from International Organization for Standardization (ISO), ISO Central Secretariat, BIBC II, Chemin de Blandonnet 8, CP 401, 1214 Vernier, Geneva, Switzerland, <http://www.iso.org>.

⁵ Available from British Standards Institution (BSI), 389 Chiswick High Rd., London W4 4AL, U.K., <http://www.bsigroup.com>.

⁶ Available from U.S. Government Printing Office, Superintendent of Documents, 732 N. Capitol St., NW, Washington, DC 20401-0001, <http://www.access.gpo.gov>.

⁷ Available from International Electrotechnical Commission (IEC), 3, rue de Varembé, 1st Floor, P.O. Box 131, CH-1211, Geneva 20, Switzerland, <http://www.iec.ch>.

⁸ Available from Underwriters Laboratories (UL), 2600 N.W. Lake Rd., Camas, WA 98607-8542, <http://www.ul.com>.

cameras, fork-lift pedestrian lights, structured light sensor, light detection and ranging sensors (LIDAR).

3.2.5 *transition distance, n*—amount of distance to change from one environmental condition to another, that is, the length of the between area (see *between area*).

3.2.6 *transitional, adj*—when the environment significantly differs in different areas within the test apparatus.

3.2.6.1 *Discussion*—The area between the different environmental conditions is called the between area (see *between area*).

4. Significance and Use

4.1 This section provides a description of the environmental conditions listed in Section 1 and describes the sub-conditions within each condition. Examples provided for many of the conditions and sub-conditions are provided as guidance only. Each of the conditions described should be evaluated and documented as set forth in Sections 5, 6, and 7.

4.2 *Environmental Consistency: Static, Dynamic, Transitional:*

4.2.1 Static is when the environment is similar throughout the test apparatus. For example, there are minor fluctuations in temperature throughout the apparatus as shown in Fig. 1 and Fig. 2. Dynamic is when the environment significantly differs within the test apparatus. For example, when the temperature changes between repetitions as shown in Fig. 3. Transitional is when the environment significantly differs in different areas within the test apparatus as shown in Fig. 4. The intent here is to not give specific guidance, but to provide a high-level classification of a particular set of environmental conditions. If environment consistency is dynamic or transitional, or both, a report form (see Section 7) for each unique set of environmental conditions should be completed.

4.3 Lighting:

4.3.1 Various lighting conditions can potentially affect A-UGV optical sensor performance by affecting sensor and in turn, A-UGV responsiveness. Lighting sources can include ambient lighting as well as light emitters associated A-UGV operation. Two setups for lighting include direct or ambient

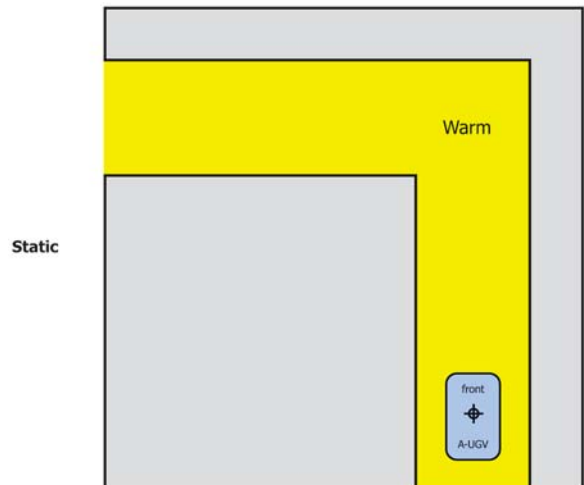


FIG. 1 Example of Static Environment using Temperature

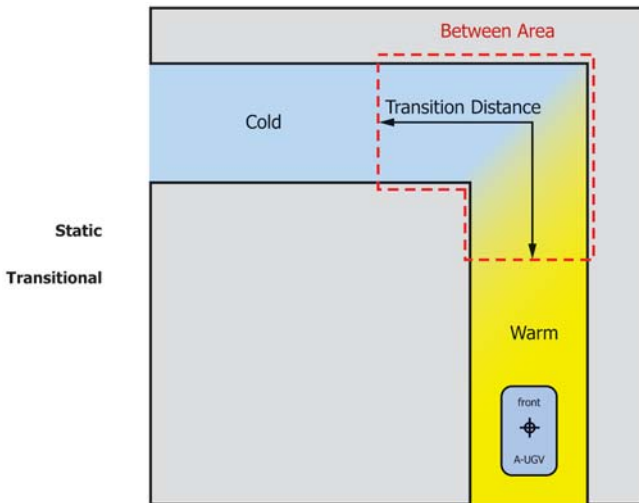


FIG. 2 Example of Static Environment using Temperature and Showing a Transition between Two Static Environments

source(s) applied to the A-UGV. Direct lighting can also include reflected light from a highly reflective surface and implies that the source is directed at the light-affected components of the A-UGV (for example, sensors). Indirect or ambient light includes lighting where the source is not directly applied to the light-affected components of the A-UGV. Light intensity is divided into five levels exemplified through dark, dim, typical indoor lighting, spotlight, and full sunlight.

4.3.2 Ambient Lighting Type:

4.3.2.1 Exposed bulb (for example, fluorescent, can lights),

4.3.2.2 Spotlight (for example, direct away from the A-UGV),

4.3.2.3 Sunlight (for example, the A-UGV is tested in bright sunlight),

4.3.2.4 Reflected (for example, bulb directed at the ceiling),

4.3.2.5 Filtered (for example, diffused light through translucent glass).

4.3.3 Directed Lighting Type:

4.3.3.1 Exposed bulb,

4.3.3.2 Spotlight,

4.3.3.3 Sunlight (for example, the A-UGV faces/navigates towards low sun position),

4.3.3.4 Reflected,

4.3.3.5 Filtered,

4.3.3.6 Laser,

4.3.3.7 Light from another vehicle.

4.3.4 Lighting Source Location—Document indirect and direct light source location and elevation with respect to the A-UGV (refer to Fig. 5).

4.3.5 Lighting Levels:

4.3.5.1 Level 1: 0 to 1 lux (for example, dark).

4.3.5.2 Level 2: 2 to 99 lux (for example, dim).

4.3.5.3 Level 3: 100 to 1000 lux (for example, office environment).

4.3.5.4 Level 4: 1001 to 9999 lux (for example, high intensity work light, spotlight).

4.3.5.5 Level 5: 10 000 lux and above (for example, full sunlight).

4.3.6 Spectrum—Identify primary color and peak wavelength.

4.3.7 Polarization—Identify the polarizing source and angle with respect to a known reference (for example, world coordinates).

4.3.8 If more specificity of measurement is required, the following documents and standards may be used: “Recommended Light Levels” from the National Optical Astronomy Observatory⁹ and ISO 15469.

4.4 External Emission:

4.4.1 When emitters are outside of the A-UGV (for example, from another A-UGV, the environment) that can potentially interfere with the A-UGV sensor system. External radiation sources can affect the A-UGV performance, for example: multiple time-of-flight cameras, fork-lift pedestrian lights, 3D structured light sensors, light detection and ranging sensors (LIDAR).

4.4.2 External Emitter Configuration:

4.4.2.1 Type of emitter(s).

4.4.2.2 Quantity of emitter(s).

4.4.3 External Emitter Source Location—Document emitter source location and elevation with respect to the A-UGV (refer to Fig. 5); add an external emitter symbol on the test method drawing in the appropriate location.

4.4.4 Spectrum—Identify primary color and peak wavelength.

4.5 Temperature:

4.5.1 Temperature variability and extremes can affect the A-UGV performance. Temperature ranges span from low to high extremes expressed in five levels. Temperature variations can affect onboard electronics, create condensation, cause hydraulic fluid viscosity, reduce battery life and recharge rate.

4.5.2 Temperature Levels (in °C):

4.5.2.1 Level 1: below 0°C to 0°C (for example, freezer).

4.5.2.2 Level 2: 0°C to 15°C (for example, perishable storage).

4.5.2.3 Level 3: 16°C to 26°C (for example, office, warehouse).

4.5.2.4 Level 4: 27°C to 49°C (for example, warehouse).

4.5.2.5 Level 5: above 49°C (for example, foundries, forges).

4.6 Humidity:

4.6.1 Humidity refers to the amount of water vapor contained in the air around the vehicle. High humidity combined with dew point temperature causes condensation that can short electronics and affect lenses and other A-UGV components. Greater than 60 % humidity causes a large increase in corrosion of metallic parts. Low humidity, on the other hand, will see a dramatic rise in static electricity and the need for adequate discharge.

⁹ “Recommended Light Levels”, National Optical Astronomy Observatory, <https://www.noao.edu/>, accessed April 20, 2018 – includes common/recommended indoor/outdoor light levels.

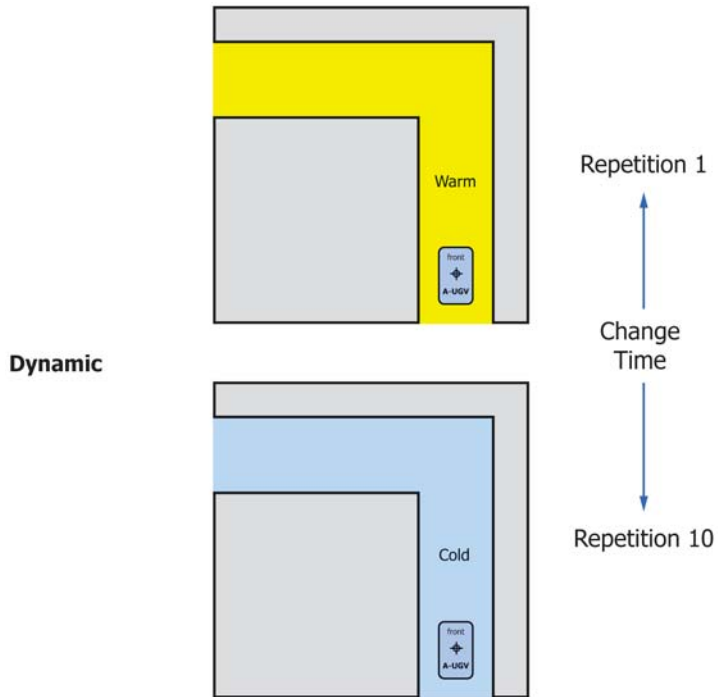


FIG. 3 Example of Dynamic Environment using Temperature and Showing that the Environment Changed during the Test



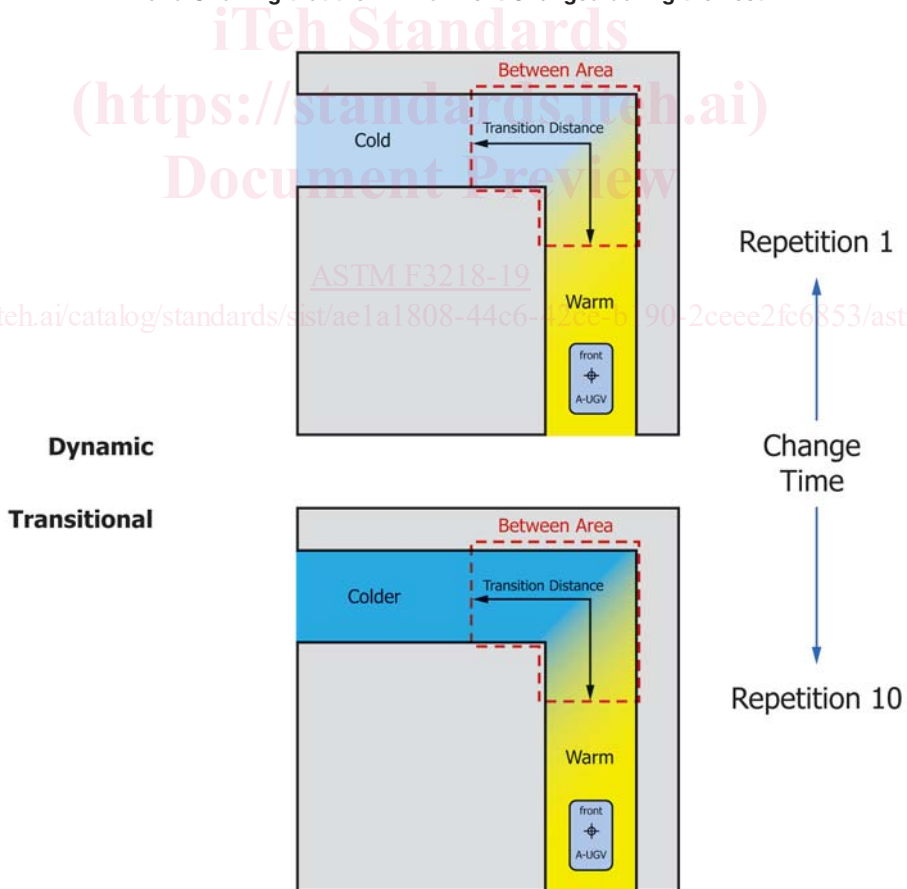


FIG. 4 Example of Transitional Environment using Temperature; Portions of the Environment May Remain Static or May Be Dynamic (for example, Cold to Colder)

(a) top view

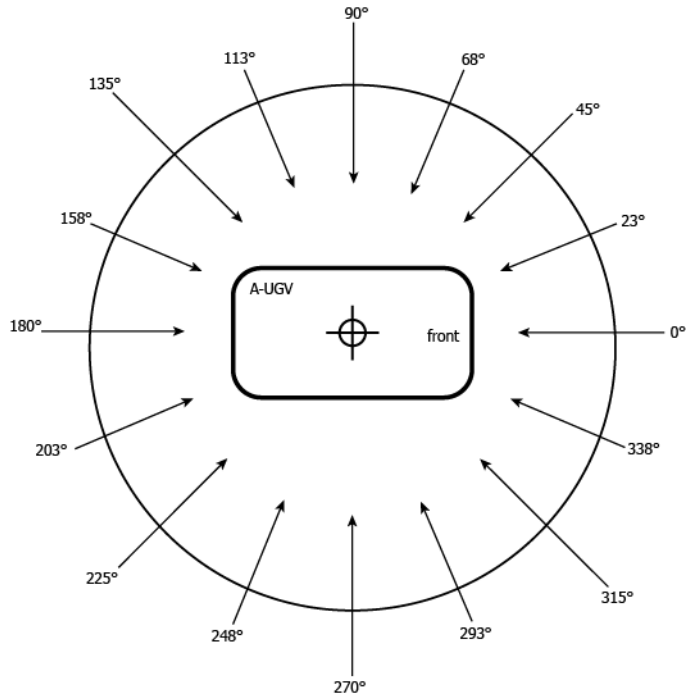

(b) side view

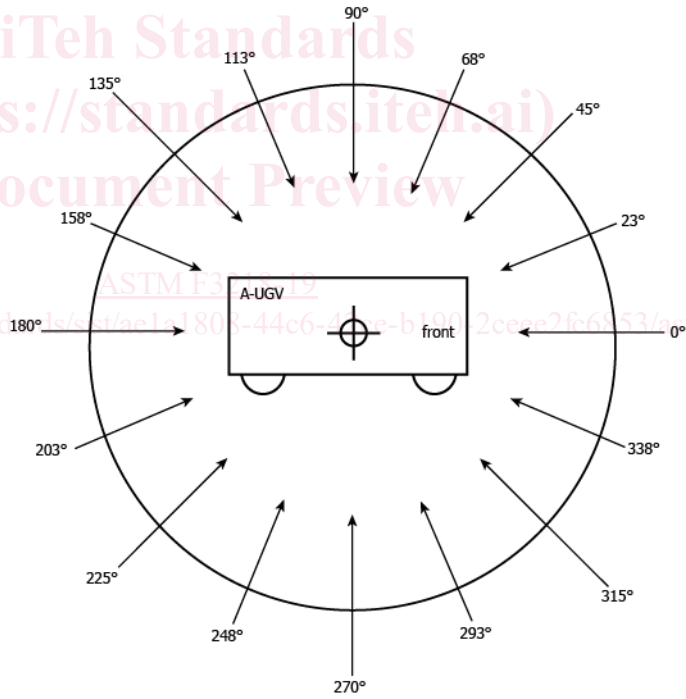

(c) elevation view

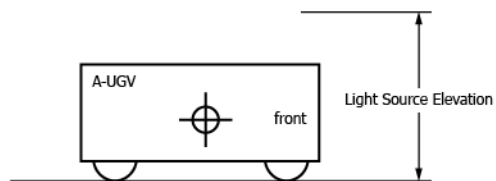


FIG. 5 Lighting Direction (a) Top View and (b) Side View and (c) Elevation View with Respect to the A-UGV

4.6.2 *Relative Humidity Level:*

- 4.6.2.1 Low – less than 30 %.
- 4.6.2.2 Moderately Low – 31 to 55 %.
- 4.6.2.3 Moderately High – 56 to 75%.
- 4.6.2.4 High – greater than 75 %.

4.6.3 *Dew Point Temperature*—The highest temperature at which airborne water vapor will condense to form liquid dew.

4.7 *Electrical Interference:*

4.7.1 Some surfaces are not conductive enough to provide adequate grounding for an A-UGV. Ground vehicles have a floating electrical ground. As static builds up on the vehicle and the voltage drop from the positive lead of the battery and the chassis changes, the electronic components of the vehicle are negatively impacted. Strong magnetic fields can impact the onboard electrical components, and in particular, any data storage within the onboard computer. Many A-UGVs require wireless network connections for full functionality. Radio frequency (RF) interference can degrade these networks and A-UGV capability.

4.7.2 For Electro-magnetic compatibility issues, refer to:

- 4.7.2.1 BS EN 12895 Electromagnetic Compatibility – Emissions and Immunity.
- 4.7.2.2 MIL-STD-462 – EMI Emissions and Susceptibility.
- 4.7.2.3 IEC 61000-4-1 Electromagnetic Compatibility (EMC) – Part 4-1: Testing and Measurement Techniques – Overview of Immunity Tests
- 4.7.2.4 IEC 61000-6 – Emission Standards for Industrial Environments

4.8 *Air Flow and Quality:*

4.8.1 Air flow and quality refers to the ability that an A-UGV can discern an object or light in the presence of air particulates or wind, or both. Air quality can affect the A-UGV performance in terms of object detection, navigation, and docking. Air quality depends upon the size and volumetric density of particulates in the air. For relative comparison, the average human eye cannot see particles smaller than 40 μm , fog from water vapor typically includes particle sizes from 5 μm to 50 μm , and dust particles are typically 0.1 μm to 100 μm . An ISO Class 1 cleanroom has no more than 10 particles larger than 0.1 μm in a cubic meter of air. Fog (water vapor) particle density of 1 amg allows human visibility of about 125 m at ground level.

4.8.2 *Air Velocity and Direction*—Document air flow source location and elevation with respect to the A-UGV (refer to Fig. 5).

4.8.3 *Air Particle Density*—Optionally, measure the air particle size and volumetric density.

- 4.8.3.1 Clear – (for example, clean room, no visible air particulates).
- 4.8.3.2 Moderate – (for example, visible fog, dust, light to moderate rain/snow/fog).
- 4.8.3.3 Dense – (for example, dust storm, heavy snow/rain/fog).

4.8.4 If more specificity of measurement is required, the following standards may be used:

- 4.8.4.1 Air particle density – Clear: ISO 14644-1.

4.9 *Floor or Ground Surface:*

4.9.1 A-UGV mobility is affected by ground surface conditions including: surface texture/roughness, deformability, sloped (ramp) or undulation (lack of flatness). Ground surface conditions can affect A-UGV: traction, vibration affecting the electronics integrity, positioning, and stability.

4.9.2 *Type(s):*

4.9.2.1 Approximate similar to the following examples where multiple floor types may be present and indicated on the report form: for example, concrete, linoleum tile, carpet, dirt, grass, asphalt, wood plank, etc.

4.9.2.2 Indicate floor anomalies within the test space: for example, floor grate, manhole cover, undetectable (by vehicle sensors) divots, transparent flooring, etc.

4.9.3 *Coefficient of Friction:*

4.9.3.1 High (for example, brushed concrete, asphalt).

4.9.3.2 Moderate (for example, polished/sealed concrete, steel plates, packed dirt).

4.9.3.3 Low (for example, icy, wet, lubricated, dry sand).

4.9.4 *Gap/Step*—Known infrastructure that could be a part of the A-UGV map (see Fig. 6).

4.9.4.1 *Gap*—Length, width, depth, and angle of gap with respect to a reference frame.

4.9.4.2 *Step*—Length, width, depth, and angle of step with respect to a reference frame.

4.9.4.3 For each gap/step, a description of the gap/step should also be documented. Examples: sharp gap (between loading dock and truck) vs. rounded gap (pothole, floor divot); sharp step (square channel metal) vs. rounded step (cable or cable cover, speed bump/hump).

4.9.5 *Deformability:*

4.9.5.1 Rigid (for example, concrete, asphalt).

4.9.5.2 Semi-rigid (for example, compacted dirt or gravel, wet sand, industrial carpet).

4.9.5.3 Soft – malleable (for example, snow, mud, dry sand, padded carpet).

4.9.6 *Grade (Ramp)*—Known infrastructure that could be a part of the A-UGV map.

4.9.6.1 Level 1*: 0 % to 3 % (for example, nominally flat floor).

4.9.6.2 Level 2*: 4 % to 7 % (for example, transitional ramp in factories).

4.9.6.3 Level 3: 8 % to 10 % (for example, yard ramp = 8 % to 9 %).

4.9.6.4 Level 4: 11 % to 15 % (for example, steep road grade).

4.9.6.5 Level 5: 16 % and above.

NOTE 1—ITSDF B56.5 defines a ramp as “a variation in floor grade in excess of 3 % and of a length where rating data variance is required.” UL 3100 Section 16.1 states “The AGV shall be capable of meeting all requirements for operation and control on an even grade and a sloped grade up to 3 % of grade.”

4.9.7 *Undulation (Lack of Flatness on the Apparatus Ground Surface):*

4.9.7.1 Flat – 0 mm to 6 mm variation over 3 m.

4.9.7.2 Moderately flat – more than 6 mm to 12 mm variation over 3 m.

4.9.7.3 Non-flat – more than 12 mm to 51 mm variation over 3 m.

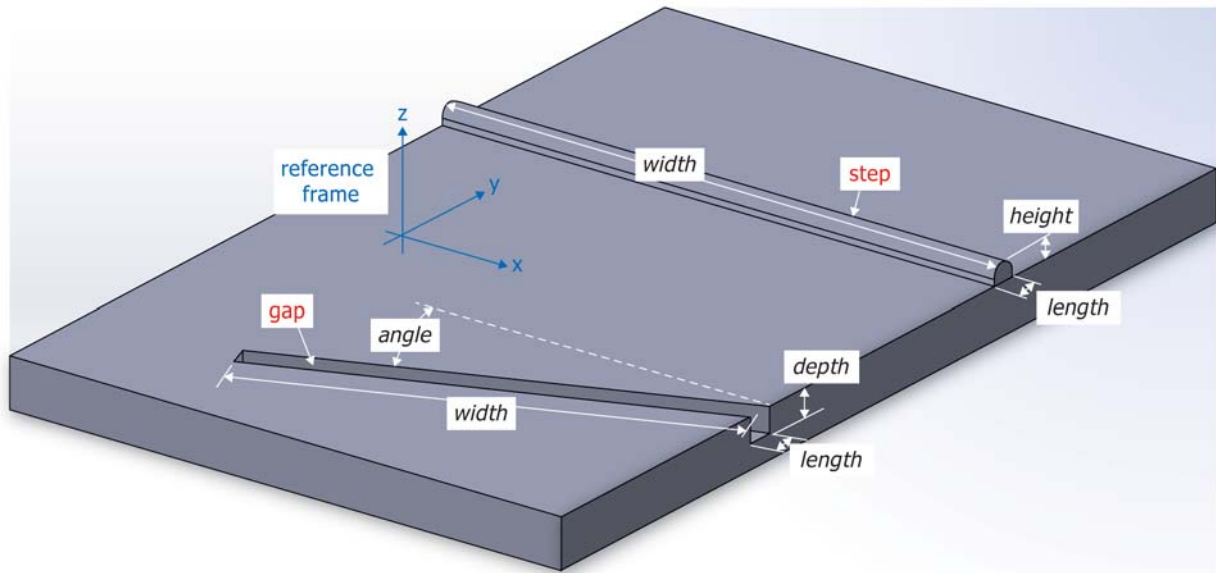


FIG. 6 Gap and Step

4.9.7.4 Outdoor – more than 51 mm variation over 3 m.

4.9.8 *Particulates (document type and describe):*

4.9.8.1 None (for example, dry, clean).

4.9.8.2 Fine (for example, cardboard dust, concrete dust).

4.9.8.3 Coarse (for example, sand, pebbles).

4.9.9 If more specificity of measurement is required, the following standards may be used:

4.9.9.1 Deformability: ASTM Test Method E1274.

4.9.9.2 Undulation: ASTM Test Method E1155M.

4.9.9.3 Coefficient of Friction: ANSI B101.3.

4.10 *Boundaries:*

4.10.1 Boundaries refer to the defining apparatus, existing structure, or ground anomalies, or combinations thereof, within which the A-UGV navigates. The characteristics for boundaries include:

4.10.2 Opaque walls (for example, white drywall, opaque plastic, reflective or flat black test boundaries, corrugated metal, curb from the road).

4.10.3 Semi-transparent walls – (for example, clear glass, frosted glass, translucent plastic).

4.10.4 Negative obstacles (for example, cliff, curb from the sidewalk, loading dock, drainage channel).

4.10.5 Virtual walls (for example, A-UGV prohibited areas mapped within the vehicle controller at edges of pedestrian walkways, edges of negative obstacles, restricted areas).

4.10.6 Porous walls (for example, wire mesh fencing, chain-link fencing).

4.10.7 Elevated dividers (for example, racking, post and beam fencing, retractable-belt dividers).

4.10.8 Building infrastructure (for example, machinery, equipment, A-UGV chargers).

4.10.9 Floor markings (for example, tape, paint).

4.10.10 Mixture of the above boundaries (for example, railing and kickplate in front of a negative drop-off at edge of a platform, post and beam fencing with wire mesh covering).

4.10.11 Moving boundaries (for example, moving sliding or hinged doors, moving curtains); the environment should be labeled as static unless the boundary moves during a test, in which case the environment should be labeled as dynamic, for example, an A-UGV drives past a soft partition that moves or an A-UGV drives through a soft partition that causes it to move.

4.10.12 If more specificity of measurement is required, the following standards and references may be used:

4.10.12.1 Floor Markings:

(1) Automotive Industry Action Group (AIAG) Occupational Health and Safety OH-2, Pedestrian and Vehicle Safety Guideline (includes description and marking depictions).

(2) ANSI/ITSDF B56.5 (section 8.11.2 describes Hazardous Zones).

(3) “Implementation of 5S Quality Tool in Manufacturing Company: A Case Study.”¹⁰

5. Procedure

5.1 When conducting the ASTM F45 test methods, the requestor can choose the environmental conditions as described in Section 4. The requestor can elect and expose any of the environmental conditions to the A-UGV under test included herein and document the levels as described in Section 4.

5.2 If environment consistency is dynamic or transitional, or both, a report form (see Section 7) for each unique set of environmental conditions should be completed.

¹⁰ V. Kakkar, V. S. Dalal, V. Choraria, A. S. Pareta, A. Bhatia, “Implementation of 5S Quality Tool in Manufacturing Company: A Case Study,” *International Journal of Scientific and Technology Research*, Vol 4, Issue 02, February 2015, ISSN 2277-8616.

6. Precision and Bias

6.1 This practice is meant to allow A-UGV test method requestors and supervisors to document environmental conditions within the generic categories listed in Section 4. The precision described in each of Section 4 sub-categories is for reporting information to A-UGV manufacturers and users to make direct comparisons of the results of the A-UGV test methods when exposed to various environmental conditions and levels.

7. Report

7.1 A report form is required for documenting environmental conditions. The form shall include the following features:

7.1.1 An approximate, dimensioned drawing of the defined space, including the A-UGV path, light(s) or other equipment that affect the test environment within the space (as appropriate).

7.1.2 An approximate, dimensioned drawing of the tool location used to measure each environmental effect. For example, include the location of the lux meter when measuring a directed light source.

7.1.3 Any additional testing features or important notes, or both, during the test of environmental conditions of the start location, between area, and goal location causing A-UGV performance variation should be documented. The Area in Apparatus field is for use if the report form refers to only a portion of the apparatus. In this case, multiple reports may be

used to describe one test apparatus (for example, when there are two different ground surface types in one apparatus).

7.1.4 The transition time and transition distance shall be documented if multiple environmental conditions are used within a single test method.

7.2 The test form (see example in Fig. 7 and an example of a completed form in Fig. X1.2) shall be filled out completely. In the situation where a particular environmental condition is not measured, it shall be noted as such using “Unknown.” If options available on the form are insufficient, check “other” and fill-in the provided line.

7.2.1 If multiple environmental conditions within the same category are evident in the test space, check all that apply and document in the dimensioned drawing.

7.2.2 If there are additional environmental conditions that are not listed in Section 4, document them in the Notes section of the form.

7.3 Describe how each environmental effect was measured, referring to the device used and how it was used. For example, “holding a lux meter 10 cm away from the light source.”

NOTE 2—The implementation of a form is not standardized. As such, the resulting forms can be different while conforming to this specification. Fig. 7 provides an illustration of a blank test form for this practice.

8. Keywords

8.1 air quality; electrical interference; ground surface; humidity; lighting; temperature

standards
(<https://standards.iteh.ai>)
Document Preview

[ASTM F3218-19](#)

<https://standards.iteh.ai/catalog/standards/sist/ae1a1808-44c6-42ce-b190-2ceec2fc6853/astm-f3218-19>

F3218 Standard Practice for Documenting Environmental Conditions for Utilization with A-UGV Test Methods

DATE: _____ TEST METHOD: _____
 LOCATION: _____ AREA IN APPARATUS: _____

DIMENSIONED AND LABELED DRAWING OF TEST METHOD APPARATUS:

(mark environmental conditions, associated measurement values, and how measurements were taken throughout test method apparatus; e.g., draw boundaries in test space and note what type they are, mark light source locations with lux values and where the lux meter was when the lux measurements were obtained, mark each type of ground surface in the apparatus, etc.)

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ASTM F3218-19](#)

<https://standards.iteh.ai/catalog/standards/sist/ae1a1808-44c6-42ce-b190-2ceee2fc6853/astm-f3218-19>

Environment Consistency: Static Dynamic Transitional Transition Distance Change Time

If the environment is dynamic and/or transitional, the change in environmental conditions should be demonstrated in the drawing above. (e.g., if a door boundary is closed for part of the test, but is then opened for a later part of the test, illustrate both states in the drawing above). Multiple report forms should be used to describe each unique environmental condition.

Describe the test under which these environmental conditions are used and describe each unique environmental condition in the notes page at the end of this form.

TEST TECHNICIAN: _____

FIG. 7 Test Report

F3218 Standard Practice for Documenting Environmental Conditions for Utilization with A-UGV Test Methods

(check all that apply for the given test; specify individual measures and their locations on drawing of test method apparatus on first page)

AMBIENT LIGHTING		<input checked="" type="checkbox"/> None	<input checked="" type="checkbox"/> Unknown
Type:	<input checked="" type="checkbox"/> Exposed bulb <input checked="" type="checkbox"/> Spotlight <input checked="" type="checkbox"/> Sunlight <input checked="" type="checkbox"/> Reflected <input checked="" type="checkbox"/> Filtered <input checked="" type="checkbox"/> Other: _____	<input checked="" type="checkbox"/> Unknown	
Quantity:	_____		
Brand or Name:	_____ <input checked="" type="checkbox"/> Unknown	Describe how measured: _____ <input checked="" type="checkbox"/> Unknown	
Location:	_____ m Elevation with respect to apparatus ground	Location with respect to A-UGV <input checked="" type="checkbox"/> Unknown Mark on diagrams below:	
Side view:			
Level:	<input checked="" type="checkbox"/> Level 1 0 – 1 lux _____ lux <input checked="" type="checkbox"/> Level 2 2 – 99 lux _____ lux <input checked="" type="checkbox"/> Level 3 100 – 1000 lux _____ lux <input checked="" type="checkbox"/> Level 4 1001 – 9,999 lux _____ lux <input checked="" type="checkbox"/> Level 5 10,000 lux + _____ lux	<input checked="" type="checkbox"/> Unknown	
Spectrum: Primary color:	_____		<input checked="" type="checkbox"/> Unknown
Polarization: Source:	_____		<input checked="" type="checkbox"/> Unknown
	Angle: _____	Reference: _____	<input checked="" type="checkbox"/> Unknown
DIRECTED LIGHTING		<input checked="" type="checkbox"/> None	<input checked="" type="checkbox"/> Unknown
Type:	<input checked="" type="checkbox"/> Exposed bulb <input checked="" type="checkbox"/> Spotlight <input checked="" type="checkbox"/> Sunlight <input checked="" type="checkbox"/> Reflected <input checked="" type="checkbox"/> Filtered <input checked="" type="checkbox"/> Laser <input checked="" type="checkbox"/> From another vehicle <input checked="" type="checkbox"/> Other: _____	<input checked="" type="checkbox"/> Unknown	
Quantity:	_____		
Brand or Name:	_____ <input checked="" type="checkbox"/> Unknown	Describe how measured: _____ <input checked="" type="checkbox"/> Unknown	
Location:	_____ m Elevation with respect to apparatus ground	Location with respect to A-UGV <input checked="" type="checkbox"/> Unknown Mark on diagrams below:	
Side view:			
Level:	<input checked="" type="checkbox"/> Level 1 0 – 1 lux _____ lux <input checked="" type="checkbox"/> Level 2 2 – 99 lux _____ lux <input checked="" type="checkbox"/> Level 3 100 – 1000 lux _____ lux <input checked="" type="checkbox"/> Level 4 1001 – 9,999 lux _____ lux <input checked="" type="checkbox"/> Level 5 10,000 lux + _____ lux	<input checked="" type="checkbox"/> Unknown	
Spectrum: Primary color:	_____		<input checked="" type="checkbox"/> Unknown
Polarization: Source:	_____		<input checked="" type="checkbox"/> Unknown
	Angle: _____	Reference: _____	<input checked="" type="checkbox"/> Unknown
TEST TECHNICIAN: _____			

FIG. 7 Test Report (continued)