

INTERNATIONAL STANDARD



**Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –
Part 2-1: Tests – Vibration (sinusoidal)**

Document Preview

[IEC 61300-2-1:2023](#)

<https://standards.iteh.ai/catalog/standards/iec/953353cc-15dc-4bb5-9a8a-e385c69b59ea/iec-61300-2-1-2023>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2023 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

International Standards
Document Preview

[IEC 61300-2-1-2023](https://standards.iteh.ai/catalog/standards/iec/953353cc-15dc-4bb5-9a8a-e385c69b59ea/iec-61300-2-1-2023)

<https://standards.iteh.ai/catalog/standards/iec/953353cc-15dc-4bb5-9a8a-e385c69b59ea/iec-61300-2-1-2023>



IEC 61300-2-1

Edition 4.0 2023-01
REDLINE VERSION

INTERNATIONAL STANDARD



**Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –
Part 2-1: Tests – Vibration (sinusoidal)**

Document Preview

[IEC 61300-2-1:2023](https://standards.iteh.ai/catalog/standards/iec/953353cc-15dc-4bb5-9a8a-e385c69b59ea/iec-61300-2-1-2023)

<https://standards.iteh.ai/catalog/standards/iec/953353cc-15dc-4bb5-9a8a-e385c69b59ea/iec-61300-2-1-2023>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.180.20

ISBN 978-2-8322-6414-0

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references	5
3 Terms and definitions	5
4 General description	5
5 Apparatus.....	6
5.1 General.....	6
5.2 Vibration generator	6
5.3 Mounting fixture	6
5.4 Acceleration monitoring device	6
5.5 Measuring equipment.....	6
6 Procedure.....	6
6.1 Preparation of DUT	6
6.2 Preconditioning.....	6
6.3 Initial examination and measurement	6
6.4 Conditioning Mounting and test procedure	7
6.5 Monitoring.....	8
6.6 Recovery	8
6.7 Final examination and measurement.....	8
7 Severity	8
8 Details to be specified and reported.....	9
Bibliography.....	12
Figure 1 – Example of vibration apparatus.....	7
Table 1 – Recommended values of the test parameters for connectors and passive components	9
Table 2 – Recommended values of the test parameters for fibre management systems and closures	9
Table 3 – Recommended values of the test parameters for mechanical splices and field mountable connectors	9
Table 4 – Recommended values of the test parameters for wall outlets and optical distribution frame modules	10
Table 5 – Recommended values of the test parameters for hardened optical connectors	10
Table 6 – Recommended values of the test parameters for boxes and closures	10
Table 7 – Recommended values of the test parameters for street cabinets	10

<https://standards.iteh.ai/catalog/standards/iec/953353cc-15dc-4bb5-9a8a-e385c69b59ea/iec-61300-2-1-2023>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIBRE OPTIC INTERCONNECTING
DEVICES AND PASSIVE COMPONENTS –
BASIC TEST AND MEASUREMENT PROCEDURES –****Part 2-1: Tests – Vibration (sinusoidal)****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition IEC 61300-2-1:2009. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

IEC 61300-2-1 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics. It is an International Standard.

This fourth edition cancels and replaces the third edition published in 2009. This edition constitutes a technical revision.

This edition includes the following significant technical change with respect to the previous edition: harmonizing with the test conditions in IEC 61753-1:2018 and revising severities.

The text of this International Standard is based on the following documents:

Draft	Report on voting
86B/4692/FDIS	86B/4724/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts of IEC 61300 series, published under the general title *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –

Part 2-1: Tests – Vibration (sinusoidal)

1 Scope

This part of IEC 61300 evaluates the effects of vibration on fibre optic devices at the predominant frequency ranges and magnitudes that ~~may be~~ are encountered during field service on attenuation.

NOTE Most vibrations encountered in service are not of a simple harmonic nature. However, it has been shown that tests based on vibrations of this type are satisfactory to simulating actual service.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-2-6, *Environmental testing – Part 2-6: Tests – Test Fc: Vibration (sinusoidal)*

IEC 61300-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 1: General and guidance*

IEC 61300-3-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-1: Examinations and measurements – Visual examination*

~~IEC 61300-3-3, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-3: Examinations and measurements – Active monitoring of changes in attenuation and return loss*~~

IEC 61300-3-28, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-28: Examinations and measurements – Transient loss*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61300-1 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

4 General description

This procedure is derived from IEC 60068-2-6, test Fc. The device under test (DUT) is mounted on a vibration generator and vibrated with a sinusoidal motion. The DUT is exposed to vibration in three mutually perpendicular directions, one of which is parallel to the optical axis. The

vibration amplitude is specified either in terms of constant displacement or constant acceleration.

5 Apparatus

5.1 General

The apparatus shall be in accordance with IEC 60068-2-6, test Fc, and consists of the following elements.

5.2 Vibration generator

A vibration generator capable of generating a sinusoidal excitation and its auxiliary test equipment.

5.3 Mounting fixture

A suitable DUT mounting fixture capable of transmitting the vibration conditions specified shall be used. The mounting fixture shall be designed so that the resonant vibration inherent in the fixture shall not have an effect on the specified frequency range.

5.4 Acceleration monitoring device

The amplitude and the acceleration of the applied vibration shall be monitored by an acceleration monitoring device, i.e. accelerometer on the ~~test~~ mounting fixture near the DUT ~~mounting points~~.

5.5 Measuring equipment

~~Unless otherwise specified, measuring equipment specified in IEC 61300-3-3 shall be connected to the DUT for monitoring the optical performances during the test; moreover~~ The transient loss ~~measuring~~ measurement equipment specified in IEC 61300-3-28 shall be connected to the DUT and used to detect fast variation of attenuation during and after the test, unless otherwise specified in the relevant specification.

6 Procedure

6.1 Preparation of DUT

Prepare the DUT according to the manufacturer's instructions ~~or~~ and as specified in the relevant specification.

6.2 Preconditioning

Precondition the DUT for more than or equal to 2 h at the standard ~~test~~ atmospheric conditions specified in IEC 61300-1, unless otherwise specified in the relevant specification.

6.3 Initial examination and measurement


Complete initial examinations and measurements of the DUT as required by the relevant specification.

Unless otherwise specified, visually examine the DUT in accordance with IEC 61300-3-1. Check for evidence of any degradation in the DUT. The following are possible examples of degradation:

- broken, loose or damaged parts or accessories;
- breaking or damage to the cable jacket, seals, strain relief, or fibres;
- displaced, bent, broken or chipped parts.

6.4 Conditioning Mounting and test procedure


The DUT shall be mounted rigidly to the fixture in a manner that simulates normal mounting as closely as possible. ~~A minimum of 200 mm~~ Greater than 20 cm of optical fibre/cable shall be unsupported on both ends of the DUT and be attached free of tension to the vibrating surface. Conduct the procedure in accordance with IEC 60068-2-6, test Fc. The DUT shall be vibrated in three mutually perpendicular axes coincident with the principal axes of the device. If the sample has axial symmetry, the number of axes to be tested can be reduced to two. The vibration endurance shall be performed by sweeping continuously between minimum and maximum frequency at a specified rate. An example of vibration apparatus test is outlined in Figure 1.

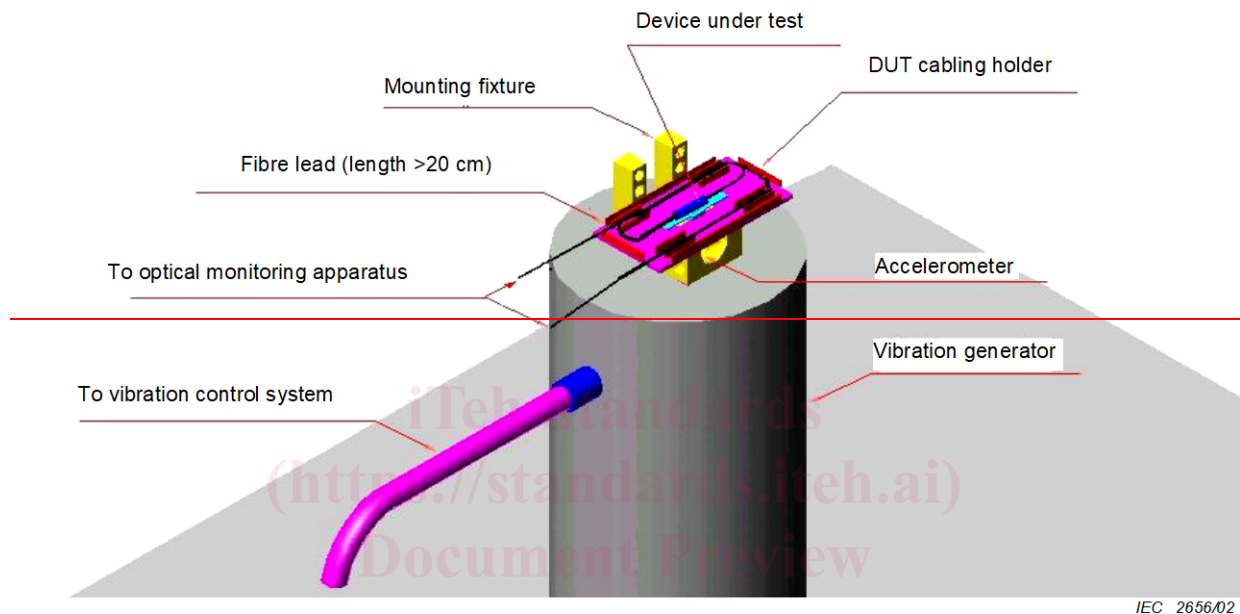

IEC 2656/02

IEC 61300-2-1:2023

<https://standards.iteh.ai/catalog/standards/iec/953353cc-15dc-4bb5-9a81-385c69b59ea/iec-61300-2-1-2023>

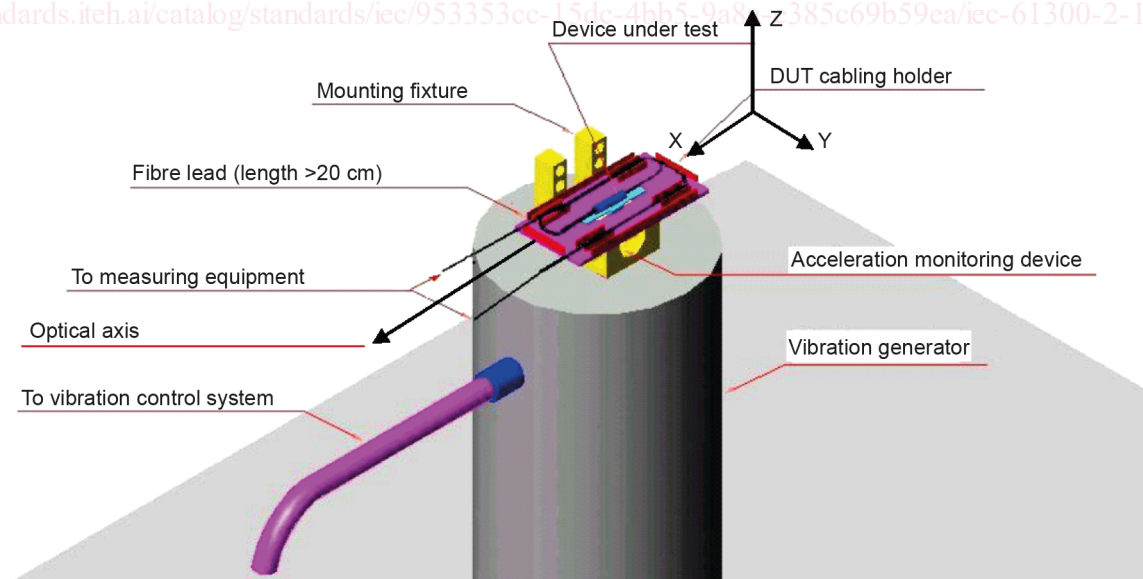

IEC

Figure 1 – Example of vibration apparatus

6.5 Monitoring

The ~~attenuation and/or return~~ transient loss of the DUT shall be monitored during and after the test using ~~an x-y plotter~~, a recording mean such as a computer, oscilloscope or ~~and~~ a digital data acquisition system ~~for recording~~ with memory as described in IEC 61300-3-28, unless otherwise specified in the relevant specification. Any change in optical performance shall be within the limit given in the relevant specification.

6.6 Recovery

Allow the DUT to remain under standard ~~test~~ atmospheric conditions for more than or equal to 2 h, as defined in IEC 61300-1, unless otherwise specified in the relevant specification. ~~Clean the DUT in accordance with the manufacturer's instructions.~~

6.7 Final examination and measurement

~~On~~ After completion of the test, ~~remove all~~ the DUT shall be removed from the fixtures, and ~~make~~ the final measurements shall be made, as defined by the relevant specification, to ensure that there is no permanent damage to the DUT. The results of the final measurement shall be within the limit established in the relevant specification.

Unless otherwise specified, visually examine the DUT in accordance with IEC 61300-3-1. Check for evidence of any degradation in the DUT. ~~This may include, for example~~
The following are possible examples of degradation:

- broken, loose or damaged parts or accessories;
- breaking or damage to the cable jacket, seals, strain relief, or fibres;
- displaced, bent, broken or chipped parts.

7 Severity

The severity consists of the combination of frequency range, vibration amplitude, sweep rate and either number of sweeps or ~~endurance~~ duration per axis. The severity shall be specified in the relevant specification. Recommended values of the test parameters are given below in ~~Table 1 and 2~~ Table 1 through Table 7 for the various configurations.

Table 1 – Recommended values of the test parameters for connectors and passive components

Category	Parameter	Value
Categories C, U , C ^{HD} , OP, OP+, OP+ ^{HD} and E	Frequency range	10 Hz to 55 Hz
	Sweep rate	1 oct/min
	Number of sweeps	15/axis
	Amplitude	0,75 mm
Category O	Frequency range	10 Hz—55 Hz
	Sweep rate	1 oct/min for passive components 45 Hz/min for connectors
	Duration	2 h/axis
	Amplitude	1,52 mm for passive components 0,75 mm for connectors
Categories I and I ^{HD}	Frequency range	2 Hz to 200 Hz
	Sweep rate	1 oct/min
	Number of sweeps	15/axis
	Amplitude	15 mm at frequencies below 9 Hz
	Acceleration	50 m/s ² at frequencies above 9 Hz
NOTE Categories are defined in IEC 61753-1.		

Table 2 – Recommended values of the test parameters for fibre management systems ~~and closures~~

Category	Parameter	Value
Categories C, A, G and S C ^{HD} , OP, OP+, OP+ ^{HD} and OP ^{HD}	Frequency range	5 Hz to 500 Hz
	Sweep rate	1 oct/min
	Number of sweeps	10/axis
	Amplitude	3,5 mm below 9 Hz
	Acceleration	9,8 10 m/s ² above 9 Hz
NOTE Categories are defined in IEC 61753-1.		

Table 3 – Recommended values of the test parameters for mechanical splices and field mountable connectors

Category	Parameter	Value
Categories C, C ^{HD} , OP, OP+, OP+ ^{HD} and OP ^{HD}	Frequency range	10 Hz to 55 Hz
	Sweep rate	1 oct/min
	Number of sweeps	15/axis
	Amplitude	0,75 mm
NOTE Categories are defined in IEC 61753-1.		