



SLOVENSKI STANDARD

SIST EN 27811-2:1998

01-junij-1998

Identification cards - Recording technique - Part 2: Magnetic stripe (ISO 7811-2:1985)

Identification cards - Recording technique - Part 2: Magnetic stripe (ISO 7811-2:1988, ed. 1)

Kennkarten - Aufzeichnungstechnik - Teil 2: Magnetstreifen (ISO 7811-2:1988, Ausg. 1)

Cartes d'identification - Technique d'enregistrement - Partie 2: Magnétique (ISO 7811-2:1988, éd. 1)

iTeh STANDARD PREVIEW

(standards.iteh.ai)

SIST EN 27811-2:1998

Ta slovenski standard je istoveten z: EN 27811-2:1989

<https://standards.iteh.ai/catalog/standards/sist/041980b6-f5b-4ee7-8579-041c41b3599/sist-en-27811-2-1998>

ICS:

35.240.15	Identifikacijske kartice in sorodne naprave	Identification cards and related devices
-----------	---	--

SIST EN 27811-2:1998

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 27811-2:1998](https://standards.iteh.ai/catalog/standards/sist/041980b6-ff5b-4ee7-8579-641e4ff63599/sist-en-27811-2-1998)

<https://standards.iteh.ai/catalog/standards/sist/041980b6-ff5b-4ee7-8579-641e4ff63599/sist-en-27811-2-1998>

EUROPEAN STANDARD

EN 27 811

NORME EUROPEENNE

Part 2

EUROPAISCHE NORM

March 1989

UDC 336.717.12:621.327.65

Key words: Identification cards, data recording, magnetic recording, recording tracks, codification, coded character sets, information interchange

English version

Identification cards. Recording technique. Part 2:
magnetic stripe (ISO 7811-2, 1st edition, 1988)

Cartes d'identification. Technique d'enregistrement. Partie 2: magnétique (ISO 7811-2, 1ère édition, 1988)	Kennkarten. Aufzeichnungstechnik. Teil 2: Magnetstreifen (ISO 7811-2, 1 Ausgabe, 1988)
--	--

This European Standard was accepted by CEN on 1988-12-21 and is identical to the ISO standard as referred to.

CEN members are bound to comply with the requirements of the CEN/CENELEC Common Rules which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Central Secretariat or to any CEN member.

SIST EN 27811-2:1998

This European Standard exists in three official versions (English, French, German). A version in any other language may be translation under the responsibility of a CEN member into its own language and notified to CEN Central Secretariat has the same status as the official versions.

CEN members are the national standards organizations of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxemburg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue Bréderode 2, B-1000 Brussels

(c) CEN 1989 Copyright reserved to all CEN members

Ref. No. EN 27 811-2:1989 E

EN 27 811 Part 2 Page 2

BRIEF HISTORY

The Technical Board has decided to submit the International Standard

ISO 7811-2, 1st edition 1985 "Identification cards; Recording technique; Part 2: Magnetic stripe"

to the formal vote. The result of this vote was positive.

For the time being, this document exists only in the English and the French versions.

According to the CEN/CENELEC Common Rules, the following countries are bound to implement this standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxemburg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

[SIST EN 27811-2:1998](https://standards.iteh.ai/catalog/standards/sist/041980b6-f5b-4ee7-8579-641e4ff63599/sist-en-27811-2-1998)

<https://standards.iteh.ai/catalog/standards/sist/041980b6-f5b-4ee7-8579-641e4ff63599/sist-en-27811-2-1998>

STATEMENT

The text of the International Standard ISO 7811-2, 1st edition, 1985, was approved by CEN as a European Standard without any modification.



International Standard



7811/2

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

**Identification cards — Recording technique —
Part 2: Magnetic stripe**

Cartes d'identification — Technique d'enregistrement — Partie 2: Magnétique

First edition — 1985-12-15

ITeH STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 27811-2:1998](https://standards.iteh.ai/catalog/standards/sist/041980b6-f5b-4ec7-8579-641e4ff63599/sist-en-27811-2-1998)

<https://standards.iteh.ai/catalog/standards/sist/041980b6-f5b-4ec7-8579-641e4ff63599/sist-en-27811-2-1998>

UDC 681.178.5 : 681.327.65

Ref. No. ISO 7811/2-1985 (E)

Descriptors : information interchange, data recording, identity cards, magnetic cards, magnetic recording, coded character sets, characteristics.

Price based on 8 pages

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 7811/2 was prepared by Technical Committee ISO/TC 97, *Information processing systems*.

The following International Standards cancel and replace ISO 2894 and ISO 3554, of which they constitute a technical revision:

ISO 7810, ISO 7811/1, ISO 7811/2, ISO 7811/3, ISO 7811/4, ISO 7811/5, ISO 7812, ISO 7813.

Users should note that all International Standards undergo revision from time to time and that any reference made herein to any other International Standard implies its latest edition, unless otherwise stated.

Identification cards — Recording technique — Part 2: Magnetic stripe

0 Introduction

This International Standard is one of a series of standards describing the parameters for identification cards as defined in clause 3 below and the use of such cards for international interchange.

1 Scope and field of application

This part of ISO 7811 specifies characteristics for a magnetic stripe (including any protective overlay) on an identification card, the encoding technique and coded character sets. The magnetic recordings are intended for machine reading.

2 References

ISO 7810, *Identification cards — Physical characteristics*.

ISO 7811, *Identification cards — Recording technique*

— Part 4: *Location of read-only magnetic tracks — Tracks 1 and 2.*

— Part 5: *Location of read-write magnetic track — Track 3.*

3 Definitions

For the purpose of this part of ISO 7811, the definition of "identification card" given in ISO 7810 and the following definitions apply.

3.1 primary standard: The NBS Master Standard Magnetic Tape (computer amplitude reference) kept in repository at the United States National Bureau of Standards (NBS).

NOTE — The relationship (correction factor) between the Master Standard and reference tape SRM 3200 is given by the NBS certificate supplied with the tape.

3.2 reference card¹⁾: A reference card, which shall be considered a secondary standard, comprises an ID card with a magnetic stripe consisting of secondary standard magnetic tape (computer amplitude reference) SRM 3200.

NOTE — The secondary reference card should be corrected to the master standard first using the correction factor provided by the supplier. Then the location of the window is calculated (see figure 5).

3.3 flux transition: The location of the maximum of the magnitude of the magnetic flux component normal to the surface of the magnetic stripe.

3.4 reference current (I_R): The minimum recording current amplitude (square wave) which causes on the reference card, under the given test conditions, a readback voltage amplitude equal to 80 % of the maximum amplitude (see figure 5) at a density of 8 ftpmm (flux transitions per millimetre) [200 ftpi (flux transitions per inch)].

3.5 test recording currents: Two test recording currents (square wave) at 350% and 500 % of the reference current (I_R) shall be used.

3.6 average signal amplitude: The readback voltage, measured peak-to-peak, averaged over the total recording area of a card when recorded with the test recording current at the specified recording density.

3.7 reference signal amplitude: The maximum average signal amplitude of the reference card corrected to the master standard.

3.8 individual signal amplitude: The peak-to-peak amplitude of a single readback voltage signal.

3.9 test density: Densities of 8 ftpmm (200 ftpi) and 20 ftpmm (500 ftpi) which may be used for testing.

NOTE — When testing with the reference card, densities of 6 ftpmm (150 ftpi) and 16,6 ftpmm (420 ftpi) may be used. The correlation factors are:

$$\frac{\text{amplitudes 6 ftpmm (150 ftpi)}}{\text{amplitudes 8 ftpmm (200 ftpi)}} \times 100 = 100 \%$$

$$\frac{\text{amplitudes 16,6 ftpmm (420 ftpi)}}{\text{amplitudes 20 ftpmm (500 ftpi)}} \times 100 = 105 \%$$

1) These cards can be ordered from Physikalisch-Technische Bundesanstalt, Lab. 1.41 — Bundesallee 100, D-3 300 Braunschweig, Germany, F.R. as long as available.

4 Physical characteristics of the identification card

The identification card shall conform to the specifications given in ISO 7810.

WARNING — The attention of card issuers is drawn to the fact that information held on the magnetic stripe may be rendered ineffective through contamination by contact with dirt and certain commonly used chemicals including plasticizers. Further, exposure of the card to an intense magnetic field is likely to destroy the recorded data.

5 Physical characteristics of the magnetic material

5.1 Thickness

The height of the reading surface above the back surface of the card, when profiled with a stylus of between 0,38 mm (0.015 in) and 2,54 mm (0.100 in) radius, shall be

- 0 mm min. (0 in min.)
- 0,038 mm max. (0.001 5 in max.)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

5.2 Surface roughness

The average surface irregularity of the magnetic surface shall not exceed 0,404 μm (15.9 μin) CLA (centreline average) in both the longitudinal and transverse directions, when using a cut-off wavelength of 0,25 mm (0.01 in) or 0,76 mm (0.03 in) and a stylus of radius 2,54 μm max. (100 μin max.)

5.3 Surface profile

The average profile of the minimum magnetic stripe width (see figures 1 and 2) when measured parallel to the height of the card with a probe having a radius of 0,38 mm (0.015 in) to 2,54 mm (0.100 in) shall not show a vertical deviation from a straight line connecting the minimum strip width of more than 3,8 μm (150 μin) for every 2,54 mm (0.100 in) of stripe width (see figure 3).

During the measurement the back (magnetic stripe side) of the card shall be held parallel to the surface by means of a 2,2 N (0.51 lbf) load evenly distributed over the back of the measurement area.

NOTES

1 Spiking in the profile caused by material "squirt-out" in hot stamping is not part of the stripe. It should not extend above the projected stripe surface (see figure 4).

2 Locating the magnetic material on top of printing is not recommended. When edge bleed (ink covering the overlay seal) is present, the card is more susceptible to fray and delamination problems.

3 It is necessary to have a defined method of measuring the surface profile in order to ensure uniformity. Methods of measurement are being evaluated and an agreed procedure will be added in this International Standard at the earliest opportunity.

5.4 Adhesion of stripe to card

The stripe shall not separate from the card under normal use.

6 Performance characteristics of the magnetic material for newly manufactured identification cards

6.1 General

This method uses a certified reference card whose magnetic material is traceable to a primary standard magnetic tape.

The test does not guarantee any minimum or maximum value of intrinsic coercivity H_{ci} . The specification of this parameter (if required) is left to the individual card purchasers. In general, higher coercivities provide greater resistance to erasure at increased cost.

6.2 Track 1, 2 and 3 (read only or read/write)

All measurements shall be made using the same device and under the same conditions.

6.2.1 Signal amplitude

When the magnetic material with any protective coatings in place is recorded with the test recording currents (see 3.5) at 8 ftpmm (200 ftpi) the signal amplitude shall be within 80 % to 130 % of the reference signal amplitude (see figure 5).

The signal amplitude obtained at this density, after recording with a test recording current of 500 % I_R , shall not exceed the signal amplitude obtained at the same density with a recording current of 350 % of I_R . The slope of the saturation curve shall never be positive between these two points.

When recorded with the same test recording currents (see 3.5) at 20 ftpmm (500 ftpi) and with all other parameters identical, the signal amplitude shall be not less than 70 % of that obtained at 8 ftpmm (200 ftpi) i.e.

$$\frac{\text{amplitude 20 ftpmm (500 ftpi)}}{\text{amplitude 8 ftpmm (200 ftpi)}} \times 100 \% = 70 \%$$

NOTE — The resolution of the read head sub-system (head amplifier) should be in the range of 90 % to 100 % when defined as

$$\frac{\text{amplitude 20 ftpmm (500 ftpi)}}{\text{amplitude 8 ftpmm (200 ftpi)}} \times 100 \% = 90 \dots 100 \%$$

Dimensions in millimetres
(dimensions in inches in parentheses)

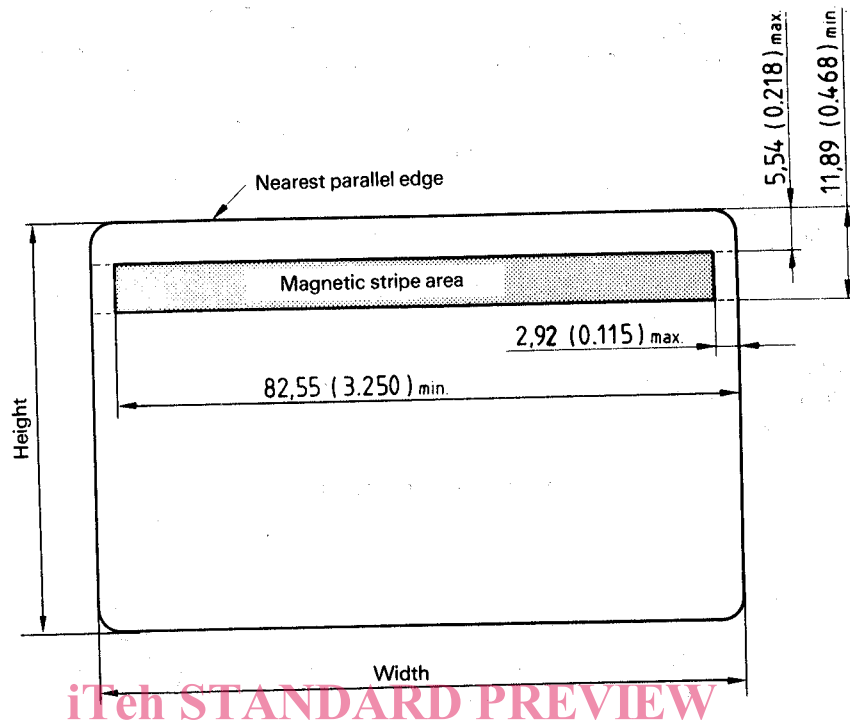


Figure 1 — Location of magnetic material for tracks 1 and 2 only on ID-1 type card

SIST EN 27811-2:1998
<https://standards.iteh.ai/catalog/standards/sist/0419d1e1-4101-4101-641e4ff63599/sist-en-27811-2-1998>
 Dimensions in millimetres
(dimensions in inches in parentheses)

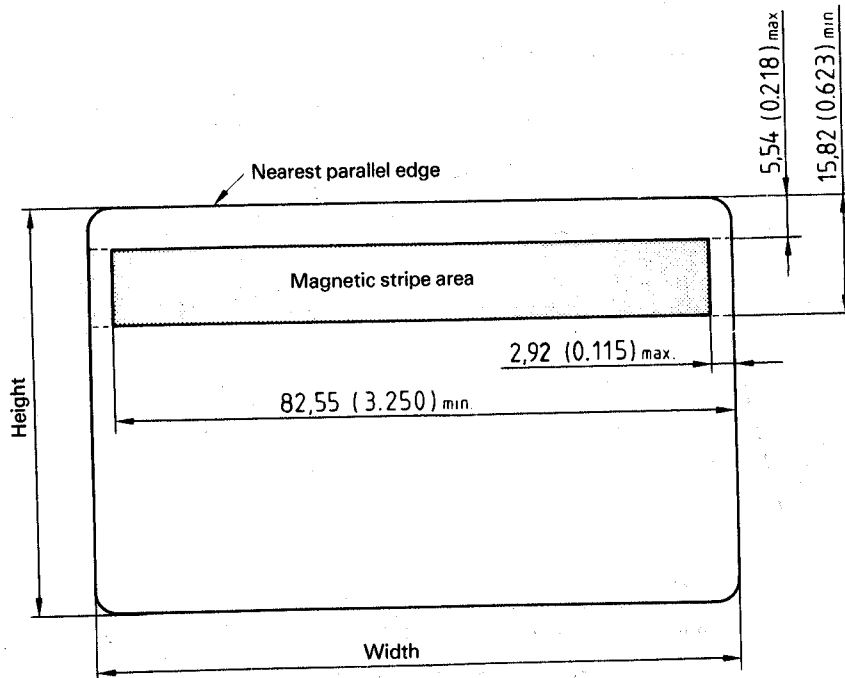


Figure 2 — Location of magnetic material for tracks 1, 2 and 3 on ID-1 type card

NOTE — While these dimensions state the maximum and minimum distance from the nearest parallel edge, the magnetic material areas are not precluded from covering a greater area than indicated.