

INTERNATIONAL STANDARD

ISO
4548-9

First edition
1995-07-01

Methods of test for full-flow lubricating oil filters for internal combustion engines —

Part 9:

Inlet and outlet anti-drain valve tests

(standards.iteh.ai)

*Méthodes d'essai des filtres à huile de lubrification à passage intégral pour
moteurs à combustion interne —*

<https://standards.iteh.ai/catalog/standards/sist/id907c31-5c06-49bd-a61b-7d435c060a10/iso-4548-9-1995>

Partie 9: Essais des clapets de non-retour aval et amont

INTERNATIONAL

ISO



Reference number
ISO 4548-9:1995(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 4548-9 was prepared by Technical Committee ISO/TC 70, *Internal combustion engines*, Subcommittee SC 7, *Tests for lubricating oil filters*.

This first edition of ISO 4548-9 cancels and replaces ISO 4548-8:1990.

ISO 4548 consists of the following parts, under the general title *Methods of test for full-flow lubricating oil filters for internal combustion engines*:

- *Part 1: Pressure drop/flow characteristics*
- *Part 2: Element by-pass component characteristics*
- *Part 3: Resistance to high pressure drop and to elevated temperature*
- *Part 4: Initial particle retention efficiency, life and cumulative efficiency (gravimetric method)*
- *Part 5: Cold start simulation and hydraulic pulse durability test*
- *Part 6: Static burst pressure test*
- *Part 7: Vibration fatigue test*
- *Part 9: Inlet and outlet anti-drain valve tests*

© ISO 1995

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

- *Part 10: Life and cumulative efficiency in the presence of water in oil*
- *Part 11: Self-cleaning filters*
- *Part 12: Particle retention ability and contaminant holding capacity using particle counting*

Annex A of this part of ISO 4548 is for information only.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 4548-9:1995

<https://standards.iteh.ai/catalog/standards/sist/fd907c31-5c06-49bd-a61b-9d439c0d60fd/iso-4548-9-1995>

Introduction

International Standard 4548 establishes standard test procedures for measuring the performance of full-flow lubricating oil filters for internal combustion engines. It has been prepared in separate parts, each part relating to a particular performance characteristic.

Together the tests provide the information necessary to assess the characteristics of a filter, but if agreed between the purchaser and the manufacturer, the tests may be conducted separately.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 4548-9:1995

<https://standards.iteh.ai/catalog/standards/sist/fd907c31-5c06-49bd-a61b-9d439c0d60fd/iso-4548-9-1995>

Methods of test for full-flow lubricating oil filters for internal combustion engines —

Part 9:

Inlet and outlet anti-drain valve tests

1 Scope

This part of ISO 4548 specifies methods of measuring the effectiveness of either inlet or outlet anti-drain valves if fitted to a full-flow lubricating oil filter of the "spin-on" or "easy change" type, for internal combustion engines.

2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this part of ISO 4548. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this part of ISO 4548 are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 4548-1:1982, *Methods of test for full-flow lubricating oil filters for internal combustion engines — Part 1: Pressure drop/flow characteristics*.

3 Definitions

For the purposes of this part of ISO 4548 the definitions given in ISO 4548-1 apply.

4 Principle

4.1 Inlet anti-drain valve

Assessment of the capability of the inlet anti-drain valve to prevent oil contained in the filter from draining out of the inlet when the engine is stopped.

4.2 Outlet anti-drain valve

Assessment of the capability of the outlet anti-drain valve to prevent oil contained in the filter from draining out of the outlet when the engine is stopped.

5 Test rigs

Suggested test rigs are shown diagrammatically in figures 1 to 3. Figures 1 and 2 are simplified rigs for basic tests. Figure 3 is a more complicated rig involving the means to raise and lower the header tank at a fixed speed of 0,5 m/min between a 0 mm and a 1 500 mm head from the test block. This shall be used only if opening pressures and flow/pressure drop data are required.

NOTE 1 Graphical symbols used in figures 1 to 3 are in accordance with ISO 1219-1[1].

The test rig shall comprise the following components together with necessary tubing, connectors and supports.

- Oil reservoir.
- Pump (vane type recommended).

- c) Screen filter.
- d) Stop cocks (see figures 1 to 3).
- e) 3-way valves (see figures 1 to 3).
- f) Test mounting block.
- g) Header tank (e.g. a separating funnel).
- h) Measuring cylinders.
- i) Stopwatch or clock (not shown).

If it is required to carry out all tests specified in this document, then a single test rig incorporating the features of figures 1 to 3 may be used.

6 Test liquid

The test liquid shall be mineral oil used at a kinematic viscosity of $8 \text{ mm}^2/\text{s} \pm 2 \text{ mm}^2/\text{s}$ ¹⁾ at 20 °C (viscosity class ISO VG 5[2]).

7 Test procedure

Two test procedures for both inlet and outlet anti-drain valves are described. Test A covers the essential basic performance of the valve in terms of its function as an anti-drain feature. Test B covers the basic performance test and additional procedures suggested to ascertain supplementary performance data which may be required.

7.1 Inlet anti-drain valve — Test A: Basic performance test

See figure 1.

NOTE 2 If the filter incorporates an outlet anti-drain valve then, prior to testing, this valve should be locked open by a suitable means, to permit entry of oil on the outlet side of the filter.

7.1.1 Carry out the test at an ambient temperature of $25 \text{ °C} \pm 5 \text{ °C}$.

7.1.2 Fit the test mounting block **6** into the test rig in an inverted position (i.e. 180° from the position shown in figure 1).

7.1.3 Assemble the filter to be tested on the mounting block using a suitable gasket to prevent leakage through the thread.

1) $1 \text{ mm}^2/\text{s} = 1 \text{ cSt}$.

NOTE 3 If the object of this test is to assess the performance of the valve only and not the integrity of the filter assembly as a whole, the potential leak path between the threaded mounting plate and the gasket retainer should also be sealed off.

7.1.4 Open the inlet cock **4** to the filter and the outlet cock **8** in the base of the header tank **9**.

7.1.5 Pump test liquid into the system until all air is expelled and a $600 \text{ mm} \pm 10 \text{ mm}$ head is obtained above the base of the filter, then close the inlet cock **4** and the outlet cock **8** in the base of the header tank **9**.

NOTE 4 The filter is installed in the position described in order to achieve a more complete expulsion of air.

7.1.6 Disconnect the inlet pipe at the base of the filter and turn the filter through 180°, into the position shown in figure 1.

7.1.7 Open the outlet cock **8** at the base of the header tank **9** and remove the bleed screw from the test mounting block. Leave for 5 min to drain surplus test liquid from the test mounting block.

7.1.8 Replace the bleed screw and place a suitable measuring cylinder **10** beneath the outlet pipe, and start the stopwatch.

7.1.9 Leave for a test time of 3 h and measure the amount of test liquid that leaked from the filter in this time.

7.1.10 Maintain the level of test liquid contained in the header tank at $600 \text{ mm} \pm 10 \text{ mm}$.

7.1.11 Record the results (see clause 8).

7.2 Inlet anti-drain valve — Test B: Basic and supplementary performance test

See figure 3 and note 2.

NOTES

5 This test may be used if flow/pressure drop and opening pressure is required.

6 If necessary the test may be repeated for the following conditions:

- a) with the filter in a position other than vertical. The angle should be agreed between the purchaser and the manufacturer;

- b) after submitting the filter to an ageing test in accordance with ISO 4548-3^[3] in vertical and inclined positions.

7.2.1 Carry out the test at a temperature of $25\text{ °C} \pm 5\text{ °C}$.

7.2.2 Fit the test mounting block **8** into the test rig in an inverted position (i.e. 180° from the test position shown in figure 3).

7.2.3 Assemble the filter to be tested on the mounting block using a suitable gasket to prevent leakage through the thread.

7.2.4 Open the inlet cock **4** and the outlet cock **11**. Set 3-way valves **5**, **6** and **10** to permit oil flow through the filter and return via the header tank **12**.

7.2.5 Start the pump **2** and adjust the inlet cock **4** to allow oil through the filter at sufficient flow rate to open the anti-drain valve and flow until oil is free from air bubbles. See note 4 in 7.1.5.

7.2.6 Stop the pump **2** and close cocks **4** and **11** and adjust valve **6** such that the inlet to the mounting block is closed.

7.2.7 Adjust the position of the header tank to obtain a $600\text{ mm} \pm 10\text{ mm}$ head, or such head as may be otherwise specified. Turn the filter through 180° , into the position shown in figure 3.

Adjust valve **5** to supply oil to the header tank only, open the inlet cock **4** and start the pump to maintain the oil level in the header tank.

7.2.8 Open cocks **11** and **13**. Drain the oil downstream of the inlet anti-drain valve into a suitable container (not **15**) and leave for 5 min to drain surplus test liquid from the mounting block.

7.2.9 Place the measuring cylinder **15** under the line from drain cock **13** and simultaneously start the stopwatch.

7.2.10 Allow to drain for 3 h into the measuring cylinder **15** and measure the quantity of oil leaked through the inlet anti-drain valve.

7.2.11 Close drain cock **13** and record the results (see clause 8).

7.2.12 Lower the header tank **12** to reduce the head to approximately zero.

7.2.13 Adjust valves **10** and **6** such that flow from the header tank is diverted to the inlet of the mounting block.

7.2.14 Open drain cock **14** and allow to drain for 5 min into a suitable container (not **16**).

7.2.15 Progressively raise the header tank until flow is seen at the drain cock **14** indicating that the inlet anti-drain valve is opening. Note the head at that point. Reduce the head again to valve closure. Place a clean measuring cylinder **16** in position.

7.2.16 Raise the header tank at a rate of 0,5m/min, increasing the head until the observed valve opening pressure is reached, indicated by flow commencing through the drain cock **14**. Record the head at that point.

7.2.17 Raise the header tank to the next 100 mm point at a rate of 0,5 m/min. Allow the flow to stabilize for 2 min. Place a clean measuring cylinder **16** under drain cock **14** and simultaneously start the stopwatch and measure the flow rate. Repeat the procedure after each 100 mm increase in head up to 1 500 mm.

7.2.18 Plot a curve of flow rate versus head. Derive the valve opening pressure from this curve at the flow rate of 0,05 l/min.

7.3 Outlet anti-drain valve — Test A: Basic performance test

See figure 2.

NOTE 7 If the filter incorporates an inlet anti-drain valve then, prior to testing, this valve should be locked open by a suitable means, to permit entry of oil on the inlet side of the filter.

7.3.1 Carry out the procedures described in 7.1.1 to 7.1.3.

7.3.2 Close the outlet cock **7**, open the inlet cock **4** and the drain cock **10**, and start the pump **2**. Let oil flow through the filter until all air is expelled. See note 4 in 7.1.5.

7.3.3 Close the drain cock **10** and turn the filter through 180° , into the position shown in figure 2.

7.3.4 Open the outlet cock **7** to fill the header tank **8** to a head of $150\text{ mm} \pm 10\text{ mm}$, or such head as may be otherwise specified.

7.3.5 Close the inlet cock **4** and stop the pump.

7.3.6 Open the drain cock **10** and allow the mounting block to drain for 5 min.

7.3.7 Place a measuring cylinder **11** under the drain cock **10** and simultaneously start the stopwatch.

7.3.8 Leave for a test time of 3 h and measure the amount of test liquid leaked from the filter in this time.

7.3.9 Maintain the level of test liquid contained in the header tank at $150 \text{ mm} \pm 10 \text{ mm}$, or such head as otherwise specified (see 7.3.4).

7.3.10 Record the results (see clause 8).

7.4 Outlet anti-drain valve — Test B: Basic and supplementary performance test

See figure 3 and notes 5, 6 and 7.

7.4.1 Carry out the procedures described in 7.2.1 to 7.2.6.

7.4.2 Adjust the position of the header tank to obtain $1\,500 \text{ mm} \pm 10 \text{ mm}$ head, or such head as may be otherwise specified. Turn the filter through 180° into the position shown in figure 3.

7.4.3 Adjust valves **6** and **10** and open the outlet cock **11** to direct the oil flow from the header tank **12** to the filter inlet. Open the drain cock **14**.

7.4.4 Drain the oil downstream of the outlet anti-drain valve into a suitable container (not **16**) and leave for 5 min to drain surplus test liquid from the mounting block.

7.4.5 Place a measuring cylinder **16** under the line from the drain cock **14** and simultaneously start the stopwatch.

7.4.6 Allow to drain for 3 h into the measuring cylinder **16** and measure the quantity of oil leaked through the outlet and anti-drain valve.

7.4.7 Close the drain cock **14** and record the results (see clause 8).

7.4.8 Lower the header tank **12** to reduce the head to approximately zero. Open the drain cock **14**.

7.4.9 Progressively raise the header tank until flow is seen at the drain cock **14** indicating the outlet anti-drain valve is opening. Reduce the head again until the valve closes. Place a clean measuring cylinder **16** in position.

7.4.10 Raise the header tank at a rate of $0,5 \text{ m/min}$, increasing the head until the observed outlet anti-drain valve opening pressure is reached, indicated by flow commencing through the drain cock **14**. Record the head at that point.

7.4.11 Raise the header tank to the next 100 mm point at a rate of $0,5 \text{ m/min}$. Allow flow to stabilize for 2 min. Place a clean measuring cylinder **16** under the drain cock **14** and simultaneously start the stopwatch and measure the flow rate. Repeat the procedure after each 100 mm increase in head up to $1\,500 \text{ mm}$.


7.4.12 Plot a curve of flow rate versus head. Derive the valve opening pressure from this curve at the flow rate of $0,05 \text{ l/min}$.

8 Test report

The test report shall include the following:

- a) a reference to this part of ISO 4548;
- b) the name of the test establishment;
- c) the filter type (manufacturer, model number and batch number);
- d) the date of test;
- e) the test temperature;
- f) the amount of test liquid leaked from the filter, in litres and the corresponding head (see 7.1.9 and/or 7.3.8);
- g) the derived valve opening pressure, if applicable, in bars (see 7.2.18 and/or 7.4.12);
- h) curves of flow rate versus head, if applicable.

Dimensions in millimetres

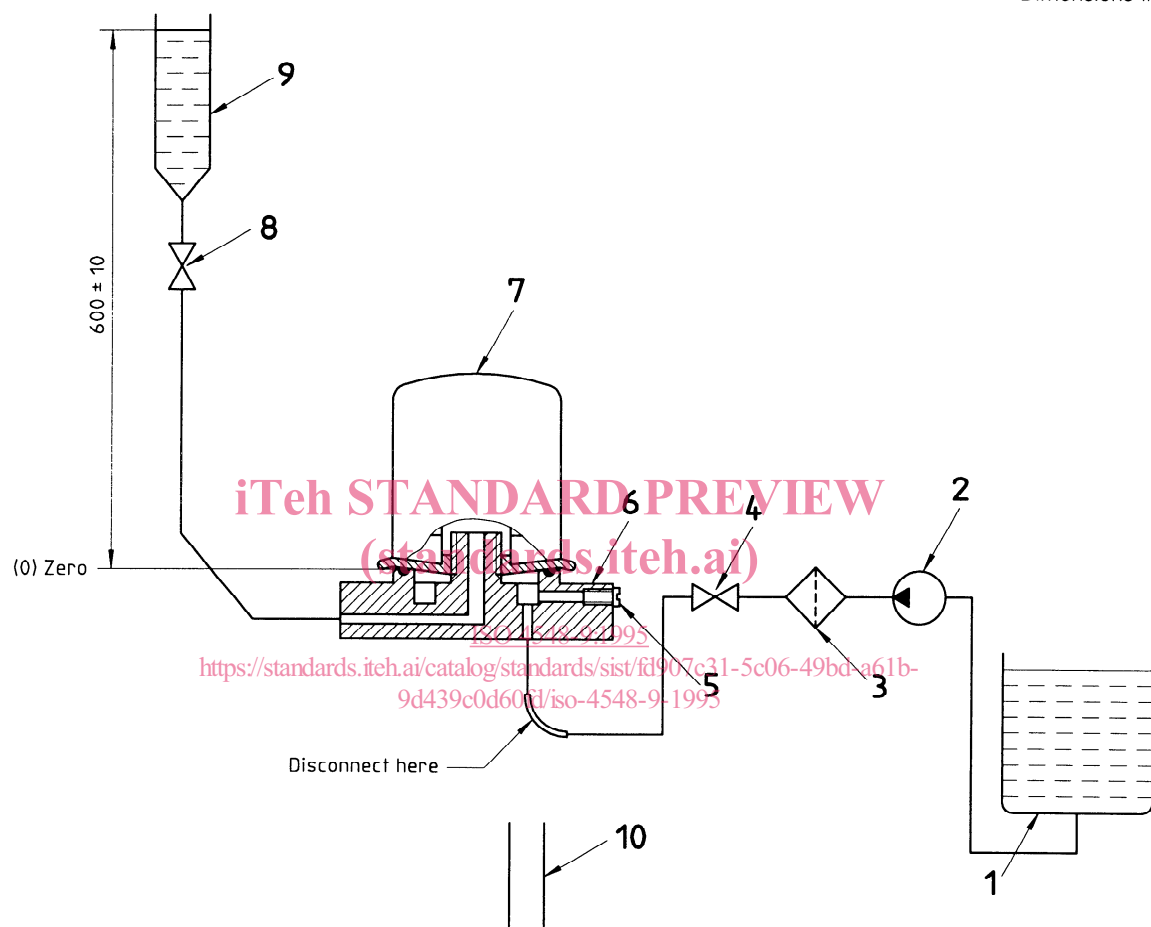

- | | |
|-----------------|-----------------------|
| 1 Oil reservoir | 6 Test mounting block |
| 2 Pump | 7 Filter to be tested |
| 3 Screen filter | 8 Outlet cock |
| 4 Inlet cock | 9 Header tank |
| 5 Bleed screw | 10 Measuring cylinder |

Figure 1 — Test rig for inlet anti-drain valve