

INTERNATIONAL STANDARD



**Lightning protection system components (LPSC) –
Part 5: Requirements for earth electrode inspection housings and earth
electrode seals** (<https://standards.iteh.ai>)

Document Preview

[IEC 62561-5:2023](https://standards.iteh.ai/catalog/standards/iec/facedcb4-85fa-4101-a916-b3b0d63b9774/iec-62561-5-2023)

<https://standards.iteh.ai/catalog/standards/iec/facedcb4-85fa-4101-a916-b3b0d63b9774/iec-62561-5-2023>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2023 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

International Standards
Document Preview

[IEC 62561-5:2023](https://standards.iteh.ai/catalog/standards/iec/facedcb4-85fa-4101-a916-b3b0d63b9774/iec-62561-5-2023)

<https://standards.iteh.ai/catalog/standards/iec/facedcb4-85fa-4101-a916-b3b0d63b9774/iec-62561-5-2023>



IEC 62561-5

Edition 3.0 2023-12
REDLINE VERSION

INTERNATIONAL STANDARD



Lightning protection system components (LPSC) –
Part 5: Requirements for earth electrode inspection housings and earth
electrode seals

Document Preview

[IEC 62561-5:2023](https://standards.iteh.ai/catalog/standards/iec/facedcb4-85fa-4101-a916-b3b0d63b9774/iec-62561-5-2023)

<https://standards.iteh.ai/catalog/standards/iec/facedcb4-85fa-4101-a916-b3b0d63b9774/iec-62561-5-2023>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.020, 91.120.40

ISBN 978-2-8322-7963-2

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	2
1 Scope.....	7
2 Normative references	7
3 Terms and definitions	7
4 Classification.....	8
4.1 Earth electrode inspection housings.....	8
4.2 Earth electrode seals	8
5 Requirements	8
5.1 General.....	8
5.2 Documentation and installation instructions	8
5.3 Marking.....	8
5.3.1 Content of marking	8
5.3.2 Durability and legibility.....	9
5.4 Earth electrode inspection housing	8
5.5 Earth electrode seal.....	9
6 Tests	9
6.1 General test conditions	9
6.2 Documentation and installation instructions	10
6.2.1 General conditions.....	10
6.2.2 Acceptance criteria	10
6.3 Marking test.....	10
6.3.1 General test conditions for tests	10
6.3.2 Acceptance criteria	10
6.4 Earth electrode inspection housing	10
6.4.1 General test conditions.....	10
6.4.2 Load test	10
6.4.3 Acceptance criteria	12
6.5 Earth electrode seal test	13
6.5.1 Earth electrode in watertight housing.....	13
6.5.2 Earth electrode in or through watertight concrete.....	14
7 Electromagnetic compatibility (EMC)	16
8 Structure and content of the test report.....	17
8.1 General.....	17
8.2 Report identification	17
8.3 Specimen description.....	17
8.4 Standards and references	18
8.5 Test procedure.....	18
8.6 Testing equipment, description	18
8.7 Measuring instruments description.....	18
8.8 Results and parameters recorded	18
8.9 Statement of pass or fail	18
Annex A (normative) Applicability of previous tests	19
Bibliography.....	20
Figure 1 – Test arrangement of the first alternative for load test	11

Figure 2 – Test arrangement of the second alternative for load test	12
Figure 3 – Test arrangement for sealing test.....	14
Figure 4 – Example of a test arrangement for depth of penetration of water under pressure	16
Table 1 – Parameters for concrete used for the test arrangement	15
Table A.1 – Differences in the requirements for earth electrode inspection housings and earth electrode seals complying with IEC 62561-5:2011 or IEC 62561-5:2017.....	19

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[IEC 62561-5:2023](#)

<https://standards.iteh.ai/catalog/standards/iec/facedcb4-85fa-4101-a916-b3b0d63b9774/iec-62561-5-2023>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

LIGHTNING PROTECTION SYSTEM COMPONENTS (LPSC) –**Part 5: Requirements for earth electrode inspection housings
and earth electrode seals**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition IEC 62561-5:2017. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

IEC 62561-5 has been prepared by IEC technical committee 81: Lightning protection. It is an International Standard.

This third edition cancels and replaces the second edition published in 2017. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) A classification of earth electrode seals has been added.

The text of this International Standard is based on the following documents:

Draft	Report on voting
81/738/FDIS	81/753/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 62561 series, published under the general title *Lightning protection system components (LPSC)*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This part of IEC 62561 deals with the requirements and tests for lightning protection system components (LPSC), specifically earth electrode inspection housings and earth electrode seals, used for the installation of a lightning protection system (LPS) designed and implemented according to the IEC 62305 series [1]¹.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[IEC 62561-5:2023](#)

<https://standards.iteh.ai/catalog/standards/iec/facedcb4-85fa-4101-a916-b3b0d63b9774/iec-62561-5-2023>

¹ Numbers in square brackets refer to the Bibliography.

LIGHTNING PROTECTION SYSTEM COMPONENTS (LPSC) –

Part 5: Requirements for earth electrode inspection housings and earth electrode seals

1 Scope

This part of IEC 62561 specifies the requirements and tests for earth electrode inspection housings (earth housings) installed in the earth and for earth electrode seals.

Lightning protection system components (LPSC) can also be suitable for use in hazardous atmospheres. For this reason, there are additional requirements when installing the components under such conditions.

NOTE Different requirements and test procedures are given in the EN 124 series [2] and the EN 1253 series [3].

2 Normative references

~~The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.~~

~~IEC 62305-3, Protection against lightning – Part 3: Physical damage to structures and life hazard~~

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

earth electrode inspection housing

metallic or non-metallic enclosure that houses the down conductor and earth termination connection for inspection and testing purposes and consists of a housing and a removable lid

3.2

earth electrode seal

water pressure seal used in conjunction with an earth electrode that passes through or enters the foundation or wall of the building, preventing ground water from entering the building

3.3

earth electrode

part or group of parts of the earth termination system which provides direct electrical contact with and disperses the lightning current to the earth

EXAMPLE Earth rods, earth conductors and earth plates.

4 Classification

4.1 Earth electrode inspection housings

Earth electrode inspection housings are classified according to the ability to withstand load stress as follows:

- a) class H, heavy duty usage for slow moving vehicular traffic, multi-axle, etc;
- b) class M, medium duty usage for slow moving automobiles, etc;
- c) class L, light duty usage for walkways, etc.

4.2 Earth electrode seals

~~No classifications.~~

Earth electrode seals are classified according to the medium in contact with the earth electrode, as follows:

- a) earth electrode in watertight housing;
- b) earth electrode through watertight concrete.

5 Requirements

5.1 General

All earth electrode inspection housings and earth electrode seals shall be designed and constructed so that, in normal use according to the manufacturer's or supplier's instructions, their performance ~~is reliable and without danger to persons and the surroundings~~ shall be reliable, stable and safe to persons and surrounding equipment.

<https://standards.iteh.ai/IEC/62561-5/2023>

The choice of a material depends on its ability to match the particular application requirements.

5.2 Documentation and installation instructions

The manufacturer or supplier of the earth electrode inspection housing and earth electrode seals shall provide adequate information in their literature to ensure that the installer can select and install the materials in a suitable and safe manner, ~~in accordance with IEC 62305-3.~~

The literature shall contain at least the following information:

- a) classification as per Clause 4;
- b) load withstand force for earth electrode inspection housings in kN;
- c) installation instructions.

Compliance is checked by review in accordance with 6.2.

5.3 Marking

5.3.1 Content of marking

All products complying with this document shall be marked at least with:

- a) the manufacturer's or responsible vendor's name or trade mark ~~or identifying symbol~~;
- b) part number or identifying symbol;
- c) classification as per Clause 4;

d) load withstand force for earth electrode inspection housings in kN.

Where this proves to be impractical, the marking in accordance with ~~the identifying symbol b), c) and d)~~ may be given on the smallest packing unit.

Compliance is checked in accordance with 6.3.

NOTE Marking can be applied for example by moulding, pressing, engraving, and printing ~~adhesive labels or water slide transfers~~.

5.3.2 Durability and legibility

Compliance is checked in accordance with 6.3.

5.4 Earth electrode inspection housing

The design of the earth electrode inspection housing shall be such that it carries out its function of enclosing the down conductor ~~and~~ and earth rod termination in an acceptable and safe manner, and has sufficient internal dimensions to permit the assembly ~~or~~ or disassembly of the earth rod clamp. The housing body shall be deep enough to permit the lid to sit flush on the body without interfering with the rod ~~or~~ or conductor ~~or~~ or clamp assembly.

The material of the earth electrode inspection housing shall be compatible with its surrounding environment, i.e. in terms of load rating, and shall comply with the tests given in 6.4.

5.5 Earth electrode seal

The design of the earth electrode seal shall be such that, in an acceptable and safe manner, it carries out its function of preventing ground water bypassing the earth electrode and entering the foundation or the ~~basement or~~ a wall of a building.

The material of the earth electrode seal shall be compatible with its surrounding environment and comply with the tests given in 6.5. [EC 62561-5:2023](https://standards.iteh.ai/catalog/standards/iec/facedcb4-85fa-4101-a916-b3b0d63b9774/iec-62561-5-2023)

<https://standards.iteh.ai/catalog/standards/iec/facedcb4-85fa-4101-a916-b3b0d63b9774/iec-62561-5-2023>

6 Tests

6.1 General ~~test conditions~~

The tests in accordance with this document are type tests. These tests are of such a nature that, after they have been performed, it is not necessary for these tests to be repeated unless changes are made to the materials, design or type of manufacturing process, which ~~might~~ can change the performance characteristics of the product.

Tests are carried out with the specimens prepared as in normal use according to the manufacturer's or supplier's instructions, unless otherwise specified.

All tests are carried out on new specimens.

Three new specimens are subjected to the tests and the requirements are satisfied if all the tests are met. If only one of the specimens does not satisfy a test due to an assembly or a manufacturing fault, that test and any preceding one which ~~may~~ can have influenced the results of the test shall be repeated. The tests which follow shall be carried out in the required sequence on another full set of specimens, all of which shall comply with the requirements, unless otherwise specified.

The applicant, when submitting the first set of samples, can also submit an additional set of samples that ~~may~~ can be necessary should one sample fail. The testing laboratory shall then, without further request, test the additional set of samples, and shall only reject if a further failure

occurs. If the additional set of samples is not submitted at the same time, a failure of one sample shall entail rejection.

For products already tested according to IEC 62561-5:2011 and IEC 62561-5:2017, the applicability of previous tests according to Annex A, Table A.1 can be applied.

For new products, complete type tests and samples according to Clause 6 are required.

6.2 Documentation and installation instructions

6.2.1 General conditions ~~for tests~~

The content of the installation instructions is checked as per its completeness by ~~inspection review~~.

6.2.2 Acceptance criteria

~~Installation instructions are deemed to have passed the test if they contain at least the following:~~

- ~~— the manufacturer's or responsible vendor's name or trade mark or identifying symbol;~~
- ~~— part number;~~
- ~~— classification as per Clause 4;~~
- ~~— load withstand force in kN.~~

Documentation or installation instructions are deemed to be acceptable if they contain at least the information given in 5.2.

6.3 Marking test

6.3.1 General test conditions ~~for tests~~

~~The marking shall be inspected after rubbing it by hand for 15 s with a piece of cloth soaked with water, followed by rubbing it with another piece of cloth soaked with white spirit for 15 s.~~

The marking is checked:

- a) as per its completeness in accordance with 5.3.1 by review;
- b) as per its durability and legibility by rubbing it by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with white spirit or mineral spirit.

NOTE Marking made by moulding, pressing or engraving is not subjected to the test of 6.3.1 b).

6.3.2 Acceptance criteria

The specimen is deemed to have passed the test if:

- a) the marking contains all information of 5.3.1;
- b) after the test of 6.3.1 b) the marking remains legible.

6.4 Earth electrode inspection housing

6.4.1 General test conditions

All tests shall be performed on three new lid specimens using one housing.

6.4.2 Load test

Concrete lid and concrete housing specimens shall be tested after a 28 day curing period. Lid specimens of all other materials shall be tested after a seven day curing period.

The test is carried out on a complete assembly and prepared according to the manufacturer's instructions.


a) First alternative load test

The housing of the specimen shall be surrounded by a material relevant to a declared load rating in accordance with the manufacturer's instructions.

The thickness of the surrounding material shall be at least 0,5 times the nominal external size of the housing and not greater than the nominal size of the housing or can be reduced as specified by the manufacturer.

The arrangement should be placed on a rigid support.

An example for the test arrangement is shown in Figure 1.

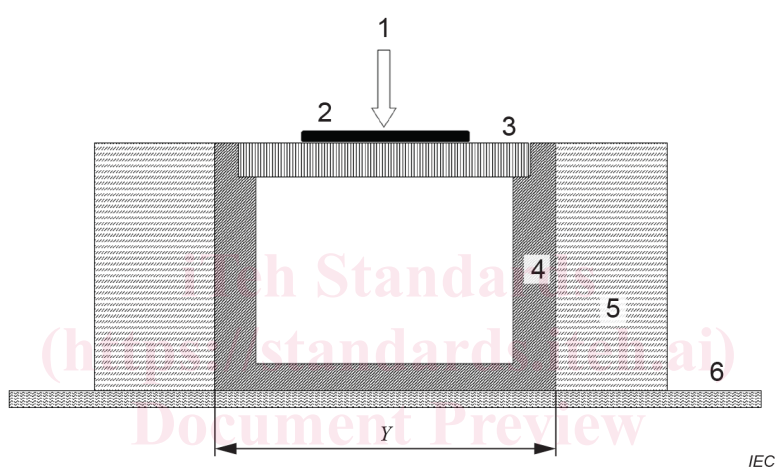

Key

1 force

2 circular steel plate

3 removable lid

4 housing

5 surrounding material

6 rigid support

Y nominal size

The thickness of the surrounding material (5) is usually equal to $0,5 \times Y$ up to $1 \times Y$. It can be reduced as specified by the manufacturer.


Figure 1 – Test arrangement of the first alternative for load test

b) Second alternative load test

The housing of the specimen shall be confined within steel plates with a minimum thickness of 10 mm, according to the manufacturer's instructions, held together by suitable means for example using threaded rods, fasteners.

The arrangement should be placed on a rigid support.

An example of the second alternative of the load test is shown in Figure 2.

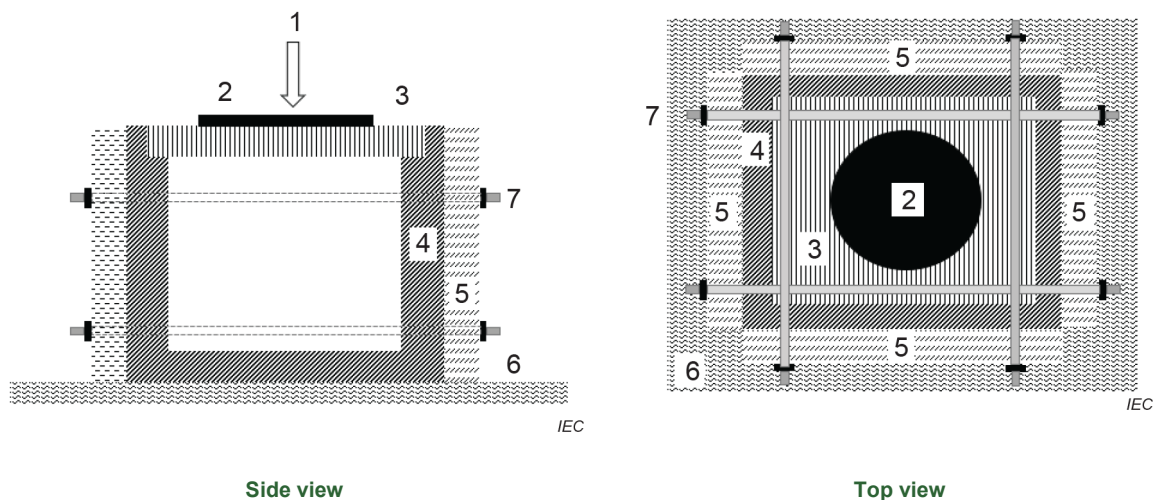

Key

- 1 force
- 2 circular steel plate
- 3 removable lid
- 4 housing
- 5 steel plates
- 6 rigid support
- 7 threaded rod

Figure 2 – Test arrangement of the second alternative for load test

The product applicable for heavy duty usage, class H (slow moving vehicular traffic, multi-axle, etc.) shall be subjected to a force of 30 kN vertically applied through a circular steel plate with a $(170 \pm 0,5)$ mm diameter and a thickness of (20 ± 1) mm with a radius of both edges (top and bottom) of **minimum** approximately 2 mm.

The product applicable for medium duty usage, class M (slow moving automobiles, etc.) shall be subjected to a force of 15 kN vertically applied through a circular steel plate with a $(130 \pm 0,5)$ mm diameter and a thickness of (20 ± 1) mm with an edge radius of approximately 2 mm.

The product applicable for light duty usage, class L (walkways, etc.) shall be subjected to a force of 4 kN vertically applied through a circular steel plate with a $(62 \pm 0,5)$ mm diameter and a thickness of (20 ± 1) mm with an edge radius of approximately 2 mm.

The centre of the circular plate should be positioned over the centre of the lid.

The force shall be gradually applied over (60 ± 10) s and maintained for (120 ± 5) s.

The tested load of the product should be declared by the manufacturer.

6.4.3 Acceptance criteria

After the test, the specimens shall show no signs of disintegration, nor crack be visible to normal or corrected vision without additional magnification. One minute after the load has been removed, there shall be no permanent deformation exceeding 3 mm.

The specimens are deemed to have passed the tests if all specimens meet the above requirements.