

SLOVENSKI STANDARD SIST EN 301 489-11 V1.1.1:2003

01-marec-2003

9`Y_lfca U[bYlbUnXfi ÿ`1]j cghf9A7Ł]b`nUXYj Y`j`nj Yn]`n`fUX]'g_]a `gdY_lfca `f9FAŁ! GHJbXUfX`Y`Y_lfca U[bYlbY`nXfi ÿ`1]j cgh]`f9A7Ł`nUfUX]'g_c`cdfYa c`]b`ghcf]hj Y'!`%\"XY`. DcgYVb]`dc[c1]`nUcXXU'b]_Y`j `ghcf]hj]`UbUc[bY`df]nYa bY`nj c_cj bY fUX]cX]Z n]'Y`fUa d`]hi XbUa cXi `UW]'U`f5AŁ`]b`ZfY_j Yb bUa cXi `UW]'U`f1 AŁL

Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 11: Specific conditions for analogue terrestrial sound broadcasting (Amplitude Modulation (AM) and Frequency Modulation (FM)) service transmitters.

(standards.iteh.ai)

<u>SIST EN 301 489-11 V1.1.1:2003</u> https://standards.iteh.ai/catalog/standards/sist/e8671aed-16b2-4e01-90fe-add6fcb0737c/sist-en-301-489-11-v1-1-1-2003

Ta slovenski standard je istoveten z: EN 301 489-11 Version 1.1.1

ICS:

33.060.20	Sprejemna in oddajna oprema	Receiving and transmitting equipment
33.100.01	Elektromagnetna združljivost na splošno	Electromagnetic compatibility in general
33.170	Televizijska in radijska difuzija	Television and radio broadcasting

SIST EN 301 489-11 V1.1.1:2003 en

SIST EN 301 489-11 V1.1.1:2003

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST EN 301 489-11 V1.1.1:2003</u> https://standards.iteh.ai/catalog/standards/sist/e8671aed-16b2-4e01-90fe-add6fcb0737c/sist-en-301-489-11-v1-1-1-2003

ETSI EN 301 489-11 V1.1.1 (2002-05)

Candidate Harmonized European Standard (Telecommunications series)

Electromagnetic compatibility
and Radio spectrum Matters (ERM);
ElectroMagnetic Compatibility (EMC) standard
for radio equipment and services;
Part 11: Specific conditions for analogue terrestrial sound
broadcasting (Amplitude Modulation (AM) and
Frequency Modulation (FM)) service transmitters

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 301 489-11 V1.1.1:2003 https://standards.iteh.ai/catalog/standards/sist/e8671aed-16b2-4e01-90fe-add6fcb0737c/sist-en-301-489-11-v1-1-1-2003



Reference

REN/ERM-EMC-225-11

Keywords

broadcast, EMC, radio, regulation, testing, VHF

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

(standards.iteh.ai)

SIST EN 301 489-11 V1.1.1:2003

https://standards.iteh.ai/catalog/standards/sist/e8671aed-16b2-4e01-90fe-add6fcb0737/mRectant | notice|

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, send your comment to: editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2002. All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members. **TIPHON**TM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members. **3GPP**TM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Histo	ry	18
	ex C (informative): The EN title in the official languages	
Anne	ex B (informative): Bibliography	16
A.2	FM sound broadcasting transmitters	15
A.1	AM sound broadcasting transmitters	15
Anne	ex A (informative): Types of broadcasting service equipment covered by the present document	
7.2.2	Special conditions	14
7.2.1	General	
7.2	Immunity	
7.1.1	Special conditions	
7.1 7.1.1	Emission	
7	Applicability overview	
6.2	Performance criteria for Transient phenomena applied to Transmitters (TT)	
6.1	Performance criteria for Continuous phenomena applied to Transmitters (CT)	
6	Performance criteria	
5.5	Equipment classification	11
5.4	Ancillary equipment	11
5.3	Equipment which does not provide a continuous communication link as a broadcasting transmission	11
5.1 5.2	Equipment which can provide a continuous communication link as a broadcasting transmission	
5 5 1	Performance assessment. General SIST EN 301 489-11 V1.1.12003	11
4.5		
4.4	Narrow band responses of receivers Normal test modulation (Standards.iteh.ai)	10
4.3.3	Active deflector exclusion band. Transposer exclusion bands	10
4.3.2		
4.3.1 4.3.1.2	r r	
4.3.1 4.3.1.1	Transmitter and RF power amplifier exclusion band	
4.3	RF exclusion bands	
	power amplifiers	
4.2.2	Arrangements for test signals at the input of transposers, active deflectors, or RF power amplifiers Arrangements for test signals at the output of transmitters, transposers, active deflectors or RF	
4.2.1 4.2.2	Arrangements for test signals at the input of transmitters	
4.2	Arrangements for test signals	
4.1	General	
4	Test conditions	
3.2	Abbreviations	
3 3.1	Definitions and abbreviations	
2	References	
1	Scope	6
Forev	vord	4
Intelle	ectual Property Rights	∠

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Council Directive on the approximation of the laws of the Member States relating to electromagnetic compatibility ("the EMC Directive") (89/336/EEC [2] as amended) and Directive 1999/5/EC [3] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive" [3]).

The present document is part 11 of a multi-part deliverable covering Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services, as identified below:

- Part 1: "Common technical requirements," //c/sist-en-301-489-11-v1-1-1-2003
- Part 2: "Specific conditions for radio paging equipment";
- Part 3: "Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 40 GHz":
- Part 4: "Specific conditions for fixed radio links and ancillary equipment and services";
- Part 5: "Specific conditions for Private land Mobile Radio (PMR) and ancillary equipment (speech and non-speech)";
- Part 6: "Specific conditions for Digital Enhanced Cordless Telecommunications (DECT) equipment";
- Part 7: "Specific conditions for mobile and portable radio and ancillary equipment of digital cellular radio telecommunications systems (GSM and DCS)";
- Part 8: "Specific conditions for GSM base stations";
- Part 9: "Specific conditions for wireless microphones, similar Radio Frequency (RF) audio link equipment, cordless audio and in-ear monitoring devices";
- Part 10: "Specific conditions for First (CT1 and CT1+) and Second Generation Cordless Telephone (CT2) equipment";
- Part 11: "Specific conditions for analogue terrestrial sound broadcasting (Amplitude Modulation (AM) and Frequency Modulation (FM)) service transmitters";
- Part 12: "Specific conditions for Very Small Aperture Terminal, Satellite Interactive Earth Stations operated in the frequency ranges between 4 GHz and 30 GHz in the Fixed Satellite Service (FSS)";
- Part 13: "Specific conditions for Citizens' Band (CB) radio and ancillary equipment (speech and non-speech)";

5

ETSI EN 301 489-11 V1.1.1 (2002-05)

- Part 14: "Specific conditions for analogue and digital terrestrial TV broadcasting service transmitters";
- Part 15: "Specific conditions for commercially available amateur radio equipment";
- Part 16: "Specific conditions for analogue cellular radio communications equipment, mobile and portable";
- Part 17: "Specific conditions for Wideband data and HIPERLAN equipment";
- Part 18: "Specific conditions for Terrestrial Trunked Radio (TETRA) equipment";
- Part 19: "Specific conditions for Receive Only Mobile Earth Stations (ROMES) operating in the 1,5 GHz band providing data communications";
- "Specific conditions for Mobile Earth Stations (MES) used in the Mobile Satellite Services (MSS)"; Part 20:
- "Specific conditions for ground based VHF aeronautical mobile and fixed radio equipment"; Part 22:
- Part 23: "Specific conditions for IMT-2000 CDMA Direct Spread (UTRA) Base Station (BS) radio, repeater and ancillary equipment";
- Part 24: "Specific conditions for IMT-2000 CDMA Direct Spread (UTRA) for Mobile and portable (UE) radio and ancillary equipment";
- "Specific conditions for IMT-2000 CDMA Multi-carrier Mobile Stations and ancillary equipment"; Part 25:
- Part 26: "Specific conditions for IMT-2000 CDMA Multi-carrier Base Stations and ancillary equipment".

National transposition dates

Date of adoption of this EN:

Date of latest announcement of this EN (doa):

3 May 2002 31 August 2002

Date of latest publication of new National Standard 301 489-11 V1.1.1.2003 or endorsement of this ENI(dop/e)ndards.iteh.ai/catalog/standards/sist/e8671aed-16b2-28/February 2003

add6fcb0737c/sist-en-301-489-11-v1-1-1-2003 Date of withdrawal of any conflicting National Standard (dow): 29 February 2004

1 Scope

The present document, together with EN 301 489-1 [1], covers the assessment of analogue transmitters, exciters, and any associated ancillary equipment dedicated for radio broadcasting services, in respect of ElectroMagnetic Compatibility (EMC).

Technical specifications related to the antenna port emissions and cabinet radiation are not included in the present document. Such technical specifications are found in the relevant product standards of ETSI for the effective use of the radio spectrum.

The present document specifies the applicable test conditions, performance assessment and performance criteria for analogue terrestrial sound broadcasting transmitters and their associated ancillary equipment.

Definitions of the type of broadcast transmitters and exciters covered by the present document are given in annex A.

In case of differences (for instance concerning special conditions, definitions, abbreviations) between the present document and EN 301 489-1 [1], the provisions of the present document take precedence.

The environmental classification and the emission and immunity requirements used in the present document are as stated in EN 301 489-1 [1], except for any specific conditions included in the present document, under which broadcast service transmitters are typically used.

The present document may not cover those cases where a potential source of interference which is producing individually repeated transient phenomena or a continuous phenomenon is permanently present, e.g. a radar site in the near vicinity. In such a case it may be necessary to use special protection applied to either the source of interference or the interfered part or both. **iTeh STANDARD PREVIEW**

(standards.iteh.ai)

2 References

document.

The following documents contain provisions which, through reference in this text, constitute provisions of the present

- add6fcb0737c/sist-en-301-489-11-v1-1-1-2003
 References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- [1] ETSI EN 301 489-1 (2000): "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements".
- [2] Council Directive 89/336/EEC of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility.
- [3] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity.
- [4] EN 55011 (1998): "Industrial, scientific and medical (ISM) radio-frequency equipment Radio disturbance characteristics Limits and methods of measurement".
- [5] EN 61000-4-3 1996/A1: "998: "Electromagnetic compatibility (EMC) Part 4-3: Testing and measurement techniques Radiated, radio-frequency, electromagnetic field immunity test".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in EN 301 489-1 [1] and the following apply:

broadcasting service: radiocommunication service in which the transmissions are intended for direct reception by the general public

NOTE: This service may include sound transmission, television transmission, or other types of transmission.

transposer: Tx/Rx (transceiver), which receives an input signal off-air, and re-broadcasts the same signal on a different frequency

active deflector: Tx/Rx (transceiver, repeater, gap filler), which receives an input signal off-air, and re-broadcasts the same signal on the same frequency

RF power amplifier: Tx, which comprises an amplifier, declared by the manufacturer to be capable of being connected to a terrestrial broadcasting antenna system

exciter: low level RF power driver stage of a broadcasting transmitter

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

	Alternating Current	$\mathbf{A}^{\prime}\mathbf{I}^{\prime}\mathbf{A}$	NDARD	PREA	/
AC	Alternating Current				

AM Amplitude Modulation tandards.iteh.ai)

BER Bit Error Ratio

CISPR International Special Committee on Radio Interference
CT Continuous phenomena applied to Transmitters 12003

DC Direct Out femp dards. iteh. ai/catalog/standards/sist/e8671 aed-16b2-4e01-90fe-

EMC ElectroMagnetic Compatibilityist-en-301-489-11-v1-1-1-2003

EUT Equipment Under Test FM Frequency Modulation HF High Frequency

IF Intermediate Frequency

LF Low Frequency
MF Medium Frequency
RDS Radio Data System
RF Radio Frequency

Rx Receiver

SNR Signal to Noise Ratio

TT Transient phenomena applied to Transmitters

Tx Transmitter

VHF Very High Frequency

4 Test conditions

For the purposes of the present document, the test conditions of EN 301 489-1 [1], clause 4 shall apply as appropriate. Further provisions related to test conditions for broadcasting service transmitters are specified in the present document.

4.1 General

For emission and immunity tests the test modulation, test arrangements, etc, as specified in the present document, clauses 4.1 to 4.5, shall apply.

For immunity tests, the output of the Tx shall be monitored as specified in the present document, clause 4.2.3.

4.2 Arrangements for test signals

The provisions of EN 301 489-1 [1], clause 4.2 shall apply.

4.2.1 Arrangements for test signals at the input of transmitters

The provisions of EN 301 489-1 [1], clause 4.2.1 shall apply, with the following modifications.

If the transmitter under test incorporates base-band processing and/or coding equipment (e.g. a RDS encoder for a FM transmitter), then this equipment shall be active as in normal operation. The manufacturer shall provide reference encoders and the tests shall be carried out with these in operational mode.

If the transmitter under test does not include integrated base-band processing and/or coding equipment, the manufacturer shall declare whether the transmitter is designed for operation with or without encoder(s). The manufacturer shall clearly state this in the product documentation.

If the transmitter under test is designed for operation with externally fitted encoder(s), then it is left to the decision of the manufacturer whether the transmitter under test shall be tested with such encoder(s). Depending on the manufacturer's decision, the manufacturer may have to provide reference encoders and the tests shall be carried out with these in operational mode.

Any unused input port of the transmitter under test shall be terminated according to the manufacturer's instructions.

4.2.2 Arrangements for test signals at the input of transposers, active deflectors, or RF power amplifiers

The provisions of EN 301 489-1 [1], clause 4.2.3 shall apply with the following modifications.

In case of transposers and active deflectors, the wanted RF input signal, at a frequency determined from the manufacturer's specification, shall be set to a level equal to the mid point of the range declared by the manufacturer.

In case of RF amplifiers, the wanted RF input signal at a level equal to the mid point of the range declared by the manufacturer shall be delivered from an adequate external modulator provided by the manufacturer. The modulator shall be placed outside the test environment.

A broadcasting transmission shall be established at the start of the test and maintained during the test.

4.2.3 Arrangements for test signals at the output of transmitters, transposers, active deflectors or RF power amplifiers


The provisions of EN 301 489-1 [1], clause 4.2.2 shall apply with the following modifications.

Typical test arrangements to assess the performance of the EUT are shown in:

- figure 1 for VHF FM transmitters;
- figure 2 for LF, MF and HF AM transmitters.

NOTE: In practice it is not necessary to use all the individual instrumentation shown in the figures. For specific measurement requirements refer to table 1.

9

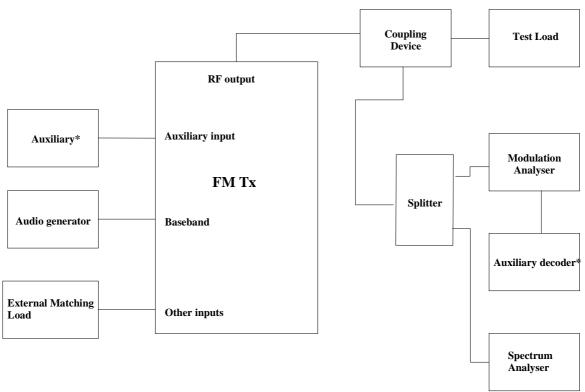

NOTE: *: For FM transmitters which use Auxiliary encoder e.g. RDS, data radio channel, etc.

Figure 1. Typical test arrangement for the performance assessment of an FM transmitter (standards.iten.ai)

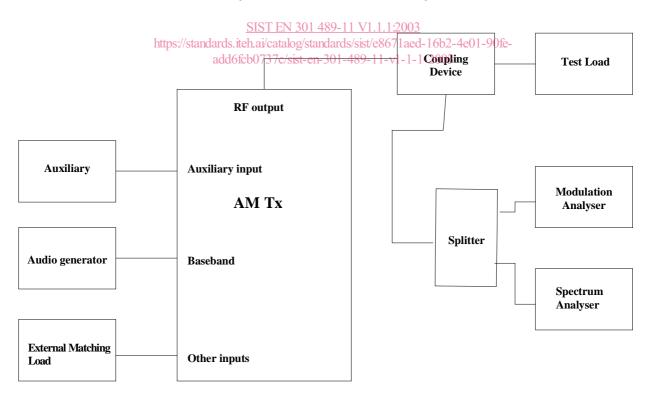


Figure 2: Typical test arrangement for the performance assessment of an LF, MF, or HF AM transmitter