

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Optical amplifiers – Test methods –
Part 1: Power and gain parameters**

**Amplificateurs optiques – Méthodes d'essai –
Partie 1: Paramètres de puissance et de gain**

<https://standards.iteh.ai/catalog/standards/sist/0c72e219-c54a-42b0-86f4-322250e01a94/iec-61290-1-2022>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2022 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 300 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 19 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Optical amplifiers – Test methods –
Part 1: Power and gain parameters**

**Amplificateurs optiques – Méthodes d'essai –
Partie 1: Paramètres de puissance et de gain**

<https://standards.iteh.ai/catalog/standards/sist/0c72e219-c54a-42b0-86f4-322250e01a94/iec-61290-1-2022>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.180.30

ISBN 978-2-8322-2286-7

<p>Warning! Make sure that you obtained this publication from an authorized distributor.</p> <p>Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.</p>
--

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Terms, definitions and abbreviated terms	6
3.1 Terms and definitions.....	6
3.2 Abbreviated terms.....	6
4 Optical power and gain test method.....	6
5 Optical power and gain parameters	6
6 Test results	11
Bibliography.....	14
Figure 1 – Typical behaviour of the gain as a function of input signal power	7
Figure 2 – Typical behaviour of the gain as a function of wavelength	7
Figure 3 – Typical behaviour of the gain as a function of temperature	8
Figure 4 – Typical behaviour of the gain as a function of wavelength	9
Figure 5 – Typical behaviour of the gain fluctuation as a function of time	9
Figure 6 – Typical behaviour of the output power fluctuation as a function of time	10
Figure 7 – Typical behaviour of the gain as a function of input signal power	11
Figure 8 – Typical behaviour of the output power as a function of input signal power	11

<https://standards.iteh.ai/catalog/standards/sist/0c72e219-c54a-42b0-86f4-322250e01a94/iec-61290-1-2022>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL AMPLIFIERS – TEST METHODS –**Part 1: Power and gain parameters****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61290-1 has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics. It is an International Standard.

This second edition cancels and replaces the first edition published in 2014. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) specification of gain ripple as a new parameter;
- b) specification of test method and test report for gain ripple measurements;
- c) use of the term "measurement uncertainty" instead of "measurement accuracy".

The text of this International Standard is based on the following documents:

Draft	Report on voting
86C/1746/FDIS	86C/1783/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 61290 series, published under the general title *Optical amplifiers – Test methods*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IEC 61290-1:2022

<https://standards.iteh.ai/catalog/standards/sist/0c72e219-c54a-42b0-86f4-322250e01a94/iec-61290-1-2022>

OPTICAL AMPLIFIERS – TEST METHODS –

Part 1: Power and gain parameters

1 Scope

This part of IEC 61290 applies to all commercially available optical amplifiers (OAs) and optically amplified subsystems. It applies to OAs using optically pumped fibres (optical fibre amplifiers (OFAs) based on either rare-earth doped fibres or on the Raman effect), semiconductors (semiconductor optical amplifiers (SOAs)), and waveguides (planar optical waveguide amplifiers (POWAs)). It is specifically directed to single-channel amplifiers. Test methods for multichannel amplifiers are defined in the IEC 61290-10 series.

This document establishes uniform requirements for accurate and reliable measurements of the following OA parameters, as defined in IEC 61291-1:2018, Clause 3:

- a) nominal output signal power;
- b) gain;
- c) reverse gain;
- d) maximum gain;
- e) maximum gain wavelength;
- f) maximum gain variation with temperature;
- g) gain wavelength band;
- h) gain wavelength variation;
- i) gain stability;
- j) polarization-dependent gain;
- k) gain ripple (SOA only);
- l) large-signal output stability;
- m) saturation output power;
- n) maximum output signal power;
- o) maximum total output power.

NOTE 1 The applicability of the test methods described in this document to distributed Raman amplifiers is still under study.

NOTE 2 All numerical values followed by (\pm) are suggested values for which the measurement is assured. Other values are acceptable if verified.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61290-1-1, *Optical amplifiers – Test methods – Part 1-1: Power and gain parameters – Optical spectrum analyzer method*

IEC 61290-1-2, *Optical amplifiers – Test methods – Part 1-2: Power and gain parameters – Electrical spectrum analyzer method*

IEC 61290-1-3, *Optical amplifiers – Test methods – Part 1-3: Power and gain parameters – Optical power meter method*

IEC 61291-1:2018, *Optical amplifiers – Part 1: Generic specification*

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61291-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.2 Abbreviated terms

ASE amplified spontaneous emission

FWHM full width at half maximum

OA optical amplifier

OFA optical fibre amplifier

OSA optical spectrum analyzer

POWA planar optical waveguide amplifier

SOA semiconductor optical amplifier

4 Optical power and gain test method

One of the three test methods described in IEC 61290-1-1, IEC 61290-1-2, and IEC 61290-1-3 for quantifying the optical power and gain of an OA shall be followed in this document.

The test method described in IEC 61290-1-1 determines the optical power and gain by means of an optical spectrum analyzer.

The test method described in IEC 61290-1-2 determines the optical power and gain by means of an optical detector and an electrical spectrum analyzer.

The test method described in IEC 61290-1-3 determines the optical power and gain by means of an optical power meter and an optical bandpass filter.

5 Optical power and gain parameters

The parameters listed below are required for gain and power:

- a) Nominal output signal power: The nominal output signal power is given by the minimum output signal optical power for an input signal optical power specified in the relevant detail specification and under nominal operating conditions given in the relevant detail specification. To find this minimum value, input and output signal power levels shall be continuously monitored for a given duration of time and in the presence of changes in the state of polarization and other instabilities, as specified in the relevant detail specification. The measurement procedures and calculations are described in each test method.
- b) Gain: The measurement procedures and calculations are described in each test method.

- c) Reverse gain: As in b), but with the OA operating with the input port used as an output port and vice-versa.
- d) Maximum gain: As in b), but use a wavelength-tuneable optical source and repeat all procedures at different wavelengths in such a way as to cover the wavelength range specified in the relevant detail specification.

Unless otherwise specified, the wavelength should be changed by steps smaller than 1 nm (\pm) around the wavelength where the ASE spectral profile, observed (e.g. with an optical spectrum analyzer or a monochromator) without the input signal, takes its maximum value.

NOTE 1 A wavelength measurement uncertainty of 0,01 nm, within the operating wavelength range of the OA, is attainable with commercially available wavelength meters based on interference-fringes counting techniques. Some tuneable external-cavity laser-diode instruments provide a wavelength measurement uncertainty of 0,2 nm.

The gain values are measured at the different wavelengths as described in b) above. The maximum gain shall be given by the highest of all these gain values at nominal operating condition. Figure 1 shows the typical behaviour of the gain as a function of the input signal power.

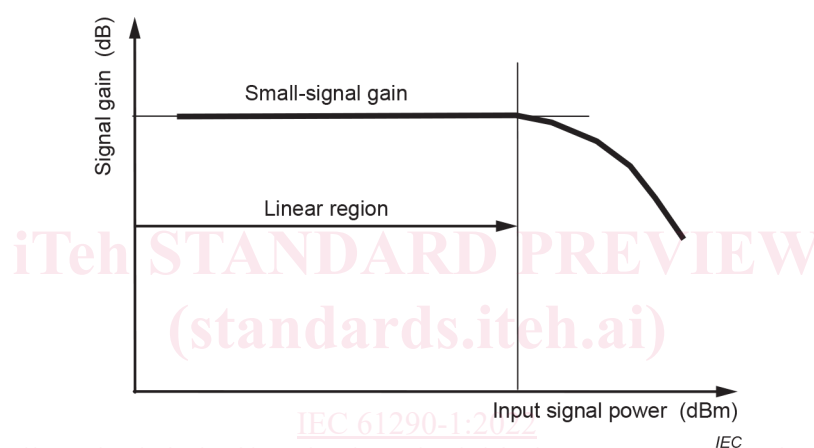


Figure 1 – Typical behaviour of the gain as a function of input signal power

- e) Maximum gain wavelength: As in d), the maximum gain wavelength shall be the wavelength at which the maximum gain occurs. Refer to Figure 2 for typical gain behaviour for different wavelengths.

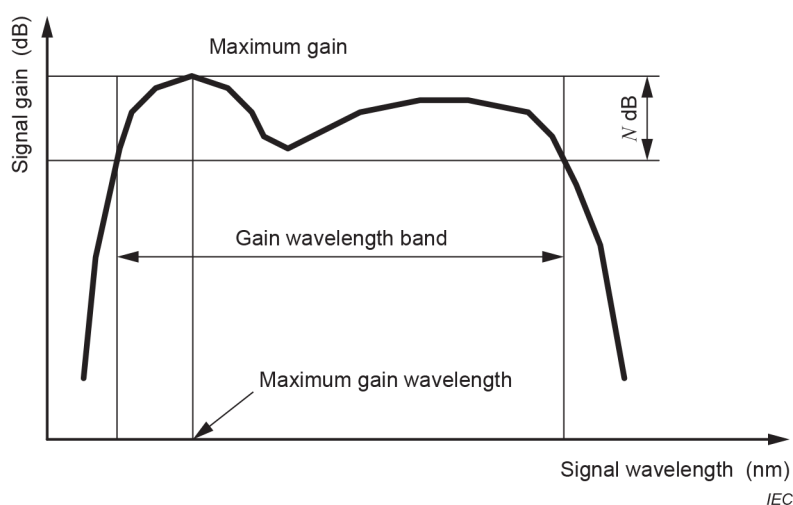


Figure 2 – Typical behaviour of the gain as a function of wavelength

- f) Maximum gain variation with temperature: The maximum change of signal gain for a certain specified temperature range. The measurement procedures and calculations described

below shall be followed, with reference to the measurement set-up and procedure for each test method:

- 1) as described in b), measure the maximum gain $G_{\max\text{-tmp}}$ within the variation of temperature, as specified in the relevant detail specification;
- 2) as described in b), measure the minimum gain $G_{\min\text{-tmp}}$ within the variation of temperature, as specified in the relevant detail specification;
- 3) the maximum gain variation with temperature ΔG_{tmp} is given by Formula (1):

$$\Delta G_{\text{tmp}} = G_{\max\text{-tmp}} - G_{\min\text{-tmp}} \text{ (dB)} \quad (1)$$

Refer to Figure 3.

The gain variation with temperature can depend on the signal wavelength, owing to its active fibre characteristics. The wavelength at which the parameter is specified and measured should be stated.

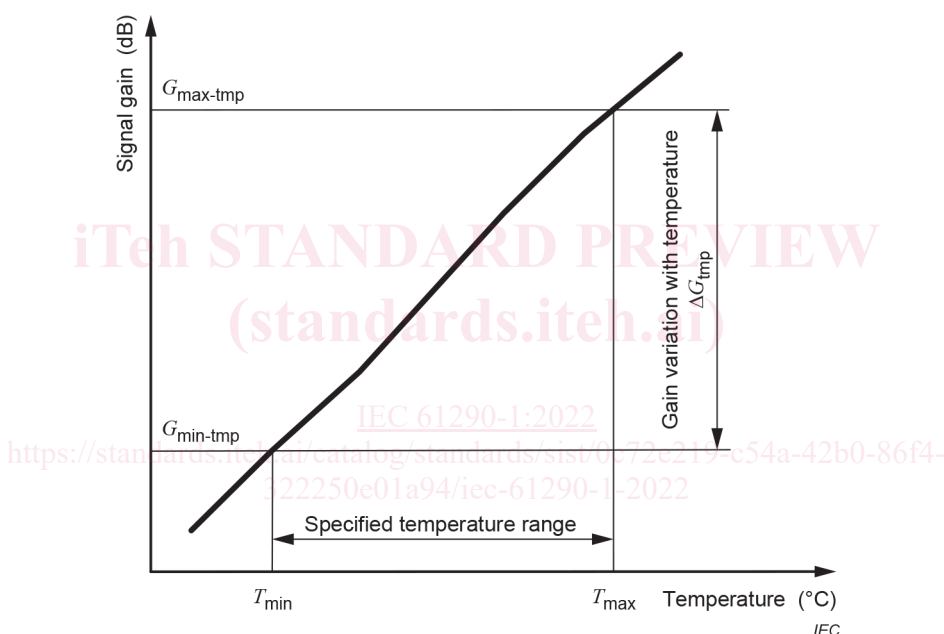


Figure 3 – Typical behaviour of the gain as a function of temperature

- g) Gain wavelength band: Measure the maximum gain as described in d). Identify those wavelengths at which the gain is N dB below the maximum gain. The gain wavelength band shall be given by the wavelength interval(s) that comprise(s) those wavelengths at which the gain is between the maximum gain value and the value N dB below the maximum gain. Calculations are processed according to the following procedure:

- 1) plot the gain at each wavelength as a function of wavelength, as shown in Figure 2;
- 2) draw a horizontal line N dB below the maximum gain value;
- 3) the two or more intersection points of this line with the gain profile plotted in 1) yield two (or more) N dB-down wavelengths, which define the range of the gain wavelength band. The wavelength interval with the minimum difference in N dB-down wavelengths is the gain wavelength band.

NOTE 2 A value of $N = 3$ is typically applied.

- h) Gain wavelength variation: Measure the maximum gain and minimum gain over the specified measurement wavelength range as described in d). The gain variation shall be the difference between the maximum and the minimum gain values. Calculations are processed according to the following procedure:

- 1) plot the gain of each wavelength as shown in Figure 4;

- 2) find the maximum gain, $G_{\max-\lambda}$ (dB) within the specified wavelength band;
- 3) find the minimum gain, $G_{\min-\lambda}$ (dB) within the specified wavelength band;
- 4) calculate the gain wavelength variation, ΔG_{λ} (dB) from Formula (2):

$$\Delta G_{\lambda} = G_{\max-\lambda} - G_{\min-\lambda} \text{ (dB)} \quad (2)$$

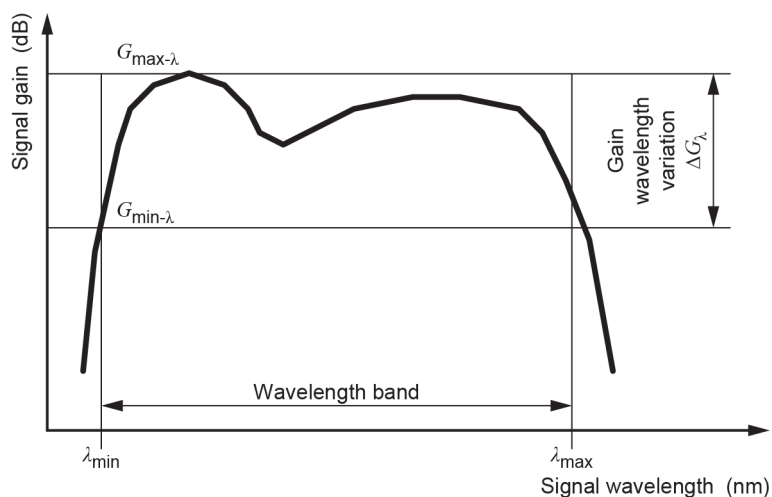


Figure 4 – Typical behaviour of the gain as a function of wavelength

- i) Gain stability: The maximum degree of gain fluctuation of the maximum and minimum signal gain for a certain specified test period, as specified in the relevant detail specification. The measurement procedure and calculations described below shall be followed with reference to the measurement set-up for each test method. Refer to Figure 5 for typical behaviour of the gain fluctuation:
 - 1) as for b), measure the maximum gain $G_{\max\text{-stability}}$ for a certain specified test period, as specified in the relevant detail specification;
 - 2) as for b), measure the minimum gain $G_{\min\text{-stability}}$ for a certain specified test period, as specified in the relevant detail specification;
 - 3) the gain stability $\Delta G_{\text{stability}}$ (dB) is given by Formula (3):

$$\Delta G_{\text{stability}} = G_{\max\text{-stability}} - G_{\min\text{-stability}} \text{ (dB)} \quad (3)$$

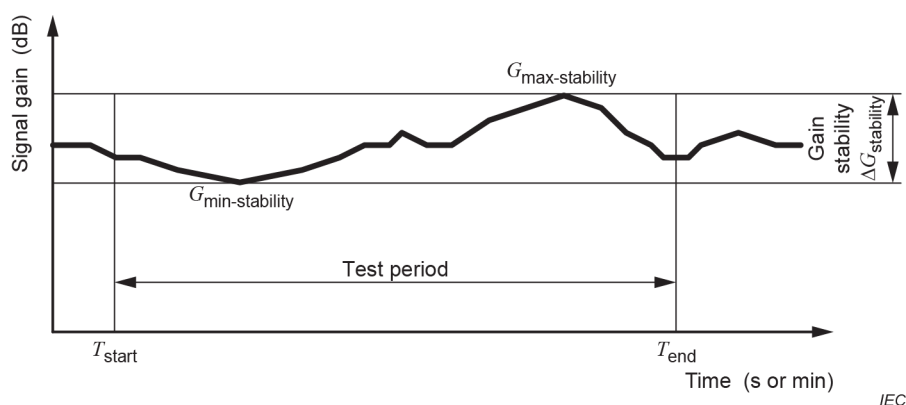


Figure 5 – Typical behaviour of the gain fluctuation as a function of time

- j) Polarization-dependent gain: Gain values at the different states of polarization as described in b). The procedure and calculations are described in each test method.

- k) Gain ripple: Details of the measurement procedures and calculations are described in IEC 61290-1-1.
- l) Large-signal output stability: The maximum degree of gain fluctuation of the maximum and minimum output optical power for a certain specified test period, as specified in the relevant detail specification. The measurement procedure and calculations described below shall be followed, with reference to the measurement set-up for each test method. Refer to Figure 6 for typical behaviour of the output power fluctuation:
- 1) as described in a), measure the maximum output signal power $P_{\text{max-stability}}$ for a certain specified test period at a given wavelength and maximum signal input power, as specified in the relevant detail specification;
 - 2) as described in a), measure the minimum output signal power $P_{\text{min-stability}}$ for a certain specified test period at a given wavelength and maximum signal input power, as specified in the relevant detail specification;
 - 3) compare $P_{\text{max-stability}}$ with $P_{\text{min-stability}}$, and subtract $P_{\text{min-stability}}$ from $P_{\text{max-stability}}$ to obtain the large signal output stability;
 - 4) large-signal output stability $\Delta P_{\text{stability}}$ (dB) is given by Formula (4):

$$\Delta P_{\text{stability}} = P_{\text{max-stability}} - P_{\text{min-stability}} \text{ (dB)} \quad (4)$$

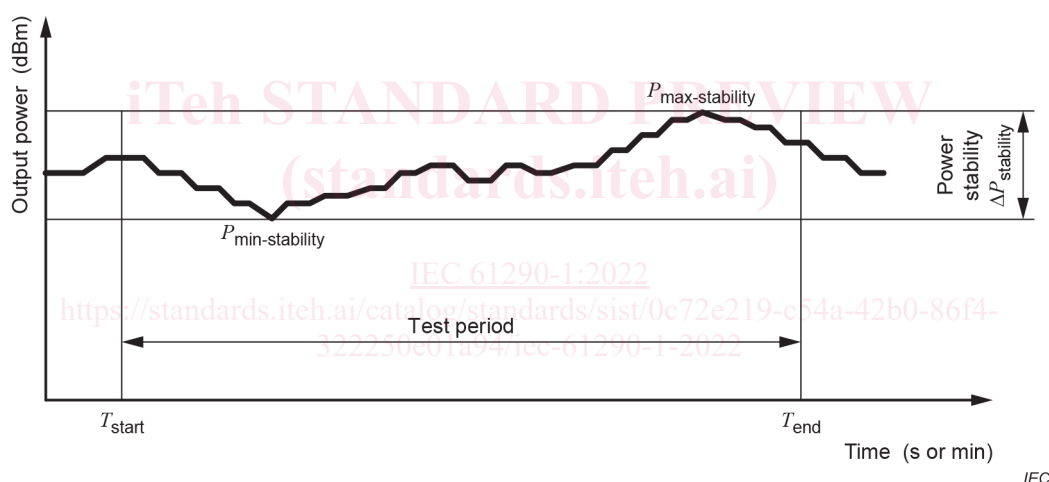


Figure 6 – Typical behaviour of the output power fluctuation as a function of time

- m) Saturation output power: The measurement procedure described below shall be followed with reference to the measurement set-up for each test method. The saturation output power shall be given by the output power at which the gain is reduced by N dB (typically $N = 3$) with respect to the small-signal gain at the same signal wavelength. Calculations are processed according to the following procedure:
- 1) plot the gain versus input power as described in d). Refer to Figure 7 for typical behaviour of the gain;
 - 2) plot the output power versus input power. Refer to Figure 8 for typical behaviour of the output power;
 - 3) find the gain G_{sat} (dB) which is N dB smaller than the small signal gain G_{max} in the linear gain region (see Figure 7);
 - 4) find the input power $P_{\text{in-sat}}$ (dBm) that produces the gain G_{sat} ;
 - 5) find the output power $P_{\text{out-sat}}$ (dBm) at the input power $P_{\text{in-sat}}$ (see Figure 8);
 - 6) $P_{\text{out-sat}}$ is the saturation output power.

NOTE 3 A value of $N = 3$ is typically applied.