

# INTERNATIONAL STANDARD



Environmental testing – iTeh Standards  
Part 2-14: Tests – Test N: Change of temperature  
(<https://standards.iteh.ai>)  
Document Preview

[IEC 60068-2-14:2023](#)

<https://standards.iteh.ai/catalog/standards/iec/3b4877b9-523b-4b80-b18b-6fc4d202bdc0/iec-60068-2-14-2023>



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2023 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

#### IEC publications search - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

#### IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [sales@iec.ch](mailto:sales@iec.ch).

#### IEC Products & Services Portal - [products.iec.ch](http://products.iec.ch)

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

International Standards  
Document Preview

[IEC 60068-2-14:2023](https://standards.iteh.ai/catalog/standards/iec/3b4877b9-523b-4b80-b18b-6fc4d202bdc0/iec-60068-2-14-2023)

<https://standards.iteh.ai/catalog/standards/iec/3b4877b9-523b-4b80-b18b-6fc4d202bdc0/iec-60068-2-14-2023>



IEC 60068-2-14

Edition 7.0 2023-07  
REDLINE VERSION

# INTERNATIONAL STANDARD



---

Environmental testing – iTeh Standards  
Part 2-14: Tests – Test N: Change of temperature  
(<https://standards.iteh.ai>)  
Document Preview

[IEC 60068-2-14:2023](https://standards.iteh.ai/catalog/standards/iec/3b4877b9-523b-4b80-b18b-6fc4d202bdc0/iec-60068-2-14-2023)

<https://standards.iteh.ai/catalog/standards/iec/3b4877b9-523b-4b80-b18b-6fc4d202bdc0/iec-60068-2-14-2023>

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

---

ICS 19.040

ISBN 978-2-8322-7338-8

**Warning! Make sure that you obtained this publication from an authorized distributor.**

## CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references .....	7
3 Terms and definitions .....	7
4 Symbols .....	8
5 General .....	8
5.1 Field conditions of changing temperature .....	8
5.2 Design of <del>change of temperature</del> tests with temperature change.....	9
5.3 Test parameters.....	9
5.4 Purpose and choice of the tests .....	10
5.5 Choice of <del>the duration of</del> the exposure time to each conditioning temperature .....	10
5.6 Choice of the duration of the transfer time $t_2$ .....	11
5.7 Applicability limits of change of temperature tests .....	12
<del>5 Guidance for the selection of the kind of test .....</del>	<del>13</del>
6 Initial and final measurements .....	13
6.1 General.....	13
6.2 Initial measurements.....	13
6.3 Final measurements.....	13
7 Test Na: Rapid change of temperature <del>with prescribed time of transfer</del> .....	13
7.1 General description of the test .....	13
7.2 Testing procedure .....	13
7.2.1 Testing chamber.....	13
7.2.2 Mounting or supporting of the test specimen .....	16
7.2.3 Severities .....	16
7.2.4 <del>Conditioning</del> Preconditioning .....	18
7.2.5 Test cycle .....	18
7.3 Recovery .....	21
<del>7.4 Information to be given in the relevant specification .....</del>	<del>22</del>
8 Test Nb: Change of temperature with specified rate of change .....	22
8.1 General description of the test .....	22
8.2 Testing procedure .....	22
8.2.1 Testing chamber.....	22
8.2.2 Mounting or supporting structure of the test specimen .....	23
8.2.3 Severities .....	23
8.2.4 Tolerance .....	24
8.2.5 <del>Conditioning</del> Preconditioning .....	25
8.3 Test cycle .....	25
8.4 Recovery .....	27
<del>8.4 Information to be given in the relevant specification .....</del>	<del>27</del>
9 Test Nc: Rapid change of temperature, two-fluid-bath method .....	27
9.1 General description of the test .....	27
9.2 Testing procedure .....	28
9.2.1 Testing equipment .....	28
9.2.2 Severities .....	28

9.2.3	Conditioning .....	28
9.3	Test cycle .....	28
9.4	Recovery .....	30
<del>9.5</del>	<del>Information to be given in the relevant specification .....</del>	<del>31</del>
10	Information to be given in the test report.....	31
Annex A (informative)	Potential consequences of improper severities .....	33
Annex B (informative)	Thermal responsiveness of different materials and geometries.....	34
Annex C (normative)	Auxiliary table with exemplary temperature tolerances $\pm\sigma_T$ for preferred combinations of high and low conditioning temperatures and rates of temperature change (Test Nb) .....	35
Bibliography	.....	41
Figure 1	– Determination of <del>test duration time (<math>t_1</math>)</del> the exposure time $t_1$ of the specimen to each conditioning temperature .....	11
Figure 2	– Schematic representation of examples of thermal test cabinets and test procedure with two separate test chambers .....	14
Figure 3	– Schematic representation of examples of thermal test cabinets with one test chamber .....	15
Figure 4	– Possibility of condensation during rapid temperature change .....	16
Figure 5	– Possibility of condensation during transfer of the specimen.....	16
Figure 6	– Increased severity of Test Na.....	17
<del>Figure 2</del>	<del>– Na test cycle .....</del>	<del>19</del>
Figure 7	– Na test cycle, one-chamber method .....	19
Figure 8	– Na test cycle, two-chamber method.....	21
Figure 9	– Tolerance for fluctuation of test temperatures .....	25
Figure 10	– Nb test cycle .....	26
Figure 11	– Test times for intermediate operation of specimens .....	27
Figure 12	– Nc test cycle .....	30
Figure A.1	– Delayed temperature change of the specimen.....	33
Figure B.1	– Rate of temperature change of specimen with differing thermal responsiveness.....	34
Figure C.1	– Tolerance for fluctuation of test temperatures for exemplary test parameters .....	36
Table C.1	– Applicable temperature tolerances $\pm\sigma_T$ in K for preferred combinations of high and low conditioning temperatures and rates of temperature change $dT_R$ .....	37

# INTERNATIONAL ELECTROTECHNICAL COMMISSION

## ENVIRONMENTAL TESTING –

### Part 2-14: Tests – Test N: Change of temperature

#### FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch> or [www.iso.org/patents](http://www.iso.org/patents). IEC shall not be held responsible for identifying any or all such patent rights.

**This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition IEC 60068-2-14:2009. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.**

IEC 60068-2-14 has been prepared by IEC technical committee 104: Environmental conditions, classification and methods of test. It is an International Standard.

This seventh edition cancels and replaces the sixth edition published in 2009. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) updating of the figures for clarification purposes;
- b) updating of specimen temperature(s) and severities as well as tolerances for change of temperature tests;
- c) revision of standardized requirements for test reports for Tests Na and Nb.

The text of this International Standard is based on the following documents:

Draft	Report on voting
104/991/FDIS	104/1016/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at [www.iec.ch/members\\_experts/refdocs](http://www.iec.ch/members_experts/refdocs). The main document types developed by IEC are described in greater detail at [www.iec.ch/publications](http://www.iec.ch/publications).

A list of all parts in the IEC 60068 series, published under the general title *Environmental testing*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under [webstore.iec.ch](http://webstore.iec.ch) in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

**IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

## INTRODUCTION

A change of temperature test is intended to determine the effect on the specimen of a change of temperature or a succession of changes of temperature.

It is not intended to show effects that are ~~due only to high or low temperatures~~ caused by low or high temperature exposure. For these effects, the cold test or the dry heat test, as specified in IEC 60068-2-1 and IEC 60068-2-2, should be used.

The effect of ~~such~~ change of temperature tests is determined by

- values of high and low conditioning temperature between which the change is to be ~~effected~~ affected,
- the conditioning times for which the test specimen is kept at these temperatures,
- the rate of change between these temperatures,
- the number of cycles of conditioning,
- the amount of heat transfer into or from the specimen,
- the thermal conductivity and the materials of the specimen,
- the rate of change of the specimen's temperature on its surface (respectively in relevant positions) or in its core.

Guidance on the choice of suitable test parameters for inclusion in the detail specification is given throughout this document.

iteh Standards  
(<https://standards.iteh.ai>)  
Document Preview

[IEC 60068-2-14:2023](https://standards.iteh.ai/catalog/standards/iec/3b4877b9-523b-4b80-b18b-6fc4d202bdc0/iec-60068-2-14-2023)

<https://standards.iteh.ai/catalog/standards/iec/3b4877b9-523b-4b80-b18b-6fc4d202bdc0/iec-60068-2-14-2023>



## ENVIRONMENTAL TESTING –

### Part 2-14: Tests – Test N: Change of temperature

#### 1 Scope

~~This part of IEC 60068 provides a test to determine the ability of components, equipment or other articles to withstand rapid changes of ambient temperature. The exposure times adequate to accomplish this will depend upon the nature of the specimen.~~

This document provides tests with specified ambient temperature changes to analyse their impacts on specimens.

#### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

~~IEC 60068 (all parts), *Environmental testing*~~

IEC 60068-2-1, *Environmental testing – Part 2-1: Tests – Test A: Cold*

IEC 60068-2-2, *Environmental testing – Part 2-2: Tests – Test B: Dry heat*

~~IEC 60068-2-17, *Environmental testing – Part 2-17: Tests – Test Q: Sealing*~~

~~<https://standards.iteh.ai/catalog/standards/iec/3b4877b9-523b-4b80-b18b-6fc4d202bdc0/iec-60068-2-14-2023>~~

~~IEC Guide 104, *The preparation of safety publications and the use of basic safety publications and group safety publications*~~

#### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60068-2-1 and IEC 60068-2-2 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

## 4 Symbols

$D$	temperature difference between high conditioning temperature $T_B$ and low conditioning temperature $T_A$
$T_A$	low conditioning temperature
$T_{Ad}$	decreased low conditioning temperature
$T_B$	high conditioning temperature
$T_{Bi}$	increased high conditioning temperature
$T_{STD}$	temperature of standard atmospheric conditions for measurement and tests (15 °C to 35 °C)
$\Delta T_s$	temperature difference between the specimen and the test medium (e.g. air)
$dT_R$	temperature change rate (Test Nb)
$t_s$	stabilization time of specimen temperature
$t_{s^*}$	stabilization time of specimen temperature during the first cycle, starting from laboratory air temperature
$t_1$	exposure time of the specimen to each conditioning temperature
$t_2$	transfer time of the specimen from one test chamber to another (two-chamber test method)
$\pm\sigma_T$	applicable temperature tolerance of the medium temperature during temperature transition (Test Nb)
$\pm\sigma_{Tconst}$	applicable temperature tolerance of the medium temperature during the constant conditioning

## 5 General

### 5.1 Field conditions of changing temperature

It is common in electronic equipment and components that changes of temperature occur. Parts inside equipment undergo slower changes of temperature than those on an external surface when the equipment is not switched on.

Rapid changes of temperature ~~may~~ can be expected

- when equipment is transported from warm indoor into cold outdoor environments ~~into cold open air conditions~~ or vice versa,
- when equipment is suddenly cooled by rainfall or immersion in cold water,
- when equipment is attached or in close proximity to components leading to high thermal stress (e.g. combustion engines, central processing units),
- when equipment is artificially cooled or heated,
- in externally mounted airborne equipment or when equipment is located in unheated aircraft or cargo holds,
- under certain conditions of transportation and storage.

Components will undergo stresses due to changing temperature when high temperature gradients build up in an equipment after being switched on, for example in the ~~neighbourhood~~ proximity of high ~~wattage~~ power resistors, radiation can cause rise of the surface temperature ~~in neighbouring~~ on close components while other portions remain cold.

Artificially cooled components ~~may~~ can be subjected to rapid temperature changes when the cooling system is switched on. Rapid changes of temperature in components ~~may~~ can also be induced during manufacturing processes or the transportation of equipment. Both the number and amplitude of temperature changes, the time interval between them and the thermal responsiveness of the equipment (or specimen) are important.

## ~~4~~ General

### 5.2 Design of ~~change of temperature~~ tests with temperature change

Change of temperature Tests Na, Nb and Nc comprise alternate periods at a high and ~~at~~ a low temperature with well-defined transfers from one temperature to the other. The conditioning run from the laboratory ambient temperature to the first conditioning temperature, then to the second conditioning temperature, then back to the laboratory ambient temperature is considered as one test cycle.

### 5.3 Test parameters

~~Test parameters comprise the following:~~

- ~~— laboratory ambient;~~
- ~~— high temperature;~~
- ~~— low temperature;~~
- ~~— duration of exposure;~~
- ~~— transfer time or rate of change;~~
- ~~— number of test cycles.~~

<https://standards.iteh.ai/catalog/standards/iec/3b4877b9-523b-4b80-b18b-6fc4d202bdc0/iec-60068-2-14-2023>

~~The high and low temperatures are understood to be ambient temperatures which will be reached by most specimens with a certain time lag.~~

~~Only in exceptional cases may they be specified outside the normal storage or operating temperature range of the object under test.~~

Test parameters comprise the following:

- laboratory ambient conditions (mainly temperature and humidity);
- high conditioning temperature  $T_B$ ;
- increased high conditioning temperature  $T_{B1}$ , if applicable;
- low conditioning temperature  $T_A$ ;
- decreased low conditioning temperature  $T_{Ad}$ , if applicable;
- exposure time  $t_1$  of the specimen to each conditioning temperature;
- transfer time  $t_2$  or temperature change rate  $dT_R$ ;
- number of test cycles.

As these tests are intended to validate the effects of temperature changes on the specimen, the specimen's characteristics should always be taken into consideration (if not specified otherwise):

- thermal responsiveness of the specimen in affected areas or the core;

- thermal conductivity;
- specific heat capacity;
- density;
- geometry;
- mass.

The experimental determination of these characteristics is recommended, if unknown and not specified otherwise.

The test is accelerated because the number of severe changes of temperature in a given period is greater than that which will occur under field conditions.

The high and low conditioning temperatures are understood to be ambient temperatures which will be reached by most specimens with a certain time lag. It is recommended to consider the specimen's characteristics when specifying the test. Annex A gives further information on potential consequences of improper severities of tests.

Only in exceptional cases should these temperatures be specified outside the normal storage or operating temperature range of the object under test.

NOTE If the specimen's characteristics (mass, density, geometry) prevent the specified rate of change, the temperatures can be specified outside the normal storage or operating temperatures to increase the severity of the intended test, if not specified otherwise.

#### 5.4 Purpose and choice of the tests

Change of temperature testing is recommended in the following cases:

- evaluation of electrical performance after a specified number of rapid changes of temperature, Test Na or Test Nc;
- evaluation of the suitability of mechanical components, and of materials and combinations of materials to withstand rapid changes of temperature, Test Na or Test Nc;
- evaluation of the suitability of construction of components to withstand artificial stressing, Test Na or Test Nc;
- evaluation of electrical performance ~~during~~ as a consequence of a change of temperature, Test Nb;
- evaluation of mechanical performance ~~during~~ as a consequence of a change of temperature, Test Nb.


The change of temperature tests specified in the IEC 60068 series is not intended to evaluate the difference in material constants or electrical performance when operating under ~~temperature stability at the two extremes of temperature~~ the conditioning temperatures  $T_A$  and  $T_B$ .

#### 5.5 Choice of ~~the duration of~~ the exposure time to each conditioning temperature


The duration of the exposure should be based on the requirements stated in 7.2.3, 8.2.3 or 9.2.2, or as stated in the relevant specification, keeping in mind the following points:

- a) The exposure begins as soon as the specimen is in the new environment.
- b) Stabilization occurs when the temperature difference ~~( $\Delta T$ )~~ between the specimen and the test medium ( $\Delta T_s$ ) is within ~~3 K to~~ 5 K, or as stated in the test specification. The stabilization ~~period, (time of specimen temperature  $t_s$ ),~~ is from the start of exposure until the ~~time~~ moment when the temperature is within the specified difference. A representative point (or points) on the specimen ~~may~~ can be used for this measurement.
- c) ~~The test duration,  $t_1$ , shall be longer than the specimen stabilization time,  $t_s$ .~~ The exposure time  $t_1$  of the specimen to each conditioning temperature shall be longer than the

stabilization time of the specimen temperature  $t_s$ . Figure 1 provides a graphical representation of the process. ~~This may~~ It is possible that this will not be appropriate for heat generating specimens.

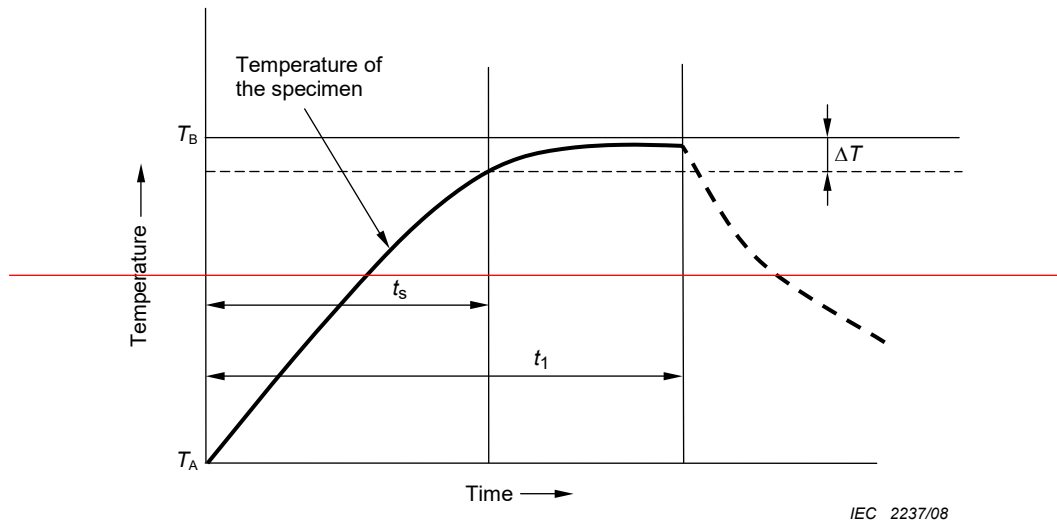

IEC 2237/08

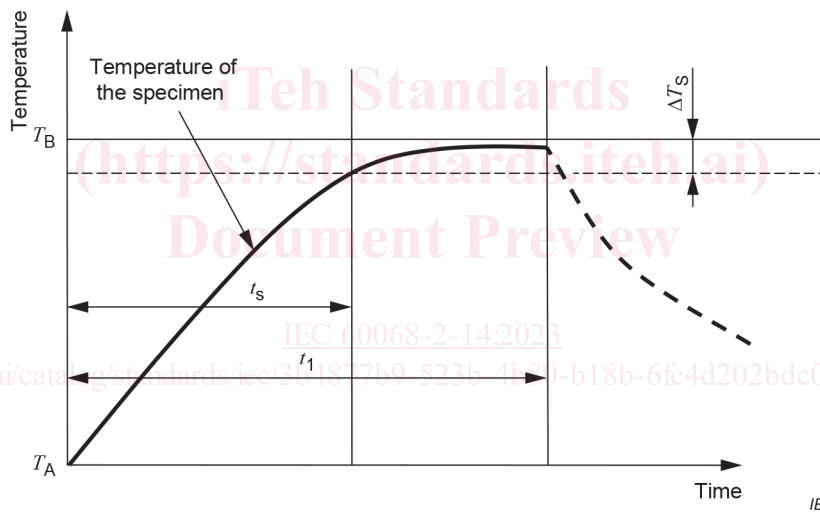

IEC

Figure 1 – Determination of ~~test duration time ( $t_1$ )~~ the exposure time  $t_1$  of the specimen to each conditioning temperature

### 5.6 Choice of the duration of the transfer time $t_2$

~~If, in the case of the two-chamber method, because of the large size of the specimens the transfer time cannot be made in 3 min, the transfer time may be increased without an appreciable influence on the test results as follows:~~

$$t_2 \leq 0,05 t_s$$

where

~~$t_2$ — is the duration of the transfer time;~~

~~$t_s$ — is the stabilisation period of the specimen.~~

If, for example owing to the large size of the specimens, the transfer time  $t_2$  cannot be kept within 3 min, the transfer time can be increased with a negligible influence on the test results as follows:

$$t_2 \leq 0,05 t_s$$

This applies for the two-chamber test (see 7.2.1) method only. When using the one-chamber test method, period  $t_2$  is not applicable.

## 5.7 Applicability limits of change of temperature tests

Inside a specimen, the temperature change rate depends on the heat conduction of its materials, the spatial distribution of its heat capacity as well as on its dimensions and surface area. A representative point (or points) on (or inside) the specimen can be used for the measurement of the temperature change rates.

NOTE 1 The rate of temperature change of specimens made of the same material and mass can vary if their surfaces differ from each other.

The change of temperature at one point on the surface of a specimen follows approximately an exponential law. Inside large specimens, such alternate exponential rises and decreases ~~may~~ can lead to periodic and approximately sinusoidal changes of temperature with much lower amplitudes than the applied temperature swing. Annex B gives further information on the thermal responsiveness of different materials and geometries.

The mechanism of heat transfer between the test specimen and the conditioning medium in the chamber or bath should be ~~taken into account~~ considered. Liquid in motion leads to very high rates of change of temperature on the surface of the specimens and still air to very low rates.

NOTE 2 If more than one specimen is tested in the same test chamber, a uniform incoming airflow can be disturbed. For further information on the relation of airflow and specimen temperature, IEC 60068-3-1 can be helpful.

The two-bath method with water as a conditioning medium (Test Nc) should be restricted to specimens which are either sealed or are by their nature insensitive to water, since their performance and properties ~~may~~ can deteriorate by immersion.

In particular cases, such as with specimens sensitive to water, a test with liquid other than water ~~may need to~~ should be specified. When designing such a test, the characteristics of heat transfer of the liquid, which ~~may~~ can differ from those of water, shall be ~~taken into account~~ considered.

NOTE 3 To assess the applicability of the two-bath method, evaluations from Test Q: Sealing (IEC 60068-2-17) ~~may~~ can be helpful.

## ~~5 Guidance for the selection of the kind of test~~

~~The severity of the test will increase with the increase in the temperature difference, the increase in rate of temperature change, and the heat transfer to the specimen.~~

The application of Tests N is preferred as part of a sequence of tests. It is possible that some types of damage ~~may~~ will not become apparent by the final measurements of a Test N but ~~may~~ will appear only during subsequent tests ~~(e.g. Test Q: Sealing, Test F: Vibration or Test D: Accelerated damp heat).~~

An exemplary sequence of tests can be IEC 60068-2-17 Test Q: Sealing, IEC 60068-2-6 Test Fc: Vibration (sinusoidal), IEC 60068-2-30 Test Db: Damp heat, cyclic (12 h + 12 h cycle) or IEC 60068-2-67 Test Cy: Damp heat.