

INTERNATIONAL STANDARD

IEC
62056-46

First edition
2002-02

**Electricity metering –
Data exchange for meter reading,
tariff and load control –**

**Part 46:
Data link layer using HDLC protocol**

(standards.iteh.ai)

[IEC 62056-46:2002](https://standards.iteh.ai/catalog/standards/sist/60a457b0-6e1a-4b12-9ad9-338907e25213/iec-62056-46-2002)

<https://standards.iteh.ai/catalog/standards/sist/60a457b0-6e1a-4b12-9ad9-338907e25213/iec-62056-46-2002>



Reference number
IEC 62056-46:2002(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** (www.iec.ch)

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site (www.iec.ch/catlg-e.htm) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published**

This summary of recently issued publications (www.iec.ch/JP.htm) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC 62056-46

First edition
2002-02

Electricity metering – Data exchange for meter reading, tariff and load control –

Part 46: Data link layer using UDLC protocol (standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/60a457b0-6e1a-4b12-9ad9-338907e25213/iec-62056-46-2002>

© IEC 2002 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission 3, rue de Varembé Geneva, Switzerland
Telefax: +41 22 919 0300 e-mail: inmail@iec.ch IEC web site <http://www.iec.ch>



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE XB

For price, see current catalogue

CONTENTS

FOREWORD	4
1 Scope	6
2 Normative references	6
3 Terms, definitions and abbreviations	7
4 Overview	8
4.1 The LLC sub-layer	8
4.2 The MAC sub-layer	8
4.3 Specification method	8
5 The LLC sub-layer	9
5.1 The role of the LLC sub-layer	9
5.2 Service specification for the LLC sub-layer	9
5.2.1 Setting up the Data Link Connection	10
5.2.2 Disconnecting the Data Link Connection	13
5.2.3 Data communication	16
5.3 Protocol specification for the LLC sub-layer	20
5.3.1 Overview	20
5.3.2 LLC protocol data unit (LPDU) structure	20
5.3.3 State transition tables for the LLC sub-layer	21
6 The MAC sub-layer	22
6.1 HDLC selections	22
6.2 Service specification for the MAC sub-layer	22
6.2.1 Setting up the MAC connection	22
6.2.2 Disconnecting the MAC connection	26
6.2.3 Data communication	30
6.3 Physical layer services used by the MAC sub-layer	32
6.3.1 Overview	32
6.3.2 Setting up a physical link	33
6.3.3 Disconnecting the physical link	33
6.3.4 Data communication	33
6.4 Protocol specification for the MAC sub-layer	33
6.4.1 The MAC PDU and the HDLC frame	33
6.4.2 MAC addressing	35
6.4.3 Command and response frames	39
6.4.4 Elements of the procedures	42
6.4.5 State transition diagram for the server MAC sub-layer	57
Annex A (informative) FCS calculation	59
Annex B (informative) Data model and protocol	62
Annex C (informative) Data link layer management services	63

Figure 1 – Data Link (LLC) services for setting up the Data Link Connection	10
Figure 2 – Data Link (LLC) services for disconnecting the Data Link Connection	13
Figure 3 – Data link layer data communication services	17
Figure 4 – The ISO/IEC 8802-2 LLC protocol data unit format.....	20
Figure 5 – The used LLC protocol data unit format.....	20
Figure 6 – MAC sub-layer services for setting up the MAC (DL) connection at the client and server sides	23
Figure 7 – MAC sub-layer services for disconnecting the MAC (DL) connection at the client and server sides	26
Figure 8 – MAC sub-layer data communication services	30
Figure 9 – Physical layer services used by the MAC sub-layer.....	33
Figure 10 – MAC sub-layer frame format (HDLC frame format type 3).....	34
Figure 11 – Multiple frames.....	34
Figure 12 – The frame format field	34
Figure 13 – MSC for long MSDU transfer in a transparent manner	51
Figure 14 – Example configuration to illustrate broadcasting.....	52
Figure 15 – Sending out a pending UI frame with a .response data	53
Figure 16 – Sending out a pending UI frame with a response to a RR frame	54
Figure 17 – Sending out a pending UI frame on receipt of an empty UI frame	54
Figure 18 – State transition diagram for the server MAC sub-layer.....	58
Figure B.1 – The three-step approach of COSEM	62
Figure C.1 – Layer management services	63
https://standards.iteh.ai/catalog/standards/sist/60a457b0-6e1a-4b12-9ad9-338907e25213/iec-62056-46-2002	
Table 1 – State transition table of the client side LLC sub-layer	21
Table 2 – State transition table of the server side LLC sub-layer.....	21
Table 3 – Table of reserved client addresses	37
Table 4 – Table of reserved server addresses.....	37
Table 5 – Handling inopportune address lengths.....	39
Table 6 – Command and response frames	39
Table 7 – Control field format.....	40
Table 8 – Example for parameter negotiation values with the SNRM/UA frames	47
Table 9 – Summary of MAC Addresses for the example.....	52
Table 10 – Broadcast UI frame handling	52

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**ELECTRICITY METERING – DATA EXCHANGE
FOR METER READING, TARIFF AND LOAD CONTROL –**

Part 46: Data link layer using HDLC protocol

FOREWORD

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.

The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this International Standard may involve the use of a maintenance service concerning the stack of protocols on which the present standard IEC 62056-46 is based.

The IEC takes no position concerning the evidence, validity and scope of this maintenance service.

The provider of the maintenance service has assured the IEC that he is willing to provide services under reasonable and non-discriminatory terms and conditions for applicants throughout the world. In this respect, the statement of the provider of the maintenance service is registered with the IEC. Information may be obtained from:

DLMS¹ User Association
Geneva / Switzerland
www.dlms.ch

International Standard IEC 62056-46 has been prepared by IEC technical committee 13: Equipment for electrical energy measurement and load control.

The text of this standard is based on the following documents:

FDIS	Report on voting
13/1267/FDIS	13/1273/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 3.

¹ Device Language Message Specification.

Annexes A, B and C are for information only.

The committee has decided that the contents of this publication will remain unchanged until 2006. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 62056-46:2002](https://standards.iteh.ai/catalog/standards/sist/60a457b0-6e1a-4b12-9ad9-338907e25213/iec-62056-46-2002)

<https://standards.iteh.ai/catalog/standards/sist/60a457b0-6e1a-4b12-9ad9-338907e25213/iec-62056-46-2002>

ELECTRICITY METERING – DATA EXCHANGE FOR METER READING, TARIFF AND LOAD CONTROL –

Part 46: Data link layer using HDLC protocol

1 Scope

This part of IEC 62056 specifies the data link layer for connection-oriented, HDLC-based, asynchronous communication profile.

In order to ensure a coherent data link layer service specification for both connection-oriented and connectionless operation modes, the data link layer is divided into two sub-layers: the Logical Link Control (LLC) sub-layer and the Medium Access Control (MAC) sub-layer.

This specification supports the following communication environments:

- point-to-point and point-to-multipoint configurations;
- dedicated and switched data transmission facilities;
- half-duplex and full-duplex connections;
- asynchronous start/stop transmission, with 1 start bit, 8 data bits, no parity, 1 stop bit.

Two special procedures are also defined:

- transferring of separately received Service User layer PDU parts from the server to the client in a transparent manner. The server side Service user layer can give its PDU to the data link layer in fragments and the data link layer can hide this fragmentation from the client;
- event reporting, by sending UI frames from the secondary station to the primary station.

Annex B gives an explanation of the role of data models and protocols in electricity meter data exchange.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-300:2001, *International Electrotechnical Vocabulary –Electrical and electronic measurements and measuring instruments – Part 311: General terms relating to measurements – Part 312: General terms relating to electrical measurements – Part 313: Types of electrical measuring instruments – Part 314: Specific terms according to the type of instrument*

IEC/TR 62051:1999, *Electricity metering –Glossary of terms*

IEC 62056-42, *Electricity metering – Data exchange for meter reading, tariff and load control – Part 42: Physical layer services and procedures for connection oriented asynchronous data exchange* ¹⁾

¹⁾ To be published.

IEC 62056-53, *Electricity metering – Data exchange for meter reading, tariff and load control – Part 53 – COSEM Application layer* ¹⁾

IEC 62056-61, *Electricity metering – Data exchange for meter reading, tariff and load control – Part 61 – OBIS Object Identification System* ¹⁾

IEC 62056-62, *Data exchange for meter reading, tariff and load control – Part 62: Interface Classes* ¹⁾

ISO/IEC 8802-2:1998, *Information technology – Telecommunications and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 2: Logical link control*

ISO/IEC 13239:2000, *Information Technology – Telecommunications and information exchange between systems – High-level data link control (HDLC) procedures*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purpose of this part of IEC 62056, the definitions found in IEC 60050-300 and IEC/TR 62051 apply.

3.2 Abbreviations

APDU	Application layer Protocol Data Unit
COSEM	Companion Specification for Energy Metering
DISC	DISConnect (an HDLC frame type)
DL	Data Link
DM	Disconnected Mode (an HDLC frame type)
DPDU	Data link Protocol Data Unit
DSAP	Data link Service Access Point
DSDU	Data link Service Data Unit
FCS	Frame Check Sequence
FRMR	FRaMe Reject (an HDLC frame type)
HCS	Header Check Sequence
HDLC	High-level Data Link Control
I	Information (an HDLC frame type)
LLC	Logical Link Control (Sub-layer)
LSAP	LLC sub-layer Service Access Point
LPDU	LLC Protocol Data Unit
LSB	Least Significant Bit
LSDU	LLC Service Data Unit
MAC	Medium Access Control (sub-layer)
MSAP	MAC sub-layer Service Access Point (here it is equal to the HDLC address)
MSB	Most Significant Bit
MSDU	MAC Service Data Unit
NDM	Normal Disconnected Mode
NRM	Normal Response Mode
N(R)	Receive sequence Number

¹⁾ To be published.

N(S)	Send sequence Number
P/F	Poll/Final bit
PDU	Protocol Data Unit
PH	Physical layer
PSDU	Physical layer Service Data Unit
RNR	Receive Not Ready (an HDLC frame type)
RR	Receive Ready (an HDLC frame type)
SAP	Service Access Point
SDU	Service Data Unit
SNRM	Set Normal Response Mode (an HDLC frame type)
TWA	Two Way Alternate
UA	Unnumbered Acknowledgement (an HDLC frame type)
UI	Unnumbered Information (an HDLC frame type)
UNC	Unbalanced operation Normal response mode Class
USS	Unnumbered Send Status
V(R)	Receive state Variable
V(S)	Send state Variable

4 Overview

4.1 The LLC sub-layer

In the connection-oriented profile the only role of the LLC sub-layer is to ensure consistent Data Link addressing. It can be considered that the LLC sub-layer, defined in ISO/IEC 8802-2 is used in an extended class I operation, where the LLC sub-layer provides the standard connectionless data services via a connection-oriented MAC sub-layer.

The LLC sub-layer provides Data Link (DL) connection/disconnection services to the Service User layer, but it uses the services of the MAC sub-layer to execute these services.

The LLC sub-layer is specified in clause 5.

4.2 The MAC sub-layer

The MAC sub-layer – the major part of this data link layer specification – is based on ISO/IEC 13239 concerning high-level data link control (HDLC) procedures.

This standard includes a number of enhancements compared to the original HDLC, for example in the areas of addressing, error protection and segmentation. These enhancements have been incorporated in a new frame format, which meets the requirements of the environment found in telemetry applications for electricity metering and similar industries.

The MAC sub-layer is specified in clause 6.

4.3 Specification method

Sub-layers of the data link layer are specified in terms of **services** and **protocol**.

Service specifications cover the services required of, or by, the given sub-layer at the logical interfaces with the neighbouring other sub-layer or layer, using connection oriented procedures. Services are the standard way to specify communications between protocol layers. Through the use of four types of transactions, commonly known as service primitives (Request, Indication, Response and Confirm) the service provider co-ordinates and manages the communication between the users. Using service primitives is an abstract, implementation-

independent way to specify the transactions between protocol layers. Given this abstract nature of the primitives, their use makes good sense for the following reasons:

- they permit a common convention to be used between layers, without regard to specific operating systems and specific languages;
- they give the implementers a choice of how to implement the service primitives on a specific machine.

Service primitives include service parameters. There are three classes of service parameters:

- parameters transmitted to the peer layer, becoming part of the transmitted frame, for example addresses, control information;
- parameters which have only local significance (e.g. Physical_Connection_Type).
- parameters which are transmitted transparently across the data link layer to the user of the data link.

NOTE Data link layer management services are explained in Annex C.

This standard specifies values for parameters of the first category only. The **protocol** specification for a protocol layer includes:

- the specification of the procedures for the transmission of the set of messages exchanged between peer-layers;
- the procedures for the correct interpretation of protocol control information;
- the layer behaviour.

The protocol specification for a protocol layer does not include:

- the structure and the meaning of the information which is transmitted by means of the layer (User data subfield);
- the identity of the Service User layer;
- the manner in which the Service User layer operation is accomplished as a result of exchanging Data Link messages;
- the interactions that are the result of using the protocol layer.

5 The LLC sub-layer

5.1 The role of the LLC sub-layer

The LLC sub-layer used in this profile is based on ISO/IEC 8802-2. The presence of this sub-layer in the connection-oriented profile is somewhat artificial: the LLC sub-layer is used as a kind of protocol selector, and the 'real' data link layer connection is ensured by the MAC sub-layer. It can be considered that the standard LLC sub-layer is used in an extended class I operation, where the LLC sub-layer provides the standard data-link-connectionless services via a connection-oriented MAC sub-layer. In order to be able to establish the data link connection, the LLC sub-layer provides transparent MAC connection/disconnection services to the service user protocol layer.

5.2 Service specification for the LLC sub-layer

This subclause specifies the services required of, or by, the LLC sub-layer at the logical interfaces with the Service User layer and the MAC sub-layer, using connection-oriented procedures. As the Service User layer 'sees' the services of the LLC sub-layer as the services of the data link layer, in this standard these services are called data link layer services and the prefix "DL" to designate these services is used.

5.2.1 Setting up the Data Link Connection

Overview

Figure 1 shows the services provided by the primary station (client side) and secondary station (server side) data link layers to the service user layer for data link connection establishment.

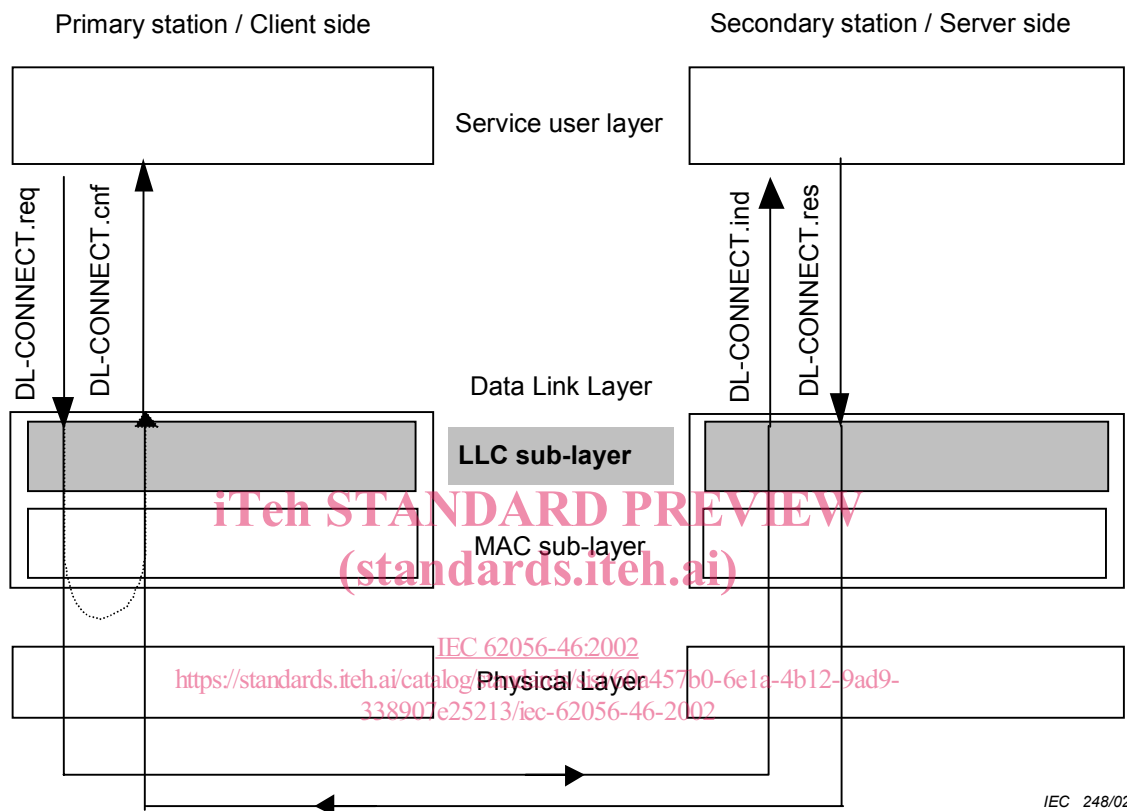


Figure 1 – Data Link (LLC) services for setting up the Data Link Connection

Data link connection establishment can only be requested by the primary station, so the DL-CONNECT.request and .confirm services are provided only at the client (primary station) side. On the other hand, the DL-CONNECT.indication and .response services are provided only at the server (secondary station) side.

The DL-CONNECT.request service primitive – in case of a locally detected error – can be also locally confirmed.

All these services are in fact, provided by the MAC sub-layer: the LLC sub-layer shall transparently transmit these services to/from the “real” service provider MAC sub-layer as the appropriate MA-CONNECT.xxx service primitive.

5.2.1.1 DL-CONNECT.request

Function

This service primitive is provided only at the client side. The Service User layer invokes this primitive to request set-up of a data link connection.

Service parameters

The semantics of the primitive is as follows:

```
DL-CONNECT.request
(
  Destination_MSAP1,
  Source_MSAP,
  User_Information
)
```

The Destination_MSAP and Source_MSAP parameters identify the referenced data link layer connection. The addressing scheme for the MAC layer is discussed in 6.4.2. The specification of the contents of the optional User_information parameter is not within the scope of this standard.

Use

The client side Service User layer entity invokes the DL-CONNECT.request primitive, when it wants to set up a connection with a peer data link layer.

5.2.1.2 DL-CONNECT.indication

Function

This service primitive is provided only at the server side. The LLC sub-layer uses this primitive to indicate to the Service User layer that the peer data link layer requested a Data Link connection.

ITeH STANDARD PREVIEW
(standards.iteh.ai)

Service parameters

The semantics of the primitive is as follows:

```
DL-CONNECT.indication
(
  Destination_MSAP,
  Source_MSAP,
  User_Information
)
```

The Destination_MSAP and Source_MSAP identify the referenced data link layer connection. The addressing scheme for the MAC layer is discussed in 6.4.2. The specification of the contents of the optional User_information parameter is not within the scope of this standard.

Use

The server side LLC sub-layer generates this primitive following the reception of an MA-CONNECT.indication primitive from the MAC sub-layer.

5.2.1.3 DL-CONNECT.response

Function

This service primitive is provided only at the server side. The Service User layer invokes this service primitive in order to indicate to the local data link layer whether the previously proposed data link connection can be accepted by the service user layer or not.

Service parameters

The semantics of the primitive is as follows:

¹) MSAP in this environment is equal to the HDLC address.

```
DL-CONNECT.response
(
  Destination_MSAP,
  Source_MSAP,
  Result,
  User_Information
)
```

The Destination_MSAP and Source_MSAP parameters identify the referenced data link layer connection. The Result parameter (OK, NOK, NO_RESPONSE) indicates whether the proposed connection could be accepted or not, and whether a response frame should be sent or not.

- Result == OK. This means that the received connect request can be accepted by the service user layer.
- Result == NOK. This means that the received connect request cannot be accepted by the service user layer.
- RESULT == NO_RESPONSE: This means that no response to the DL-CONNECT.indication shall be sent.

The User_Information parameter may be present only when the Result is NOK. The specification of its content is not within the scope of this standard.

NOTE The Result parameter indicates only whether the Data Link Connection can or cannot be accepted by the service user higher layers. The data link layer itself may refuse a proposed connection, (e.g. because it supports only one connection at a given moment, thus it is not able to support a second one) even if the higher layers could accept it (Result==OK).

(standards.iteh.ai)

Use

The server side Service User layer entity invokes the DL-CONNECT.response primitive to indicate the result of a previously received request for connection.

5.2.1.4 DL-CONNECT.confirm

Function

This service primitive is provided only at the client side and it can be originated remotely or locally. The data link layer generates this primitive to indicate to the Service User layer the result of a previously received DL-CONNECT.request service.

Service parameters

The semantics of the primitive is as follows:

```
DL-CONNECT.confirm
(
  Destination_MSAP,
  Source_MSAP,
  Result,
  User_Information
)
```

The Destination_MSAP and Source_MSAP parameters reference data link layer connection, which is confirmed by the service. The Result parameter (OK, NOK-REMOTE, NOK-LOCAL, NO_RESPONSE) indicates the result of the previously invoked DL-CONNECT.request service.

- Result == OK. This means that the connect request was accepted by the remote station.
- Result == NOK-REMOTE. This means that the connect request was not accepted by the remote station.

- Result == NOK-LOCAL. This means that a local error has occurred, for example the service user layer tried to establish an already existing data link connection.
- RESULT == NO_RESPONSE. This means that there was no response from the remote station to the connect request.

The User_Information parameter is present only when the Result is NOK-REMOTE. The specification of its content is not within the scope of this standard.

Use

The LLC sub-layer indicates the reception of an MA-CONNECT.confirm primitive to the Service User layer by using this primitive.

5.2.2 Disconnecting the Data Link Connection

5.2.2.1 Overview

Figure 2 shows the services provided by the client and server side data link layers to the Service User layer for disconnecting a Data Link connection.

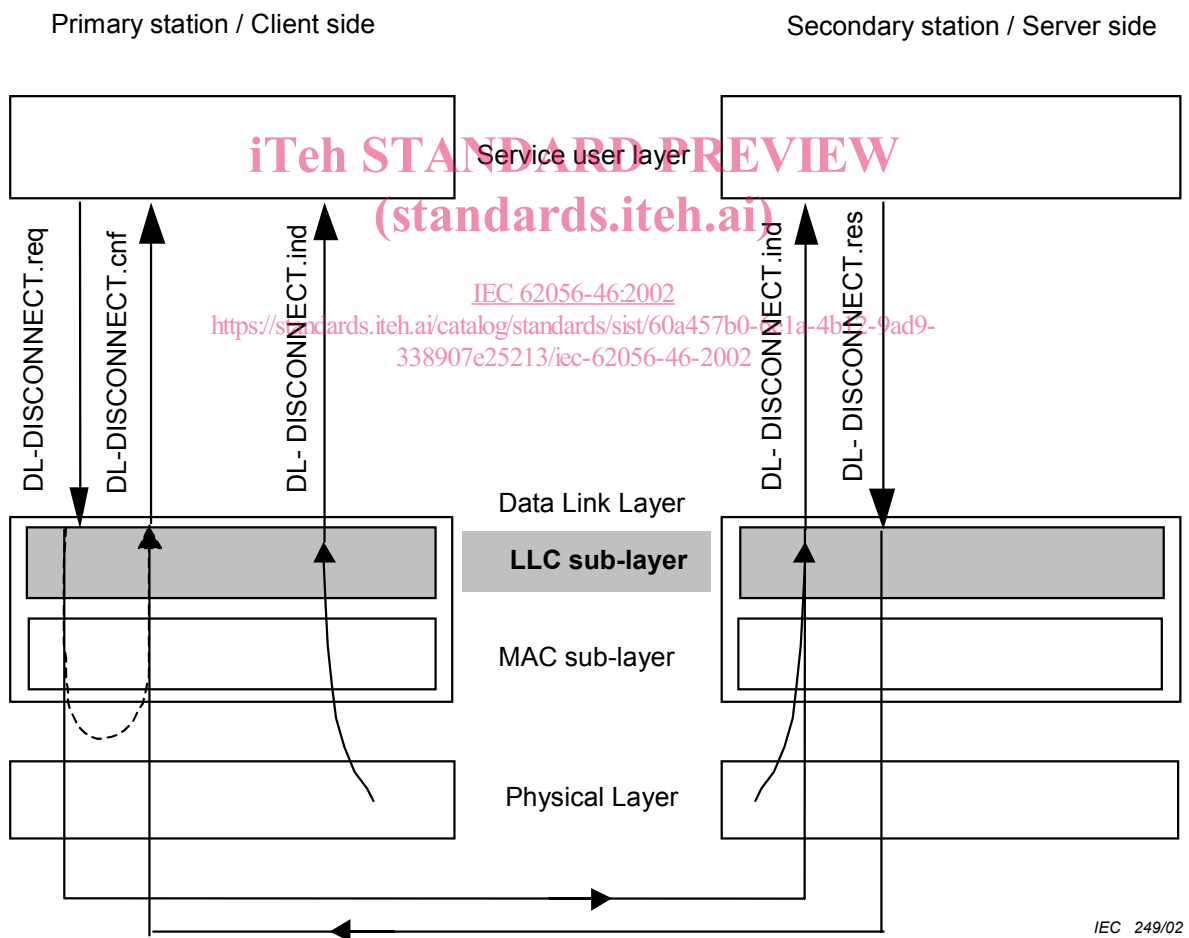


Figure 2 – Data Link (LLC) services for disconnecting the Data Link Connection

Data link disconnection can only be requested by the client device, so the DL-DISCONNECT.request and .confirm services are provided only at the client side. On the other hand, the remotely initiated (by the client) DL-DISCONNECT.indication and .response services are provided only at the server side.

NOTE When this data link layer is used together with the COSEM application layer as defined in IEC 62056-53, DL-DISCONNECT services are used to release existing Application Associations.