



SLOVENSKI STANDARD

SIST EN 300 449 V1.2.1:2004

01-oktober-2004

8 cglrcd`]b`hYfa]bU]`f5 HŁ!`5 bUc[b]`&!ÿ] b]`nU_i d`^Yb]`j cX]`n[cj cfbc`dUgcj bc
ý]f]bc`]b`dcgYVbc`_U_cj cglrc`f5 &GL!`Df]`^`f]h] YbY`nbU]`bcgh]`]b`ca fYyb]`j a Ygb]

Access and Terminals (AT); Special quality voice bandwidth 2-wire analogue leased line (A2S); Connection characteristics and network interface presentation

iteh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: ^{SIST EN 300 449 V1.2.1:2004} **EN 300 449 Version 1.2.1**
<https://standards.iteh.ai/catalog/standards/sist/8a9531a7-6dd8-40d5-a103-2ecb67eb2aae/sist-en-300-449-v1-2-1-2004>

ICS:

33.040.50 Vodi, zveze in tokokrogi Lines, connections and circuits

SIST EN 300 449 V1.2.1:2004 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 449 V1.2.1:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/8a9331a7-6dd8-40d5-a103-2ecb67eb2aae/sist-en-300-449-v1-2-1-2004>

ETSI EN 300 449 V1.2.1 (2001-07)

European Standard (Telecommunications series)

**Access and Terminals (AT);
Special quality voice bandwidth
2-wire analogue leased line (A2S);
Connection characteristics and
network interface presentation**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 449 V1.2.1:2004](https://standards.iteh.ai/catalog/standards/sist/8a9331a7-6dd8-40d5-a103-2ecb67eb2aae/sist-en-300-449-v1-2-1-2004)

<https://standards.iteh.ai/catalog/standards/sist/8a9331a7-6dd8-40d5-a103-2ecb67eb2aae/sist-en-300-449-v1-2-1-2004>



Reference

REN/AT-010002

Keywords

ONP, leased line

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 449 V1.2.1:2004

<https://standards.iteh.ai/catalog/standards/sist/8a9331a7-6dd8-40d5-a103-2ecb67eb2aae/sist-en-300-449-v1-2-1-2004>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword	5
Introduction	5
1 Scope	6
2 References	6
3 Definitions, symbols and abbreviations	7
3.1 Definitions	7
3.2 Symbols and abbreviations	7
4 Requirements	8
4.1 Connection characteristics	8
4.1.1 Tabulation of connection characteristics	8
4.1.2 Overall loss	9
4.1.3 Loss/frequency distortion	9
4.1.4 Transmission signals	10
4.1.4.1 Maximum mean input power	10
4.1.4.2 Maximum instantaneous power	10
4.1.4.3 Maximum power in a 10 Hz bandwidth	10
4.1.4.4 Maximum input power outside the voice band	10
4.1.5 Transmission delay	10
4.1.6 Group delay distortion	11
4.1.7 Variation of overall loss with time	12
4.1.7.1 Amplitude hits	12
4.1.7.2 Other variations	12
4.1.8 Random circuit noise	12
4.1.9 Impulsive noise	13
4.1.10 Phase jitter	13
4.1.11 Distortion	13
4.1.11.1 Quantizing distortion	13
4.1.11.2 Total distortion	13
4.1.12 Single tone interference	13
4.1.13 Frequency error	14
4.1.14 Harmonic distortion	14
4.1.15 Echo and stability	14
4.1.15.1 Echo	14
4.1.15.1.1 Echo control devices	14
4.1.15.1.2 Talker echo	14
4.1.15.1.3 Listener echo	14
4.1.15.2 Stability	14
4.2 Interface presentation	14
4.2.1 Connector specification	15
4.2.2 Hardwired presentation	15
4.2.3 Return loss	15
4.2.4 Power feeding	16
4.3 Safety	16
4.4 Overvoltage	16
4.5 ElectroMagnetic Compatibility (EMC)	16
4.6 Availability	16
Annex A (normative): Test methods	17
A.1 General	17
A.1.1 Equipment connection	17
A.1.2 Reference impedance	17
A.1.3 Non-reactive line termination	18

A.1.4	Measurement frequency.....	18
A.2	Test methods	18
A.2.1	Overall loss	18
A.2.2	Loss/frequency distortion and maximum mean input power	19
A.2.3	Maximum instantaneous power.....	19
A.2.4	Group delay distortion.....	20
A.2.5	Amplitude hits.....	20
A.2.6	Random circuit noise	21
A.2.7	Impulsive noise	21
A.2.8	Phase jitter	22
A.2.9	Total distortion.....	22
A.2.10	Single tone interference	23
A.2.11	Frequency error	23
A.2.12	Harmonic distortion.....	24
A.2.13	Stability	24
A.2.14	Return loss	25
A.2.15	Power feeding	26
Annex B (informative): Weighted return loss measurements		27
B.1	Introduction.....	27
B.2	Weighting function	27
B.2.1	Calculation (trapezoidal rule).....	27
B.2.2	Calculation (tabulated data).....	28
Annex C (informative): Overall loss and quantizing distortion		29
C.1	Introduction.....	29
C.2	Overall loss.....	30
C.3	Quantizing distortion	31
Annex D (informative): Availability		32
D.1	General.....	32
D.1.1	Unavailability.....	32
D.1.2	Availability	32
D.2	Definition of unavailability periods	32
D.3	Availability figures	34
Annex E (informative): Bibliography.....		35
History		36

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Access and Terminals (AT).

The present document resulted from a mandate from the Commission of the European Community (CEC) to provide standards for support of the Directive on Open Network Provision (ONP) of leased lines (92/44/EEC).

There is another standard directly related to the present document:

- EN 300 450: "Access and Terminals (AT); Ordinary and Special quality voice bandwidth 2-wire analogue leased lines (A2O and A2S); Terminal equipment interface".

The present document is based on information from ITU-T Recommendations and ETSI publications and the relevant documents are quoted where appropriate.

SIST EN 300 449 V1.2.1:2004

<https://standards.iteh.ai/catalog/standards/sist-en-300-449-v1-2-1-2004> **National transposition dates** [dd8-40d5-a103-2ccb67cb2aac/sist-en-300-449-v1-2-1-2004](https://standards.iteh.ai/catalog/standards/sist-en-300-449-v1-2-1-2004)

Date of adoption of this EN:	29 June 2001
Date of latest announcement of this EN (doa):	30 September 2001
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 March 2002
Date of withdrawal of any conflicting National Standard (dow):	31 March 2002

Introduction

The Council Directive on the application of ONP to leased lines (92/44/EEC) (see annex E) concerns the harmonization of conditions for open and efficient access to, and use of, the leased lines provided over public telecommunications networks, and the availability throughout the European Union (EU) of a minimum set of leased lines with harmonized technical characteristics.

The consequence of the Directive is that telecommunications organizations within the EU shall make available a set of leased lines within and between points in these countries with specified connection characteristics and specified interfaces. Under the Directive 91/263/EEC (see annex E), later replaced by 98/13/EC (see annex E), terminal equipment for connection to these leased lines was required to fulfil certain essential requirements.

The present version of the present document has been produced to introduce some necessary changes.

ITU-T Recommendation M.1020 (see annex E) was used as the basis for the connection characteristics.

1 Scope

The present document specifies the technical requirements and test principles for the connection characteristics and the physical and electrical characteristics (except safety, overvoltage and EMC aspects) of the network interface presentation of special quality, voice bandwidth, 2-wire, analogue leased lines, provided as part of the minimum set under the Council Directive on the application of Open Network Provision (ONP) to leased lines (92/44/EEC) (see annex E).

A connection is presented via interfaces at Network Termination Points (NTPs) and includes any equipment that may provide the NTP. Signals between terminal equipments are subject to impairments during their transfer over the connection. The limits to these impairments are stated in the present document although in practice the overall performance may be considerably better.

The leased line provides access to the voice bandwidth (300 Hz to 3 400 Hz) with no restrictions on the use of the frequencies. The requirements of the present document have been chosen primarily for the transmission of data between terminal equipments without equalizers although there is no restriction on the use of the leased line for other types of traffic.

The present document is applicable to leased lines, including part time leased lines, for which the establishment or release does not require any protocol exchange or other intervention at the NTP.

The tests specified in the present document cannot be carried out, nor can performance be monitored by the leased line provider, while the leased line is in service, i.e. carrying user's traffic. Thus the tests are designed for bringing into and returning into service although there is no obligation to perform these tests each time the leased line is brought into or returned into service.

The present document covers the physical, mechanical and electrical characteristics of the network interface and specifies the conformance tests for the connection characteristics and network interface. Some of the tests described in the present document are not designed to be applied to the interface of an installed leased line; such tests may be applied to equipment of the kind used to provide the interface.

The present document does not include details concerning the implementation of the tests nor does it include information on any regulations concerning testing.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] ITU-T Recommendation O.71 (1988): "Impulsive noise measuring equipment for telephone-type circuits".
- [2] ITU-T Recommendation O.81 (1988): "Group-delay measuring equipment for telephone-type circuits".
- [3] ITU-T Recommendation O.91 (1988): "Phase jitter measuring equipment for telephone-type circuits".
- [4] ITU-T Recommendation O.95 (1988): "Phase and amplitude hit counters for telephone-type circuits".
- [5] ITU-T Recommendation O.132 (1988): "Quantizing distortion measuring equipment using a sinusoidal test signal".

- [6] ISO/IEC 8877 (1992): "Information technology. Telecommunications and information exchange between systems. Interface connector and contact assignments for ISDN Basic Access Interface located at reference points S and T".
- [7] ITU-T Recommendation O.41 (1994): "Psophometer for use on telephone-type circuits".
- [8] ETSI EN 300 450: "Access and Terminals (AT); Ordinary and Special quality voice bandwidth 2-wire analogue leased lines (A2O and A2S); Terminal equipment interface".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

group delay: measure of the propagation time through the leased line. For a given frequency it is equal to the first derivative of the phase shift through the leased line, measured in radians, with respect to the angular frequency measured in radians per second

group delay distortion: difference between group delay at a given frequency and minimum group delay, in the frequency band of interest

leased lines: telecommunications facilities provided by a public telecommunication network that provide defined transmission characteristics between network termination points and that do not include switching functions that the user can control, (e.g. on-demand switching)

Network Termination Point (NTP): all physical connections and their technical access specifications which form part of the public telecommunications network and are necessary for access to and efficient communication through that public network

reference impedance Z_R : complex impedance made up of a resistance of 270 Ω in series with a parallel combination of 750 Ω and 150 nF. See also clause A.1.2

terminal equipment: equipment intended to be connected to the public telecommunication network; i.e.:

- to be connected directly to the termination of a public telecommunication network; or
- to interwork with a public telecommunication network being connected directly or indirectly to the termination of a public telecommunication network,

in order to send, process, or receive information.

voice bandwidth: band of frequencies over the range 300 Hz to 3 400 Hz

3.2 Symbols and abbreviations

For the purposes of the present document, the following symbols and abbreviations apply:

a	Return loss in dB
$a(f)$	Return loss at frequency f in dB
a_w	Weighted return loss in dB
$A(f)$	Return loss at frequency f expressed as a ratio
A2S	Special quality voice bandwidth 2-wire analogue leased line
ADPCM	Adaptive Differential Pulse Coded Modulation
EMC	ElectroMagnetic Compatibility
f	frequency
NTP	Network Termination Point
ONP	Open Network Provision

qdu	quantizing distortion unit
rms	root mean square
Z_R	Reference impedance

4 Requirements

4.1 Connection characteristics

The special quality voice bandwidth 2-wire analogue leased line is a bidirectional line, configured point-to-point, nominally covering the voice bandwidth. The connection is, in general, symmetrical, i.e. each direction of transmission has the same nominal characteristics, although the actual values are independent.

4.1.1 Tabulation of connection characteristics

The parameters defining the characteristics of the connection are given in table 1. These characteristics define the service offered.

Table 1: Network performance characteristics

Description	Nature	Reference clause
Overall loss	$0 \leq \text{overall loss} \leq 17 \text{ dB}$	4.1.2
Loss/frequency distortion	table 2, figure 1	4.1.3
Transmission signals		4.1.4
- maximum mean input power	-9 dBm	4.1.4.1
- maximum instantaneous power	+4 dBm	4.1.4.2
- maximum power in a 10 Hz bandwidth	no requirement	4.1.4.3
- maximum input power outside voice band	no requirement	4.1.4.4
Transmission delay		4.1.5
- terrestrial (for distance G in kilometres)	$< (15 + 0.01 G) \text{ ms}$	
- via satellite	$< 350 \text{ ms}$	
Group delay distortion	table 3, figure 3	4.1.6
Variation of overall loss with time		4.1.7
- amplitude hits	≤ 10 in a 15 minute period	4.1.7.1
- other variations	$\pm 4 \text{ dB}$ of that at 1 020 Hz	4.1.7.2
Random circuit noise	$< -41 \text{ dBm0p}$ (see note)	4.1.8
Impulsive noise	≤ 18 peaks $\geq -21 \text{ dBm0}$ in a 15 minute period (see note)	4.1.9
Phase jitter	$\leq 10^\circ$ peak to peak	4.1.10
Total distortion		4.1.11
- quantizing distortion	$\leq 3 \text{ qdu}$; no ADPCM	4.1.11.1
- total distortion	$> 28 \text{ dB}$ signal to distortion ratio	4.1.11.2
Single tone interference	$\leq -44 \text{ dBm0}$ (see note)	4.1.12
Frequency error	$\leq \pm 5 \text{ Hz}$	4.1.13
Harmonic distortion	$\geq 25 \text{ dB}$ below fundamental	4.1.14
Echo and stability		4.1.15
- Echo control devices	no echo control	4.1.15.1.1
- Talker echo	$> 10 \text{ dB}$	4.1.15.1.2
- Listener echo	$> 20 \text{ dB}$	4.1.15.1.3
- Stability	0 to 4 kHz	4.1.15.2

NOTE: Where the output relative level is not defined, an alternative value is specified in the reference clause.

4.1.2 Overall loss

Requirement: The overall loss, including long term variations, presented to a signal frequency of 1 020 Hz sent at a power level of -9 dBm in each direction of transmission with the line terminated in 600 Ω at each end shall be in the range:

$$0 \leq \text{overall loss} \leq 17 \text{ dB}$$

NOTE: The overall loss in each direction can be different.

Test: The test shall be conducted according to clause A.2.1.

4.1.3 Loss/frequency distortion

Requirement: The overall loss relative to that defined in clause 4.1.2 above for the connection, presented to a signal sent at a power level of -9 dBm with the line terminated in 600 Ω at each end shall lie between the limits given in table 2 and figure 1.

Below 300 Hz and above 3 600 Hz the relative loss shall not be less than -2 dB and 0 dB respectively, but is otherwise unspecified.

Table 2: Limits for loss of the circuit relative to that at 1 020 Hz

Point (see figure 1)	Upper limit		Point (see figure 1)	Lower limit	
	Frequency Hz	Relative loss dB		Frequency Hz	Relative loss dB
A	300	6	G	500	-2
B	500	6	H	500	-1
C	500	3	I	2 800	-1
D	2 800	3	J	2 800	-2
E	2 800	6	K	3 600	-2
F	3 000	6	L	3 600	0

<https://standards.iteh.ai/catalog/standards/sist/8a9331a7-6dd8-40d5-a103-2ecb67eb2aae/sist-en-300-449-v1-2-1-2004>

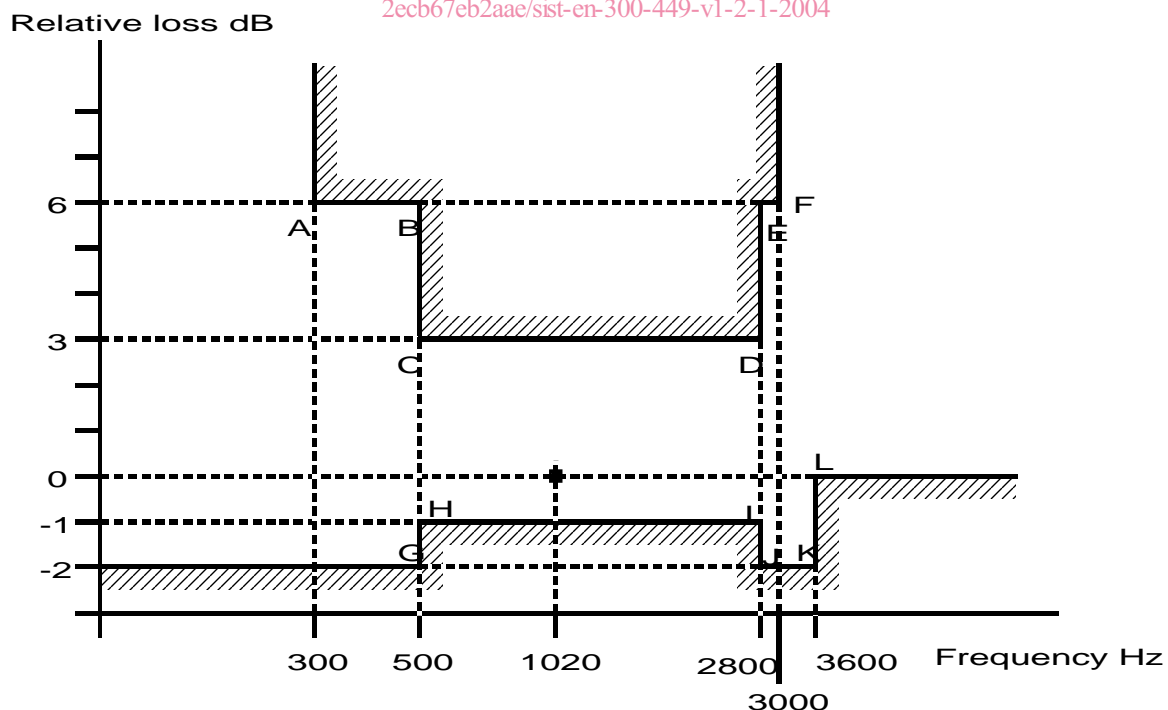


Figure 1: Limits for loss of the circuit relative to that at 1 020 Hz

Test: The test shall be conducted according to clause A.2.2.

4.1.4 Transmission signals

4.1.4.1 Maximum mean input power

Requirement: The leased line shall be capable of carrying any signal presented at the input at a one minute mean power level of -9 dBm within a voice bandwidth of 300 Hz to 3 400 Hz with the line terminated in 600 Ω at each end.

Test: The test shall be conducted according to clause A.2.2.

4.1.4.2 Maximum instantaneous power

Requirement: The leased line shall be capable of carrying a signal at the input having a maximum value equal to an instantaneous power which is 13 dB above the mean value of -9 dBm (i.e. +4 dBm).

NOTE: This value is based upon a provisional ITU-T value. See ITU-T Recommendation V.2 (see annex E).

Test: The test shall be conducted according to clause A.2.3.

4.1.4.3 Maximum power in a 10 Hz bandwidth

There is no requirement for maximum power in a 10 Hz bandwidth.

NOTE: However, there is a corresponding requirement on the terminal equipment specified in EN 300 450 [8].

4.1.4.4 Maximum input power outside the voice band

NOTE: The leased line interface is not suitable for the handling of signals below 300 Hz and above 3 400 Hz. Out of band signals from the terminal equipment are limited to avoid trouble in the network (see terminal equipment interface requirement in EN 300 450 [8]).

4.1.5 Transmission delay

<https://standards.iteh.ai/catalog/standards/sist/8a9331a7-6dd8-40d5-a103-7eb67eb7aa9/sist-en-300-449-v1-2-1-2004>

Requirement: The requirement depends upon whether satellite transmission is involved in the connection or not:

- a) for connections where satellite transmission is not involved the one way end-to-end delay shall be less than $(15 + 0,01 G)$ ms, where G is the geographical distance in kilometres, as shown in figure 2; or
- b) for connections where satellite transmission is involved the one way end-to-end delay shall be less than 350 ms.

NOTE: Requirements a) and b) are based on clauses A.2 and A.3 of ITU-T Recommendation G.114 (see annex E) with suitable adjustment to requirement a) to allow for the possible use of loaded cable.