



Designation: ~~F2105--18~~ **F2105 – 21**

An American National Standard

# Standard Test Method for Measuring Air Performance Characteristics of Vacuum Cleaner Motor/Fan Systems<sup>1</sup>

This standard is issued under the fixed designation F2105; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

## 1. Scope

1.1 This test method covers procedures for determining air performance characteristics of series universal motor/fan systems used in commercial and household upright, canister, stick, hand-held utility, combination-type vacuum cleaners, and household central vacuum cleaning systems.

1.2 These tests and calculations include determination of suction, airflow, air power, maximum air power, and input power under specified operating conditions.

NOTE 1—For more information on air performance characteristics, see References (1) through (2).<sup>2</sup>

1.3 The values stated in inch-pound units are to be regarded as the standard. The values given in parentheses are for information only.

1.4 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.5 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

## 2. Referenced Documents

### 2.1 ASTM Standards:<sup>3</sup>

- E1 Specification for ASTM Liquid-in-Glass Thermometers
- E177 Practice for Use of the Terms Precision and Bias in ASTM Test Methods
- E691 Practice for Conducting an Interlaboratory Study to Determine the Precision of a Test Method
- E2251 Specification for Liquid-in-Glass ASTM Thermometers with Low-Hazard Precision Liquids
- F431 Specification for Air Performance Measurement Plenum Chamber for Vacuum Cleaners

### 2.2 AMCA Standard:<sup>4</sup>

- 210-85 Laboratory Methods of Testing Fans for Rating

<sup>1</sup> This test method is under the jurisdiction of ASTM Committee F11 on Vacuum Cleaners and is the direct responsibility of Subcommittee F11.22 on Air Performance. Current edition approved Oct. 1, 2018; Feb. 1, 2021. Published October 2018; February 2021. Originally approved in 2001. Last previous edition approved in 2017 as F2105 – 17; F2105 – 18. DOI: 10.1520/F2105-18; 10.1520/F2105-21.

<sup>2</sup> The boldface numbers in parentheses refer to the list of references appended to this test method.

<sup>3</sup> For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

<sup>4</sup> Available from Air Movement and Control Association, Inc., 30 West University Dr., Arlington Heights, IL 60004-1893; 60004-1893, <http://www.amca.org>.

2.3 IEC Standard:<sup>5</sup>

IEC 62885-2 Surface Cleaning Appliances – Part 2: Dry Vacuum Cleaners for Household or Similar Use – Methods for Measuring the Performance

### 3. Terminology

#### 3.1 Definitions:

3.1.1 *air power, AP, W, n*—in a vacuum cleaner motor/fan system, the net time rate of work performed by an air stream while expending energy to produce an airflow by a vacuum cleaner motor/fan system under specified air resistance conditions.

3.1.2 *corrected airflow, Q, cfm, n*—in a vacuum cleaner motor/fan system, the volume of air movement per unit of time under standard atmospheric conditions.

3.1.3 *input power, W, n*—rate at which electrical energy is absorbed by a vacuum cleaner motor/fan system.

3.1.4 *model, n*—designation of a group of vacuum cleaner motor/fan systems having the same mechanical and electrical construction.

3.1.5 *population, n*—total of all units of a particular model vacuum cleaner motor/fan system being tested.

3.1.6 *repeatability limit (r), n*—value below which the absolute difference between two individual test results obtained under repeatability conditions may be expected to occur with a probability of approximately 0.95 (95 %).

3.1.7 *repeatability standard deviation (S<sub>r</sub>), n*—standard deviation of test results obtained under repeatability conditions.

3.1.8 *reproducibility limit (R), n*—value below which the absolute difference between two test results obtained under reproducibility conditions may be expected to occur with a probability of approximately 0.95 (95 %).

3.1.9 *reproducibility standard deviation (S<sub>R</sub>), n*—standard deviation of test results obtained under reproducibility conditions.

3.1.10 *sample, n*—group of vacuum cleaner motor/fan systems taken from a large collection of vacuum cleaner motor/fan systems of one particular model which serves to provide information that may be used as a basis for making a decision concerning the larger collection.

3.1.11 *standard air density, ρ<sub>std</sub>, lb/ft<sup>3</sup>, n*—atmospheric air density of 0.075 lb/ft<sup>3</sup> (1.2014 kg/m<sup>3</sup>).

##### 3.1.11.1 Discussion—

This value of air density corresponds to atmospheric air at a temperature of 68°F (20°C), 68 °F (20 °C), 14.696 psi (101.325 kPa), and approximately 30 % relative humidity.

3.1.12 *suction, inches of water, n*—in a vacuum cleaner motor/fan system, the absolute difference between ambient and sub-atmospheric pressure.

3.1.13 *test run, n*—definitive procedure that produces the singular result of calculated maximum air power.

3.1.14 *test station pressure, B<sub>p</sub>, inches of mercury, n*—for a vacuum cleaner motor/fan system, the absolute barometric pressure at the test location (elevation) and test time.

##### 3.1.14.1 Discussion—

It is not the equivalent mean sea level value of barometric pressure typically reported by the airport and weather bureaus. It is sometimes referred to as the uncorrected barometric pressure (that is, not corrected to the mean sea level equivalent value). Refer to 5.4 for additional information.

3.1.15 *unit, n*—single vacuum cleaner motor/fan system of the model being tested.

<sup>5</sup> Available from the IEC webstore, webstore.iec.ch, or American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036-10036, <http://www.ansi.org>.

#### 4. Significance and Use

4.1 The test results allow the comparison of the maximum air power at the vacuum cleaner motor/fan system inlet under the conditions of this test method.

#### 5. Apparatus

5.1 *Plenum Chamber*—See Specification **F431** or IEC 62885-2, Section 5.8.3.

5.2 *Water Manometers*, or equivalent instruments. One to measure from 0.0 in. to 6 in. (152.4 mm) in increments of 0.01 in. (0.254 mm), and one with increments of 0.1 in. (2.54 mm) for use in making measurements above 6 in. (152.4 mm). A single instrument having a resolution of 0.01 in. (0.254 mm) over the entire required range may be used instead of two separate instruments.

5.3 *Power analyzer*, to provide measurements accurate to within  $\pm 1\%$ .

5.4 *Barometer*, with an accuracy of  $\pm 0.05$  in. of mercury (1.27 mm of mercury), capable of measuring and displaying absolute barometric pressure, scale divisions 0.02 in. (0.51 mm) or finer.

5.4.1 Mercury barometers, in general, measure and display the absolute barometric pressure. Some corrections may be needed for temperature and gravity. Consult the owner's manual.

5.4.2 When purchasing an aneroid or electronic barometer, be sure to purchase one which displays the absolute barometric pressure, not the mean sea level equivalent barometric pressure value. These types of barometers generally have temperature compensation built into them and do not need to be corrected for gravity.

5.5 *Sharp-Edge Orifice Plates*—See specifications in Specification **F431**.

5.6 *Thermometer*—Solid-stem, ambient thermometer having a range from  $\pm 18$  °F to  $89$  °F (or  $-8$  °C to  $+32$  °C) with graduations in  $0.2$  °F ( $0.1$  °C),  $0.2$  °F ( $0.1$  °C), conforming to the requirements for thermometer  $63$  °F ( $17$  °C)  $63$  °F ( $17$  °C) as prescribed in Specification **E1**. As an alternative, thermometers S63F or S63C, as prescribed in Specification **E2251**, may be used. In addition, thermometric devices such as resistance temperature detectors (RTDs), thermistors, or thermocouples of equal or better accuracy may be used.

5.7 *Psychrometer*—Thermometers graduated in  $0.2$  °F ( $0.1$  °C),  $0.2$  °F ( $0.1$  °C).

5.8 *Voltage, Regulator System*, to control the input voltage to the vacuum cleaner motor/fan system. The regulator system shall be capable of maintaining the vacuum cleaner motor/fan system's rated voltage  $\pm 1\%$  and rated frequency  $\pm 1$  Hz having a wave form that is essentially sinusoidal with 3 % maximum harmonic distortion for the duration of the test.

#### 6. Sampling

6.1 A minimum of three units of the same model vacuum cleaner motor/fan system, selected at random in accordance with good statistical practice, shall constitute the population sample.

6.1.1 To determine the best estimate of maximum air power for the population of the vacuum cleaner motor/fan system model being tested, the arithmetic mean of the maximum air power of the sample from the population shall be established by testing it to a 90 % confidence level within  $\pm 5\%$ .

6.1.2 **Annex A2** provides a procedural example for determining the 90 % confidence level and when the sample size shall be increased.

NOTE 2—See **Annex A2** for method of determining 90 % confidence level.

## 7. Preparation for Test

7.1 Mount the vacuum cleaner motor/fan system unit to the plenum chamber by any convenient method meeting the requirements of 7.1.1 – 7.1.5.1. See Fig. 1 for an example of a motor mounted to the plenum chamber.

7.1.1 The motor/fan system inlet shall be centered with respect to the outlet opening of the plenum chamber.

7.1.2 The motor/fan system inlet shall be mounted to the plenum chamber such that the inlet does not project into the plenum chamber.

7.1.2.1 If necessary, mount the motor/fan system to a standoff pipe, having an inside diameter of 4 in. and suitable length to prevent the motor/fan system inlet from projecting into the plenum chamber. See Fig. 2 for an example.

7.1.3 Secure the motor/fan system unit to the plenum chamber such that it does not rotate when the motor starts.

7.1.4 Seal all leaks between the motor/fan system inlet and the plenum chamber by any convenient means. See Fig. 3 for example of mounting gasket and plate used to create a seal.

7.1.5 For vacuum cleaner motor/fan systems requiring a part from the vacuum cleaner housing to complete the fan chamber, it is acceptable to mount the motor/fan system to this part and in turn mount the fan chamber's inlet to the plenum chamber.

7.1.5.1 It may be necessary to modify the vacuum cleaner housing by any convenient means to allow the fan chamber inlet to be mounted per 7.1 – 7.1.4. The modifications shall not affect performance.

7.2 Connect the motor/fan system to the power supply using a length of cable of sufficient size to maintain rated voltage at the motor/fan system electrical terminals.

7.3 Set the manometers to zero and check all instruments for proper operation.

7.4 Record the test station pressure and the dry-bulb and wet-bulb temperature readings within 6 ft (1.8 m) of the test area. Read the barometric pressure to the nearest 0.02 in. (0.51 mm), and the dry-bulb and wet-bulb temperatures to the nearest 0.2°F (0.1°C)–0.2 °F (0.1 °C).

7.5 Connect a manometer or equivalent instrument to the plenum chamber.

7.6 Connect a power analyzer.



FIG. 1 Motor Mounted to Plenum Chamber



FIG. 2 Example of Standoff Pipe

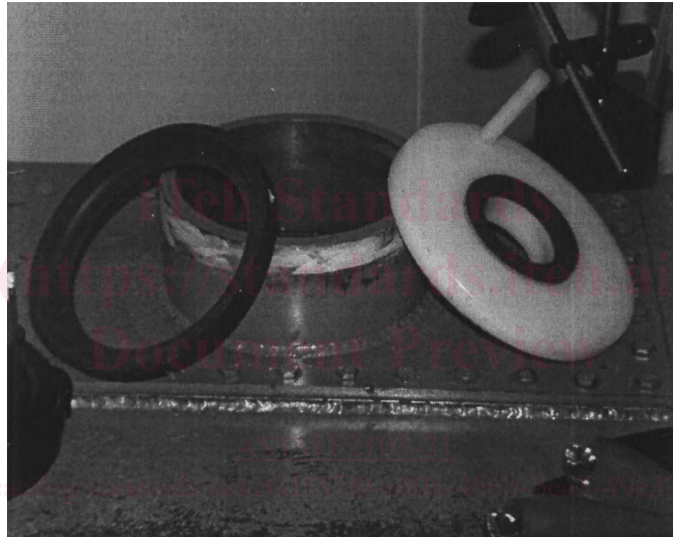


FIG. 3 Mounting Plate and Gasket

<https://standards.iteh.ai/en/standards/astm-f2105-21/astm-f2105-21>

## 8. Test Procedure

8.1 Operate the vacuum cleaner motor/fan system with no orifice plate inserted in the plenum chamber inlet at nameplate rated voltage  $\pm 1\%$  and frequency  $\pm 1\text{ Hz}$  for 1 h prior to the start of the first test run. For vacuum cleaner motor/fan systems with dual nameplate voltage ratings, conduct testing at the highest voltage.

8.2 For each subsequent test run, allow the unit to reach its normal operating temperature by allowing the vacuum cleaner motor/fan system to operate at the open orifice for 1 to 2 min between test runs.

8.3 While operating the vacuum cleaner motor/fan system per 8.2, insert orifice plates sequentially into the orifice plate holder of the plenum chamber starting with the largest size orifice and following it with the next smaller orifice plate. Use the following orifice plates: 2.0, 1.5, 1.25, 1.0, 0.875, 0.75, 0.625, 0.5, 0.375, 0.25 and 0.0 in. (50.8, 38.1, 31.7, 25.4, 22.2, 19.0, 15.8, 12.7, 9.5, 6.3 mm). The following optional orifice plates may also be used: 2.5, 2.25, 1.75, 1.375, 1.125 in. (63.5, 57.2, 44.5, 34.9, 28.6 mm).

8.4 For each orifice plate, record the suction,  $h$ , and input power,  $P$ , in that order. All readings should be taken within 10 s of the orifice insertion. For orifices less than 0.750 in., allow the vacuum cleaner motor/fan system to operate at the open orifice for 15 seconds minimum before inserting the next orifice.

8.4.1 Read the suction to the nearest graduation of the manometer. Readings should be taken as soon as the manometer reaches a true peak. (When using a fluid type manometer, the liquid level may peak, drop, and peak again. The second peak is the true peak reading. A person conducting the test for the first time shall observe at least one run before recording data. See Specification F431 for instructions on how to minimize the overshoot (first peak) of the liquid level.)

## 9. Calculation

### 9.1 Correction of Data to Standard Conditions:

9.1.1 *Air Density Ratio*—The density ratio,  $D_r$ , is the ratio of the air density at the time of test  $\rho_{\text{test}}$ , to the standard air density,  $\rho_{\text{std}} = 0.075 \text{ lb/ft}^3$  (1.2014  $\text{kg/m}^3$ ). It is used to correct the vacuum and wattage readings to standard conditions. Find  $\rho_{\text{test}}$  (lb/ft<sup>3</sup> or  $\text{kg/m}^3$ ) from standard psychometric charts or ASHRAE tables and calculate  $D_r$  as follows:

**TABLE 1 Orifice Flow Coefficient Equations ( $K_1$ )**

NOTE 1— $K_1$  was determined experimentally using an ASTM Plenum Chamber (see Specification F431) and an ASME Flowmeter (see Ref. (1)).

NOTE 2—Equations for  $K_1$ , in terms of  $B_t$  and  $h$  are given in Appendix X6.

Orifice Diameter, inches (mm)	Orifice Flow Coefficient Equation <sup>A</sup>
0.250 (6.3)	$K_1 = \frac{0.5575r - 0.5955}{r - 1.0468}$
0.375 (9.5)	$K_1 = \frac{0.5553r - 0.5754}{r - 1.0263}$
0.500 (12.7)	$K_1 = \frac{0.5694r - 0.5786}{r - 1.0138}$
0.625 (15.8)	$K_1 = \frac{0.5692r - 0.5767}{r - 1.0104}$
0.750 (19.0)	$K_1 = \frac{0.5715r - 0.5807}{r - 1.0138}$
0.875 (22.2)	$K_1 = \frac{0.5740r - 0.5841}{r - 1.0158}$
1.000 (25.4)	$K_1 = \frac{0.5687r - 0.5785}{r - 1.0146}$
1.125 (28.6)	$K_1 = \frac{0.5675r - 0.5819}{r - 1.0225}$
1.250 (31.7)	$K_1 = \frac{0.5717r - 0.5814}{r - 1.0152}$
1.375 (34.9)	$K_1 = \frac{0.5680r - 0.5826}{r - 1.0235}$
1.500 (38.1)	$K_1 = \frac{0.5719r - 0.5820}{r - 1.0165}$
1.750 (44.5)	$K_1 = \frac{0.5695r - 0.5839}{r - 1.0235}$
2.000 (50.8)	$K_1 = \frac{0.5757r - 0.5853}{r - 1.0157}$
2.250 (57.2)	$K_1 = \frac{0.5709r - 0.5878}{r - 1.0279}$
2.500 (63.5)	$K_1 = \frac{0.5660r - 0.59024}{r - 1.0400}$

<sup>A</sup>

$$r = \frac{B_t(0.4912) - h(0.03607)}{B_t(0.4912)}$$

where:

$B_t$  = test station pressure at time of test, inches of mercury, and  
 $h$  = uncorrected suction (manometer reading), in. of water.



$$D_r = \frac{\rho_{test}}{\rho_{std}}$$

where:

$\rho_{test}$  = the air density at the time of test, lb/ft<sup>3</sup> (kg/m<sup>3</sup>), and  
 $\rho_{std}$  = the standard air density, 0.075 lb/ft<sup>3</sup> (1.2014 kg/m<sup>3</sup>).

As an alternative, the following equation is intended to be used for correcting ambient conditions where the barometric pressure exceeds 27 in. (685.8 mm) of mercury and the dry-bulb and wet-bulb temperatures are less than ~~100~~**F100** °F (37.8 °C); and may be used as an alternate method of calculating  $D_r$  (see **Appendix X1** for derivation and accuracy analysis).

$$D_r = \frac{[17.68B_t - 0.001978T_w^2 + 0.1064T_w + 0.0024575B_t(T_d - T_w) - 2.741]}{T_d + 459.7}$$

where:

$B_t$  = test station pressure at time of test, inch of mercury,  
 $T_d$  = dry-bulb temperature at time of test, °F, and  
 $T_w$  = wet-bulb temperature at time of test, °F.

9.1.2 *Corrected Suction*—Corrected suction,  $h_s$ , is the manometer reading,  $h$ , times the correction factor,  $C_s$ , as follows:

$$h_s = C_s h$$

9.1.2.1 For series universal motor/fan systems (see Ref (2)) the correction factor,  $C_s$ , is calculated as follows:

$$C_s = 1 + 0.667(1 - D_r)$$

9.1.2.2 This test method does not have any formulas available for correcting suction for any other type of motor (permanent magnet, induction, and so forth).

9.1.3 *Corrected Input Power*—Corrected input power,  $P_s$ , expressed in watts, is the wattmeter reading,  $P$ , times the correction factor,  $C_p$ , as follows:

$$P_s = C_p P$$

<https://standards.iteh.ai/catalog/standards/sist/c0d55710-a00a-466b-bea3-49e37815a91d/astm-f2105-21>

9.1.3.1 For series universal motor/fan systems the correction factor,  $C_p$ , is calculated as follows:

$$C_p = 1 + 0.5(1 - D_r)$$

9.1.3.2 This standard does not have any formulas available for correcting input power for any other types of motor (permanent magnet, induction, and so forth).

9.2 *Corrected Airflow*—Calculate the corrected airflow,  $Q$ , expressed in ft<sup>3</sup>/min (see **Note 3** and **Appendix X2**) as follows:

$$Q = 21.844D^2K_1\sqrt{h_s}$$

where:

$Q$  = corrected flow, cfm,  
 $D$  = orifice diameter, in.,  
 $K_1$  = constant (dimensionless), orifice flow coefficients for orifices in the plenum chamber. See **Table 1** for values for each orifice. See Ref. (1) for the derivation of these flow coefficients, and  
 $h_s$  = corrected suction, in. of water.

NOTE 3—For the corrected airflow expressed in litres per second, use the following equation:

$$Q = 10.309D^2K_1\sqrt{h_s}$$

where:

- $Q$  = corrected flow, L/s,
- $D$  = orifice diameter, m,
- $K_f$  = constant (dimensionless), and
- $h_s$  = corrected suction, Pa.

9.3 *Air Power*—Calculate the air power,  $AP$ , in W, as follows:

$$AP = 0.117354 (Q)(h_s)$$

where:

- $AP$  = air power, W,
- $Q$  = corrected flow, cfm, and
- $h_s$  = corrected suction, inches of water.

(See [Appendix X3](#) for derivation.)

9.4 *Maximum Air Power*—Determine the maximum air power using the method in [Annex A1](#).

## 10. Report

10.1 For each vacuum cleaner motor/fan system sample from the population being tested, report the following information:

10.1.1 Manufacturer's name and motor/fan system model name or number, or both.

10.1.2 Type of motor/fan system; that is, filter first, fan first, and so forth.

10.1.3 The test setup (that is, mounted flush or with standoff pipe) at which the test was conducted.

10.1.4 The corrected input power, corrected vacuum, corrected airflow, and air power for each orifice used.

10.1.5 Calculated or measured maximum air power, whichever is greater.

## 11. Precision and Bias

11.1 The following precision statements are based on interlaboratory tests involving six laboratories and seven units.

11.2 The statistics have been calculated as recommended in Practice [E691](#).

11.3 The following statements regarding repeatability limit and reproducibility limit are used as directed in Practice [E177](#).

11.4 The coefficients of variation of repeatability and reproducibility of the measured results have been derived from seven sets of data, where each of the sets have been performed by a single analyst within each of the six laboratories on separate days using the same test samples.<sup>6</sup>

11.5 *Repeatability (Single Operator and Laboratory, Multiday Testing)*—The ability of a single analyst to repeat the test within a single laboratory.

11.5.1 The expected coefficient of variation of the measured results within a laboratory,  $CV\%$ , has been found to be 1.25.

11.5.2 The 95 % repeatability limit within a laboratory,  $r$ , has been found to be, where  $r = 3.49\%$  ( $CV\%$ ).

11.5.3 With 95 % confidence, it can be stated that within a laboratory, a set of measured results derived from testing a unit should be considered suspect if the percent difference between any two of the three values is greater than the respective value of the repeatability limit,  $r$  (see [Note 4](#)).

<sup>6</sup> Supporting data have been filed at ASTM International Headquarters and may be obtained by requesting Research Report RR:F11-1015. Contact ASTM Customer Service at [service@astm.org](mailto:service@astm.org).



NOTE 4—The % difference = [(larger-smaller)/larger] × 100.

11.5.4 If the absolute value of the difference of any pair of measured results from three test runs performed within a single laboratory is not equal to or less than the respective repeatability limit,  $r$ , that set of results shall be considered suspect.

11.6 *Reproducibility (Multiday Testing and Single Operator Within Multilaboratories)*—The ability to repeat the test within multiple laboratories.

11.6.1 The expected coefficient of variation of reproducibility of the average of a set of measured results between multiple laboratories,  $CV \%_R$ , has been found to be 2.91.

11.6.2 The 95 % reproducibility limit within a laboratory,  $R$ , has been found to be, where  $R = 8.16\% (CV \%_R)$ .

11.6.3 With 95 % confidence, it can be stated that the average of the measured results from a set of three test runs performed in one laboratory, as compared to a second laboratory, should be considered suspect if the percent difference between those two values is greater than the respective values of the reproducibility limit,  $R$  (see **Note 4**).

11.7 *Bias*—No justifiable statement can be made on the accuracy of this test method for testing the properties listed. The true values of the properties cannot be established by acceptable referee methods.

## 12. Keywords

12.1 air performance; air power; motor; motor/fan system; vacuum cleaner

iTech Standards  
(<https://standards.iteh.ai>)  
ANNEXES  
Document Preview  
(Mandatory Information)

### A1. MATHEMATICAL METHOD FOR DETERMINING MAXIMUM AIR POWER POINT

<https://standards.iteh.ai/catalog/standards/sist/c0d537f0-a00a-466b-bea3-49e37815a91d/astm-f2105-21>

A1.1 The following, second degree polynomial equation, is assumed to provide the best mathematical approximation of the air power versus airflow relationship. (See Ref. (3) for additional information.)

$$Y = A_1 + A_2X + A_3X^2 \quad (A1.1)$$

where:

$Y$  = air power ( $AP$ ),  
 $X$  = airflow ( $Q$ ), and  
 $A_1, A_2, A_3$  = arbitrary constants

A1.1.1 Use  $X$  and  $Y$  values obtained from only five specific orifices selected as follows:

A1.1.1.1 Using the test data, determine the orifice size that produced the highest air power value.

A1.1.1.2 Use the air power and airflow values at this orifice, and the next two smaller and the next two larger orifices in the following computations:

A1.1.1.3 If the highest air power value calculated from the observed data is at the 2.0 in. (50.8 mm) orifice or larger, then use the air power and airflow values from the five largest orifices.

A1.2 To determine the values of  $A_1, A_2, A_3$ , use the  $X$  and  $Y$  values obtained from the five specified orifices and solve the following set of normalized equations:

$$\begin{aligned}\Sigma Y_i &= NA_1 + A_2 \Sigma X_i + A_3 \Sigma X_i^2 \\ \Sigma X_i Y_i &= A_1 \Sigma X_i + A_2 \Sigma X_i^2 + A_3 \Sigma X_i^3 \\ \Sigma X_i^2 Y_i &= A_1 \Sigma X_i^2 + A_2 \Sigma X_i^3 + A_3 \Sigma X_i^4\end{aligned}$$

where:

$N$  = 5 (number of orifices selected),

$I$  = 1 to  $N$ , and

$X_i$  and  $Y_i$  = the values obtained during testing ( $X_1 Y_1, X_2 Y_2, \dots, X_N Y_N$ ) at the five orifices specified in A1.1.1.

A1.3 Setting the derivative of Eq A1.1 equal to zero and solving for  $X$  will determine the value of  $X_m$  where  $Y$  is at its maximum value ( $Y_{max}$ ) as follows:

$$\frac{dy}{dx} = \frac{d}{dx} [A_1 + A_2 X + A_3 X^2] = 0$$

$$\frac{dy}{dx} = A_2 + 2A_3 X = 0$$

Substitute  $X_m$  as the value of  $X$  and  $Y_{max}$  and solve for  $X_m$ :

$$X_m = -\frac{A_2}{2A_3}$$

Substituting this value of  $X_m$ , and  $A_1, A_2$ , and  $A_3$ , into Eq A1.1 will determine the value of  $Y_{max}$  ( $AP_{max}$ ) as follows:

$$Y_{max} = A_1 + A_2 X_m + A_3 X_m^2$$

#### ASTM F2105-21

A1.4 Calculate the goodness of fit,  $R$  (correlation coefficient) as follows: [466b-bea3-49e37815a91d/astm-f2105-21](https://standards.iteh.ai/466b-bea3-49e37815a91d/astm-f2105-21)

$$R = 1 - \frac{\Sigma (Y_{iOBS} - Y_{iCAL})^2}{\Sigma (Y_{iOBS} - Y_{OBS})^2}$$

where:

$$Y_{iCAL} = A_1 + A_2 X_{iOBS} + A_3 X_{iOBS}^2$$

and:

$$\bar{Y}_{OBS} = \frac{1}{N} \Sigma Y_{iOBS}$$

and:

$i$  = 1 to  $N$  orifices used in section 8.3,

$OBS$  = observed data,

$CAL$  = calculated data, and

$Y_{iOBS}$  = the air power ( $AP$ ) obtained from the calculations in section 9.3 for the corresponding value  $X_{iOBS}$  (airflow,  $Q$ ) at any of the  $N$  orifices selected.

A1.4.1 If  $R$  is not greater than or equal to 0.900, the test must be performed again and the new set of data used.

A1.4.2 The measured or calculated value for maximum air power shall be recorded, whichever is greater.

**A2. DETERMINATION OF 90 % CONFIDENCE INTERVAL**

A2.1 The most common and ordinarily the best estimate of the population mean,  $\mu$ , is simply the arithmetic mean,  $\bar{x}$ , of the individual scores (measurements) of the units comprising a sample taken from the population. The average score of these units will seldom be exactly the same as the population mean; however, it is expected to be fairly close so that in using the following procedure it can be stated with 90 % confidence that the true mean of the population,  $\mu$ , lies within 5 % of the calculated mean,  $\bar{x}$ , of the sample taken from the population as stated in Section 6.

A2.2 The following procedure provides a confidence interval about the sample mean which is expected to bracket  $\mu$ , the true population mean, 100(1- $\alpha$ ) % of the time where  $\alpha$  is the chance of being wrong. Therefore, 1- $\alpha$  is the probability or level of confidence of being correct.

A2.3 The desired level of confidence is 1- $\alpha$  = 0.90 or 90 %. Therefore  $\alpha$  = 0.10 or 10 %.

A2.4 Compute the mean,  $\bar{x}$ , and the standard deviation,  $s$ , of the individual scores of the sample taken from the population:

$$\bar{x} = \frac{1}{n} \sum_{i=1}^n X_i$$

$$s = \sqrt{\frac{n \sum_{i=1}^n X_i^2 - \left(\sum_{i=1}^n X_i\right)^2}{n(n-1)}}$$

where:

$n$  = number of units tested, and

$X_i$  = the value of the individual test unit score of the  $i^{\text{th}}$  test unit. As will be seen in the procedural example to follow, this is the average value of the results from three test runs performed on an individual test unit with the resulting set of data meeting the repeatability requirements.

A2.5 Determine the value of the  $t$  statistic for  $n - 1$  degrees of freedom,  $df$ , from **Table A2.1** at a 95 % confidence level.

NOTE A2.1— The value of  $t$  is defined as  $t_{1-\alpha/2}$  and is read as “ $t$  at 95 % confidence.”

**TABLE A2.1 Percentiles of the  $t$  Distribution**

$df$	$t_{0.95}$
1	6.314
2	2.920
3	2.353
4	2.132
5	2.015
6	1.943
7	1.895
8	1.860
9	1.833
10	1.812
11	1.796
12	1.782
13	1.771
14	1.761
15	1.753