

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –
Part 2-38: Tests – Sealing for fibre optic sealed closures and hardened connectors using air pressure**

Dispositifs d'interconnexion et composants passifs fibroniques – Procédures fondamentales d'essais et de mesures –

Partie 2-38: Essais – Étanchéité des boîtiers scellés fibroniques et des connecteurs durcis fibroniques au moyen d'air comprimé



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2023 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 300 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 19 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –
Part 2-38: Tests – Sealing for fibre optic sealed closures and hardened connectors using air pressure**

Dispositifs d'interconnexion et composants passifs fibroniques – Procédures fondamentales d'essais et de mesures –

Partie 2-38: Essais – Étanchéité des boîtiers scellés fibroniques et des connecteurs durcis fibroniques au moyen d'air comprimé

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.180.20

ISBN 978-2-8322-7297-8

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD..... 3

1 Scope..... 5

2 Normative references 5

3 Terms and definitions 5

4 Test methods..... 6

5 Apparatus..... 6

 5.1 Elements of apparatus 6

 5.2 Pressurizer 6

 5.3 Capillary gas connection 6

 5.4 Pressure gauge 6

 5.5 Water bath 6

6 Procedure..... 7

 6.1 Method A 7

 6.2 Method B 7

7 Severity 8

8 Details to be specified and reported..... 9

Annex A (normative) Test configuration for sealing test of sealed hardened connectors and adaptors..... 10

 A.1 General description for sealing test..... 10

 A.2 Example of a test configuration for method A..... 10

 A.3 Example of a test configuration for method B..... 11

Bibliography..... 13

Figure 1 – Configuration for method A 7

Figure 2 – Configuration for method B 8

Figure A.1 – Example of a test configuration for method A..... 11

Figure A.2 – Example of a test configuration for method B..... 12

Table 1 – Recommended severities 9

<https://standards.iteh.ai/catalog/standards/iec/61300-2-38-2023>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –**Part 2-38: Tests – Sealing for fibre optic sealed closures and hardened connectors using air pressure**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61300-2-38 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

This third edition cancels and replaces the second edition published in 2006. It constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) addition of sealed hardened connectors;
- b) recommended test severities from IEC 61753-1;
- c) test configurations for hardened connectors and adaptors.

The text of this standard is based on the following documents:

Draft	Report on voting
86B/4768/FDIS	86B/4783/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts of IEC 61300 series, under the general title *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –

Part 2-38: Tests – Sealing for fibre optic sealed closures and hardened connectors using air pressure

1 Scope

This part of IEC 61300 presents two methods for testing the sealing performance of a fibre optic sealed closure and hardened connector using air pressure.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61300-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 1: General and guidance*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61300-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

hardened fibre optic connector
water and dust tight connector

Note 1 to entry: A hardened fibre optic connector is typically used for a connection in outside plant.

[SOURCE: IEC 61753-1:2018, 3.8]

3.2

sealed closure

watertight and dust-tight housing that can hold a varying overpressure or underpressure caused by temperature changes or atmospheric pressure changes

Note 1 to entry: There is no exchange of air with the outside environment when exposed to temperatures over the specified operating temperature range.

Note 2 to entry: Although often referred to as hermetic sealed closures, humidity can enter the inner closure by diffusion.

Note 3 to entry: Sealed boxes or sealed wall outlets shall be treated as sealed closures.

[SOURCE: IEC 61753-1:2018, 3.17, modified – Note 4 to entry has been deleted.]

4 Test methods

Assemble the protective housings or hardened connectors following the manufacturer's instructions.

The tests shall be carried out at standard atmospheric conditions as defined in IEC 61300-1, unless otherwise specified in the relevant performance specification. The test samples are then sealed, pressurized and tested for leaks by using method A or method B.

Method A is a performance criterion test for leaks when the test sample is pressurized with air, submerged in a water bath, and monitored for any escape of air bubbles. This test method is generally used to check the sealing of the closure or hardened connector after installation of the test sample or after a performance test. In the field, the test is usually done with soap water to check for leaks.

Method B is a performance criterion test for leaks when the test sample is pressurized with air and the pressure loss is monitored by using a gauge. This test method is generally used to check the sealing of the sealed protective housing or sealed hardened connector during mechanical tests at a specified test temperature, by measuring the pressure before and after the test. Since atmospheric pressure can change over time, this test should not exceed the duration of 2 h between the first and the last measurement of the overpressure inside the closure, unless the change in overpressure is compensated by the change in atmospheric pressure during the measurement period.

5 Apparatus

5.1 Elements of apparatus

The apparatus consists of the following elements:

- pressurizer;
- capillary gas connection;
- pressure gauge;
- water bath.

5.2 Pressurizer

The test samples shall be pressurized with a pressurizer. A pressurizer provides means of pressurizing the test samples.

5.3 Capillary gas connection

A suitable capillary gas connection shall fit into the test sample or cable to allow the test sample to be pressurized.

5.4 Pressure gauge

A pressure gauge is a gauge to measure the pressure inside the test sample. Gauges with a suitable range of at least 40 kPa and a resolution of at least 0,1 kPa to determine a 2 kPa drop in pressure shall be used.


5.5 Water bath

A water bath filled with fresh water is used for method A. The water bath shall be deep enough to fully immerse the test samples.

6 Procedure

6.1 Method A

A test configuration for method A is shown in Figure 1.

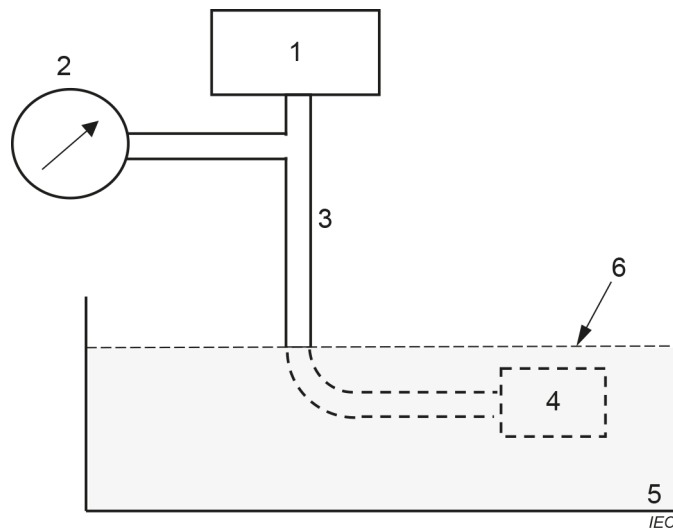

Key

- 1 regulated pressurizer
- 2 pressure gauge, utilized for monitoring the overpressure
- 3 capillary gas connection, utilized for transferring pressurized air to the sealed protective housing
- 4 sealed protective housing
- 5 water bath, utilized for immersing the test sample
- 6 water surface

iTech Standards
<https://standards.iteh.ai/>
 Document Preview
 IEC 61300-2-38:2023
<https://standards.iteh.ai/catalog/standards/iec/61300-2-38-2023/445fe0ddac/iec-61300-2-38-2023>

Figure 1 – Configuration for method A


- a) Prepare the test samples using the smallest and the largest cable diameter for which the test samples are designed.
- b) Install the pressure gauge into the test sample or cable. Make sure that the cable can transfer the overpressure into the test sample.
- c) Seal the open cable ends at their extremities with a cap.
- d) Hardened connectors shall be installed on a sealed closure or pressure vessel and equipped with one or more adaptors or sockets for making a connection with the hardened connector. See Annex A for the test configuration for hardened connectors.
- e) Submerge the test sample and cables in a water bath. Remove the trapped air on the outside of the test sample. Place test sample and cable just below the water surface.

NOTE Immersion of the test sample deep under the water surface could create a higher compression force onto the sealing material and mask potential leak paths.

- f) Pressurize the test sample with the pressurizer. The pressurizer shall remain switched on during the test to provide a constant overpressure in the test sample.
- g) No escape of air bubbles, indicating a leakage, shall be observed for at least 15 min.

6.2 Method B

A test configuration for method B is shown in Figure 2.

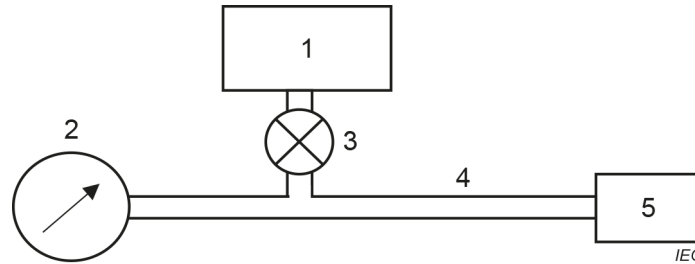

Key

- 1 regulated pressurizer
- 2 pressure gauge, utilized for monitoring the overpressure
- 3 valve to shut off pressurizer once test pressure is stable
- 4 capillary gas connection, utilized for transferring pressurized air to the sealed protective housing
- 5 sealed protective housing

Figure 2 – Configuration for method B

- a) Prepare the test samples using the smallest and the largest cable diameter for which the test samples are designed.
- b) Install the pressure gauge into the test sample or cable. Verify that the air pressure applied to the cable is transferred as overpressure into the test sample.
- c) Seal the open cable ends at their extremities with a cap.
- d) Connect the test sample with the capillary gas connection to the pressurizer. Pressurize the test sample at specified temperature.
- e) Hardened connectors shall be installed on a sealed closure or pressure vessel with an inner volume between 1 dm³ and 5 dm³ and equipped with one or more adaptors or sockets for making a connection with the hardened connector. See Annex A for the test configuration for sealed hardened connectors.

NOTE The additional pressure vessel is not required for method A as pressure remains regulated during the test (no valve to shut off pressurizer).

- f) After the test sample is conditioned at the test pressure and test temperature, the pressurizer shall be isolated from the test sample circuit by closing the valve of the pressurizer output. The air pressure inside the test sample shall be monitored using the installed gauge. Measure and record the pressure before and after the mechanical test at the same test temperature. The pressure in the test sample shall not decay more than the specified amount.

7 Severity

The severity is determined by the initial overpressure, the duration for the test and the allowable leakage or pressure loss during the test.

Table 1 shows the specified test severities in relation to the performance categories. It is recommended to verify the test severities with the relevant IEC 61753 performance standards and IEC 62005 reliability documents for the normative values.

Table 1 – Recommended severities

IEC 61753-1 category	Category description	Test overpressure kPa	Duration for method A min	Maximum allowed pressure loss for method B kPa
C	Indoor environments	20 ± 2	At least 15	2
A	Outdoor aerial environment	20 ± 2	At least 15	2
G	Outdoor ground level environment	20 ± 2	At least 15	2
S	Outdoor subterranean or subsurface environment	40 ± 2	At least 15	2

8 Details to be specified and reported

The following details, as applicable, shall be specified in the relevant specification and shall be reported in the test report:

- number and type of test samples;
- type and diameter of the cable to be used in the test;
- the procedure for mounting the test samples;
- test temperature;
- pre-conditioning of test samples, if any;
- method of leak detection (method A or method B);
- overpressure level;
- duration for method A;
- maximum allowable pressure loss for method B;
- deviations from test procedure;
- additional pass/fail criteria.