



Designation: **D5743–97 (Reapproved 2013) D5743 – 21**

Standard Practice for Sampling Single or Multilayered Liquids, Withwith or Without Solids, in Drums or Similar Containers¹

This standard is issued under the fixed designation D5743; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This practice covers typical equipment and methods for collecting samples of single or multilayered liquids, with or without solids, in drums or similar containers. These methods are adapted specifically for sampling drums having a volume of 110 gal (416 L) or less. These methods are applicable to hazardous material, product, or waste. Specific sample collection and handling requirements should be described in the site-specific work plan.

1.2 The values stated in inch-pound units are to be regarded as standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered standard.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate ~~safety~~ safety, health, and ~~health~~ environmental practices and determine the applicability of regulatory limitations prior to use.* Specific precautionary statements are given in 7.2.4, 7.2.7.1, and Notes 1 and 2.

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 ASTM Standards:²

[D4687 Guide for General Planning of Waste Sampling](#)

[D5088 Practice for Decontamination of Field Equipment Used at Waste Sites](#)

[D5283 Practice for Generation of Environmental Data Related to Waste Management Activities: Quality Assurance and Quality Control Planning and Implementation](#)

[D5495 Practice for Sampling with a Composite Liquid Waste Sampler \(COLIWASA\)](#)

[D5681 Terminology for Waste and Waste Management](#)

2.2 Other Documents:

[Drum Handling Practices at Hazardous Waste Sites](#); [Sites EPA/600/S2-86/013](#), PB 165362, October 1986³

[Accident Prevention Manual](#); [Manual: Engineering and Technology](#) ~~13th~~ 14th Edition, 2009 2015⁴

¹ This practice is under the jurisdiction of ASTM Committee D34 on Waste Management and is the direct responsibility of Subcommittee D34.01.02 on Sampling Techniques.

Current edition approved April 1, 2013 May 1, 2021. Published April 2013 May 2021. Originally approved in 1995. Last previous edition approved in 2008 2013 as D5743 – 97 (2013) (2008); DOI: 10.1520/D5743-97R13-10.1520/D5743-21.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available (for free) at <http://www.epa.gov/nscep>.

⁴ Available from National Safety Council, 1121 Spring Lake Dr., Itasca, IL 60143 and at www.nsc.org.

3. Terminology

3.1 Definitions:

3.1.1 *bonding*—touching the sampling equipment to the drum to form an electrically conductive path to minimize potential electrical differences between the sampling equipment and drum, reducing the buildup of static electricity.

3.1.2 *bung*—usually a 2-in. (5.1-cm) or ¾-in. (1.3-cm) diameter threaded plug designed specifically to close a bung hole.

3.1.3 *bung hole*—an opening in a barrel or drum through which it can be filled, emptied, or vented.

3.1.4 *deheading*—removal of the lid of a closed-head drum; it is usually accomplished with a drum deheader.

3.1.5 *drum*—implicitly any drum, barrel, or non-bulk container of 5 to 110-gal (19 to 416-L) capacity.

3.1.6 *pail*—a small container, usually of 5-gal (19-L) capacity. Pails typically have bungs or spouts, or the entire lid can be removed.

3.1.7 *paperwork*—all required site documentation, which may include the manifests, waste profiles, material safety data sheets (MSDS), site forms, sample labels, seals, and chain-of-custody forms.

3.1.8 *sludge*—any mixture of solids that settles out of solution. Sludges contain liquids that are not apparent as free liquids.

3.1.9 *work plan*—a plan specific to a particular site; it is for conducting activities specified in the plan.

3.1 *Definitions*—For definitions of terms used in this standard, see Terminology [D5681](#).

4. Summary of Practice

4.1 The drum and its contents are inspected, and appropriate sampling equipment is selected. A clean sampling device is lowered slowly into the liquid to be sampled. After the material has entered the device, it is removed from the drum. The contents of the device are discharged into a sample container. The sampling device is then either disposed of or cleaned and decontaminated.

5. Significance and Use

5.1 This practice is intended for use in collecting samples of single and multilayered liquids, with or without solids, from drums or similar containers, including those that are unstable, ruptured, or otherwise compromised. Special handling procedures (for example, remote drum opening, ~~overpressurized~~over-pressurized drum opening, drum deheading, etc.) are described in *Drum Handling Practices at Hazardous Waste Sites*.

6. Interferences

6.1 The condition of the materials to be sampled, and the condition and accessibility of the drums, will have a significant impact on the selection of sampling equipment.

7. Pre-Sampling

7.1 General Principles and Precautions:

7.1.1 Samples should be collected in accordance with an appropriate work plan (Practice [D5283](#) and Guide [D4687](#)). This plan must include a worker health and safety section because there are potential hazards associated with opening drums as well as

⁵ Available from National Institute of Occupational Safety and Health (NIOSH) at 800-356-4674 (hardcopy) or <http://www.osha.gov/publications/complinks/OSHG-Hazwaste/Agency.html> (download) <https://www.cdc.gov/niosh/docs/85-115/pdfs/85-115.pdf?id=10.26616/NIOSH PUB85115> (download).

potentially hazardous contents. See the *Occupational Safety and Health Guidance Manual for Hazardous Waste Site Activities* for information on health and safety at hazardous waste sites.

7.1.2 Correct sampling procedures must be applied to conditions as they are encountered. It is impossible to specify rigid rules describing the precise manner of sample collection because of unknowns associated with each liquid sampling situation. It is essential that the samples be collected by a trained and experienced sampler because of the various conditions under which drummed liquids must be sampled.

7.1.3 To be able to make probability or confidence statements concerning the properties of a sampled lot, the sampling procedure must allow for some element of randomness in selection because of possible variations in the material. The sampler should always be on the alert for possible biases arising from the use of a particular sampling device or from unexpected segregation within the material.

7.1.4 The sampling equipment, sample preparation equipment, sample containers, etc. must be clean, dry, and inert to the material being sampled. All equipment, including sample containers, must be inspected before use to ensure that they are clear of obvious dirt and contamination and are in good working condition. Visible contamination must be removed, and the equipment must be decontaminated with the appropriate rinse materials. Decontaminated sampling equipment should be protected from contamination. This may include, but not be limited to, storage in aluminum foil, plastic bags, polytetrafluoroethylene (PTFE) film, or other means of protection that will not impact the sample quality or intended analysis.

7.2 Basic Pre-Sampling Practices:

7.2.1 Review all paperwork.

7.2.2 Select the sampling equipment and sample containers appropriate for the material in the drum, as detailed in the work plan.

7.2.3 Enter the work zone.

7.2.4 Inspect all drums to be sampled visually. Note any abnormal conditions (for example, rust marks, stains, bulges, or other signs of pressurization or leaks) that may require special handling. The work plan should clearly define the limiting conditions under which special handling procedures shall be initiated. See *Drum Handling Practices at Hazardous Waste Sites* for information on opening ~~over-pressurized~~ over-pressurized drums and the use of remotely operated drum opening equipment.

7.2.5 Stage the drums to be sampled in a designated work area if they cannot be sampled in their current location. See *Drum Handling Practices at Hazardous Waste Sites* for further information on staging drums.

7.2.5.1 Move the drums to upright stable ~~positions if necessary.~~ positions, if necessary and safe. Sufficient space shall be left between drums to prevent movement hazards.

7.2.5.2 Allow adequate time for the drum contents to stabilize if movement of a drum is required. The settling time is dependent on the type of material expected.

7.2.5.3 Number or ~~identify uniquely~~ identify all drums to be sampled.

7.2.6 Perform a detailed inspection of individual drums.

7.2.6.1 Record all relevant information from drum labels, markings, data sheets, and so forth, in the field log book or on forms specified in the work plan.

7.2.6.2 Verify that there are no discrepancies with existing paperwork.

7.2.6.3 Any discovered inconsistency from the paperwork (such as evidence of crystals on the drum exterior) should be noted in the field log book.

7.2.7 Slowly remove the bung or loosen the ring that secures the lid, allowing any pressure or vacuum to equalize.

7.2.7.1 *Precautionary Notes:*

(1) If the drum or pail appears to be under positive or negative pressure (that is, a slight bulge or dimple in the lid), control the release of pressure until it has equalized. For example, if the drum or pail is equipped with bungs, loosen the smaller bung first since doing so will make it easier to control the release of pressure.

(2) Pails equipped with snap-on lids may be difficult to open. Care must be exercised when opening to minimize the potential of splashing of the contents.

(3) If the top of the drum is dished inward (dimpled), it may “pop” when equalizing pressure, spraying the sampler with any material that is sitting on top of the drum.

(4) If there is evidence of a chemical reaction or sudden pressure buildup, the sampler should leave the area immediately and evaluate whether remote drum opening equipment should be used.

(5) For flammable or explosive materials, the drum and sampling equipment should be grounded if the generation of static electricity while opening or sampling the drum is a possibility. The drum and sampling equipment should be grounded to a ground stake or to an existing ground (building ground, grounded water pipes, etc.). New glass, plastic ~~thiefs, thieves,~~ or composite liquid waste samplers (COLIWASAs) may have some residual static electrical charge due to the materials in which they are packed and shipped. The work plan should specify whether grounding is required. See the *Accident Prevention Manual for Industrial Operations* for information on grounding and bonding.

7.2.7.2 Drums should be opened, sampled, and closed individually to minimize the risk of volatilization and exposure.

7.2.7.3 *Drums (or Pails) with Bungs*—When using a manual bung wrench, cover it with a wipe or cloth to control potential liquid spray. Use non-sparking tools.

7.2.7.4 *Drums with Removable Lids*—Loosen the ring slowly with a manual wrench or air impact wrench. Use non-sparking tools.

7.2.7.5 *Pails with Removable Lids (Side-Lever Lock Ring)*—Release the lever slowly.

7.2.7.6 *Pails with Removable Lids (Snap-On)*—Pry the lid loose slowly with a pail lid opener.

7.2.8 Manual or remote puncturing or deheading will be required if the drum has a stuck bung or the lid cannot be removed. See *Drum Handling Practices at Hazardous Waste Sites* for further information on manual or remote drum opening.

7.2.9 If required, insert a measuring rod (graduated in litres or gallons) into the drum to measure the liquid volume and determine the presence of solids at the bottom and estimate their percentage. (If minimal disturbance of the contents is required, the measuring rod can be inserted in the vent bung hole when working with a ~~bung-top-drum~~ bung-top drum.) The rod can be graduated in litres or gallons for a specific size drum, or it can be graduated in linear units (inches, centimetres, and so forth), with the liquid depth converted to volume using an appropriate volume conversion. The measuring rod should be nonreactive to the waste being contacted.

NOTE 1—Before inserting the measuring rod into the drum, touch the rim gently with the rod (bonding) opposite from the bung to equalize any static charge that the drum may exhibit. The work plan should specify whether bonding is required.

7.2.9.1 For many liquids, the sampling equipment can serve as a substitute measuring device. This can be accomplished by measuring the length of the liquid column as it is being held over the drum and applying an appropriate volume conversion (for example, 1 in. (2.54 cm) equals 1.7 gal (6.43 L) in a 55-gal (208-L) drum).

NOTE 2—The sampling equipment or measuring rod should be at or near the temperature of the drummed liquid to minimize any reaction caused by temperature differences.

7.3 *Sampling Equipment, Selection*—**Table 1** summarizes selection criteria for equipment by the material to be sampled.

7.4 *Sampling Equipment, Materials of Construction*—Each of the sampling devices listed should be constructed from materials that are inert to any materials that may be encountered at a specific site. These devices are usually made of glass, stainless steel, aluminum, brass, or plastic. Devices with permanent coatings or liners of an inert nonreactive material, such as PTFE, may be ~~substituted,~~ substituted if approved by the work plan.

7.5 *Generic Equipment List:*

7.5.1 A list of equipment generally required for sampling liquids follows:

TABLE 1 Selection Criteria for Equipment

Equipment	ASTM Standard	One Liquid Layer	Two or More Liquid Layers	Liquid and Solid (Sludge) Layers
Drum thief		X ^A	X	X
COLIWASA	D5495	X	X	N ^B
Syringe-type sampler		N	N	X
Coring-type sludge sampler		– ^C	–	X
Plunger-Type Sampler		X	X	N

^A X = equipment may usually be used in or with this type of waste.

^B N = not the equipment of choice, but it may be used.

^C – = equipment is probably unsuitable.

7.5.1.1 Sample containers, lids, and liners;

7.5.1.2 Sample labels;

7.5.1.3 COLIWASAs, drum thieves, thieves, sludge samplers, or equivalent devices;

7.5.1.4 Measuring rods;

7.5.1.5 ~~Chain-of-custody~~ Chain-of-custody forms;

7.5.1.6 Field log books;

7.5.1.7 Sample cooler;

7.5.1.8 Wipes or cloths, or both;

7.5.1.9 Ice or gel ice;

7.5.1.10 Grounding cables with alligator clips and emery cloth; and

7.5.1.11 Portable monitoring equipment (combustible gas indicator, organic vapor detectors, radiation survey meter, etc.).

7.5.2 Equipment needed to open drums should be non-sparking (brass or beryllium copper) and include, but not be limited to, the following:

7.5.2.1 Bung wrenches (one straight and one bent),

7.5.2.2 Flathead screwdriver,

7.5.2.3 Breaker bar (½ in. (13 mm)),

7.5.2.4 Ratchet (½ in. (13 mm)),

7.5.2.5 Speed handle (½ in. (13 mm)),

7.5.2.6 Adjustable wrenches (10 and 12 in. (25 and 30 cm)),

7.5.2.7 Air impact wrench and sockets, and

7.5.2.8 Pail lid opener.

8. Sample Collection

8.1 Basic Sampling Practice:

- 8.1.1 Bond the sampling equipment to the drum, if specified in the work plan.
- 8.1.2 Collect a sample from the drum. Whenever possible, do not sample where the measuring rod has been inserted; however, bung-type drums might not permit avoidance of the disturbed region.
- 8.1.3 Note the physical characteristics, including any discrepancies (such as solidified contents or crystalline material).
- 8.1.4 Place the collected material in a sample container.
- 8.1.5 Close the sample container.
- 8.1.6 Wipe the outside of the sample container. Dispose of the wipe cloth properly.
- 8.1.7 Record in the field log book all of the relevant conditions and physical characteristics associated with the sample.
- 8.1.8 Fill out all of the required paperwork for each sample, as required by the work plan.
- 8.1.9 Complete and attach a label to the side of the sample container before or after sampling, as directed by the work plan. The sample label should include the following:
 - (1) Sample ID number,
 - (2) Name of sampler,
 - (3) Sampler's initials or signature,
 - (4) Date and time of sampling, and
 - (5) Sample location.
 The sample label can also include the following:
 - (1) Sampling information (for example, grab or composite),
 - (2) Preservative or preservation required,
 - (3) Special instructions, and
 - (4) Analysis request.

8.2 *Sampling with a Drum Thief:*

8.2.1 *General Description*—A tube of small diameter, which yields a vertical representation of the contents of a drum when lowered and sealed (see Fig. 1).

NOTE 3—When sampling liquids of high specific gravity, it may be difficult to retain the entire sample in the drum thief. A smaller-diameter drum thief may overcome this problem. The use of a COLIWASA or similar device may be necessary if the problem persists.

8.2.2 *Operation and Use*—Slowly insert the tube vertically until it reaches either the bottom of the drum or the liquid layer to be sampled. The sampling device should be lowered at a rate that permits the liquid level inside and outside the tube to be approximately the same.

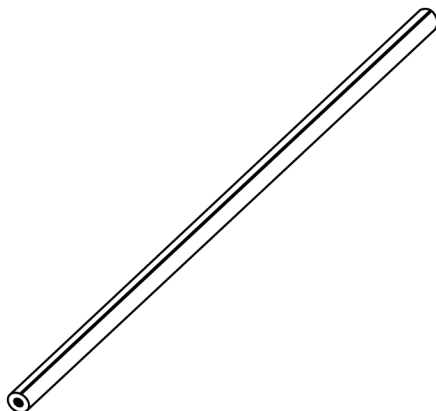


FIG. 1 Drum Thief

NOTE 4—Multiple sample increments are usually necessary to provide enough sample volume for analysis and quality control (QC). Drum contents will become increasingly disturbed with each successive insertion of the drum thief.

8.2.2.1 Cover the top of the tube with the thumb or a rubber stopper to form a seal. Use gloves or a stopper, as described in the work plan.

8.2.2.2 Withdraw the tube carefully.

8.2.2.3 Use a clean cloth or paper towel to wipe the outside of the tube as it is being extracted from the liquid, to prevent unnecessary dripping.

8.2.2.4 Note the proportions of any layers or solids.

8.2.2.5 Place the bottom end of the tube into the sample container, and release the contents slowly.

8.3 Sampling with a COLIWASA:

8.3.1 *General Description*—A glass, plastic, or metal tube with an end closure that can be opened while the tube is immersed in the waste to be sampled (see Practice D5495). The COLIWASA will yield a vertical representation of a drum’s contents when immersed in the open position into a drum (see Fig. 2).

NOTE 5—It is critical to collect the complete depth of material in the drum and place the entirety into the sample container for the contents to be representative of the whole sampled drum. Multiple sample increments are usually necessary to provide enough sample volume for analysis and QC. Drum contents will become increasingly disturbed with each successive insertion of the COLIWASA.

8.4 Sampling with a Syringe-Type Sampler:

8.4.1 *General Description*—A tube with a manually operated piston that can be used as a syringe for high-viscosity liquids or as a coring device for sludge (see Fig. 3).

8.4.2 *Operation and Use*—(1) For high-viscosity liquids, the tube is lowered to the sampling point and the piston is pulled out to collect the sample. (2) For sludge, the tube is lowered to the surface of the sludge. The sampler body is pushed into the sludge while allowing the piston to move up within the sampler body.

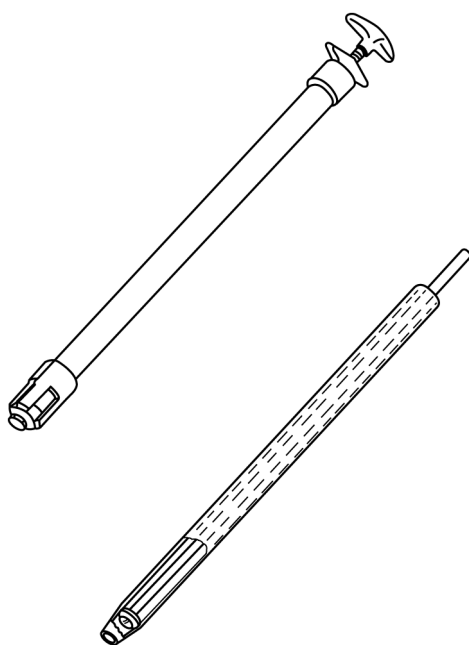


FIG. 2 COLIWASAs (Typical)