



Designation: ~~D7326~~—17 D7326 – 21

## Standard Practice for Handling, Transportation, and Storage of HFC Blend B (CH<sub>2</sub>FCF<sub>3</sub>, CHF<sub>2</sub>CF<sub>3</sub>, and CO<sub>2</sub>)<sup>1</sup>

This standard is issued under the fixed designation D7326; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon (ε) indicates an editorial change since the last revision or reappraisal.

### 1. Scope

1.1 This practice covers guidance and direction to suppliers, reclaimers, purchasers, and users in the handling, transportation, and storage of HFC Blend B.

1.2 The values stated in inch-pound units are to be regarded as standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered standard.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

### 2. Referenced Documents

2.1 *ASTM Standard:*<sup>2</sup>

~~D7327~~ Specification for HFC Blend B (CH<sub>2</sub>FCF<sub>3</sub>, CHF<sub>2</sub>CF<sub>3</sub>, and CO<sub>2</sub>)

2.2 *CGA Standards:*<sup>3</sup>

C-1 Methods for Pressure Testing Compressed Gas Cylinders

C-6 Standard Standards for Visual Inspection of Steel Compressed Gas Cylinders

C-7 Guide to Classification and Labeling of Compressed Gases

P-1 Standard for Safe Handling of Compressed Gases in Containers

~~SB-1~~ Safety Bulletin: Hazards of Refilling or Reusing Compressed Refrigerant (Halogenated Hydrocarbon) Gas Cylinders

~~SB-18~~ Safety Bulletin: Use of Refrigerant (Halogenated Hydrocarbons) Recovery Cylinders

2.3 *U.S. Government Standards:*<sup>4</sup>

~~49 CFR Title 49, Part 172, U.S. Department of Transportation (DOT), Part 172~~ Hazardous Materials Table, Special Provisions, Hazardous Materials Communications, Emergency Response Information, and Training Requirements Training Requirements, and Security Plans

<sup>1</sup> This practice is under the jurisdiction of ASTM Committee D26 on Halogenated Organic Solvents and Fire Extinguishing Agents and is the direct responsibility of Subcommittee D26.09 on Fire Extinguishing Agents.

Current edition approved Feb. 1, 2017 June 1, 2021. Published February 2017 June 2021. Originally approved in 2006. Last previous edition approved in 2012 2017 as D7326-12-17. DOI: 10.1520/D7326-17.10.1520/D7326-21.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For Annual Book of ASTM Standards volume information, refer to the standard's Document Summary page on the ASTM website.

<sup>3</sup> Available from Compressed Gas Association (CGA), 14501 George Carter Way, Suite 103, Chantilly, VA 20151-8484 Westpark Dr., Suite 220, McLean, VA 22102, http://www.cganet.com.

<sup>4</sup> Available Code of Federal Regulations (CFR) documents are available from U.S. Government Publishing Office (GPO), 732 N. Capitol Street, NW, Washington, DC 20401-0001, 20401, http://www.gpo.gov.

~~49 CFR Title 49, Part 172.101, U.S. DOT, Part 172.101 Tables Purpose and Use of Hazardous Materials and Special Provisions Table~~

~~49 CFR Title 49, Part 173, U.S. DOT, Part 173 Shippers-General Shippers—General Requirements for Shipping Shipments and Packagings~~

~~49 CFR Title 49, Part 178, U.S. DOT, Part 178 Specifications for Packagings~~

~~49 CFR Title 49, Part 180, U.S. DOT, Part 180 Continuing Qualification and Maintenance of Packagings~~

### 3. Terminology

3.1 *Definitions of Terms Specific to This Standard:*

3.1.1 ~~containers~~—containers, n—storage vessels for HFC Blend B.

3.1.2 ~~cylinders~~—cylinders, n—containers of HFC Blend B.

3.1.3 ~~HFC Blend B~~—B, n—tertiary blend comprised of HFC-134a (1,1,1,2-tetrafluoroethane), HFC-125 (pentafluoroethane), and carbon dioxide (CO<sub>2</sub>); a compound used to inert, extinguish, or suppress a fire or explosion hazard.

3.1.4 ~~insulated~~—insulated, adj—placed in an isolated situation to protect and prevent the transfer of damage.

### 4. Significance and Use

4.1 This practice provides requirements for the handling, transportation, and storage of HFC Blend B encountered in distribution through both commercial and military channels. It is intended to ensure that HFC Blend B is handled, transported, and stored in such a way that its physical property virtues are not degraded. Transport may be by various means, such as, but not limited to, highway, rail, water, and air.

iteh Standards  
(<https://standards.iteh.ai>)  
Document Preview

[ASTM D7326-21](#)

<https://standards.iteh.ai/catalog/standards/sist/30fa70d2-b3fc-46e3-9dc7-303258141920/astm-d7326-21>

## 5. Practice

5.1 To ensure safe handling, loading, unloading, storing, and transporting of material, personnel shall be trained in the CGA publications and Title-49 CFR regulations as listed in Sections 2.2 and 2.3, respectively.

### 5.2 Handling:

5.2.1 Handling shall be in accordance with CGA ~~P-1, Publication~~ Safe Handling of Compressed Gases in Containers: P-1.

5.2.1.1 Personnel who handle or store, or both, cylinders of HFC Blend B shall be trained properly to recognize and identify the characteristics of the product and the proper methods of safely handling full, partially full, and empty cylinders.

5.2.2 All HFC Blend B transfers between storage containers and recycling processes shall be performed by personnel trained in handling procedures.

5.2.2.1 HFC Blend B recycling and transfer processes shall be in conjunction with the equipment specified by the manufacturer.

5.2.3 To preclude product accumulation and decomposition, HFC Blend B handling shall be performed in ventilated areas that are nonsmoking and free of portable heaters. Provisions shall be made to ensure that service areas limit HFC Blend B concentrations do not exceed 75 000 ppm (~~7.5%~~) (7.5 %) by volume for 1 min and 100 ppm by volume for a ~~time-weighted~~ time-weighted exposure of 8 h.

5.2.4 Cylinders shall not be overfilled. The liquid portion of the HFC Blend B must not completely fill the ~~container's~~ container's internal volume at any temperature up to and including 130 °F (54 °C). The maximum permitted filling density for HFC Blend B shall be 58 lb/ft<sup>3</sup> (930 kg/m<sup>3</sup>). Filling density requirements are specified in ~~Title-49 CFR, CFR Part 173.304 and Title-49 CFR, CFR Part 173.305.~~

5.2.5 Handling of materials should be done in a manner that prevents contamination or ~~comingling~~ comingling of ~~halocarbons-~~ materials other than HFC Blend B.

~~5.2.6 Cylinders shall be free of dirt and contamination that would contribute to or would cause deterioration of product during shipment or storage. Precautions should be taken to prevent the entry of oil, water, or any other foreign matter into containers. Unique coatings or preservatives applied prior to shipment to protect the containers are not considered contamination.~~

<https://standards.iteh.ai/catalog/standards/sist/30fa70d2-b3fc-46e3-9dc7-303258141920/astm-d7326-21>

### 5.3 Transportation:

5.3.1 Transportation shall be as specified in accordance with ~~DOT~~ Department of Transportation (DOT) regulations of ~~Title-49 CFR.~~

5.3.1.1 Shipment of materials between collectors, recyclers, and reclaimers should be within approved DOT guidelines for Class 2, Division 2.2, regulated materials. Any further provisions for special transportation or packaging should be agreed upon between the collectors, recyclers, and reclaimers.

5.3.1.2 The minimum design pressure requirements shall be as indicated in ~~Title-49 CFR, CFR Part 173.304.~~ The pressure inside the container at 70 °F (21 °C) shall not exceed the service pressure for which the container is marked. The pressure inside the container at 130 °F (54 °C) shall not exceed 5/4 times the service pressure for which the container is marked. **Fig. 1** and **Fig. 2** illustrate the effect of temperature on a typical storage cylinder filled with HFC Blend B. Extinguisher filters filled with HFC Blend B may be under additional nitrogen pressurization and isometric diagrams for these conditions are provided in **Figs. 3-6.**

5.3.2 Transportation shall be by suitable vehicles to preclude cylinder damage by excessive mechanical vibration, shock, or deleterious low or high temperatures throughout the entire transport route.

5.3.2.1 If cylinders are expected to be subjected to unacceptable transport conditions, the cylinders should be placed under insulated conditions.

5.3.3 Compressed gas cylinder permanent marking requirements shall be as specified under ~~Title-49 CFR Part 178~~ and must be maintained in legible condition as required by ~~Title-49 CFR Part 173.~~

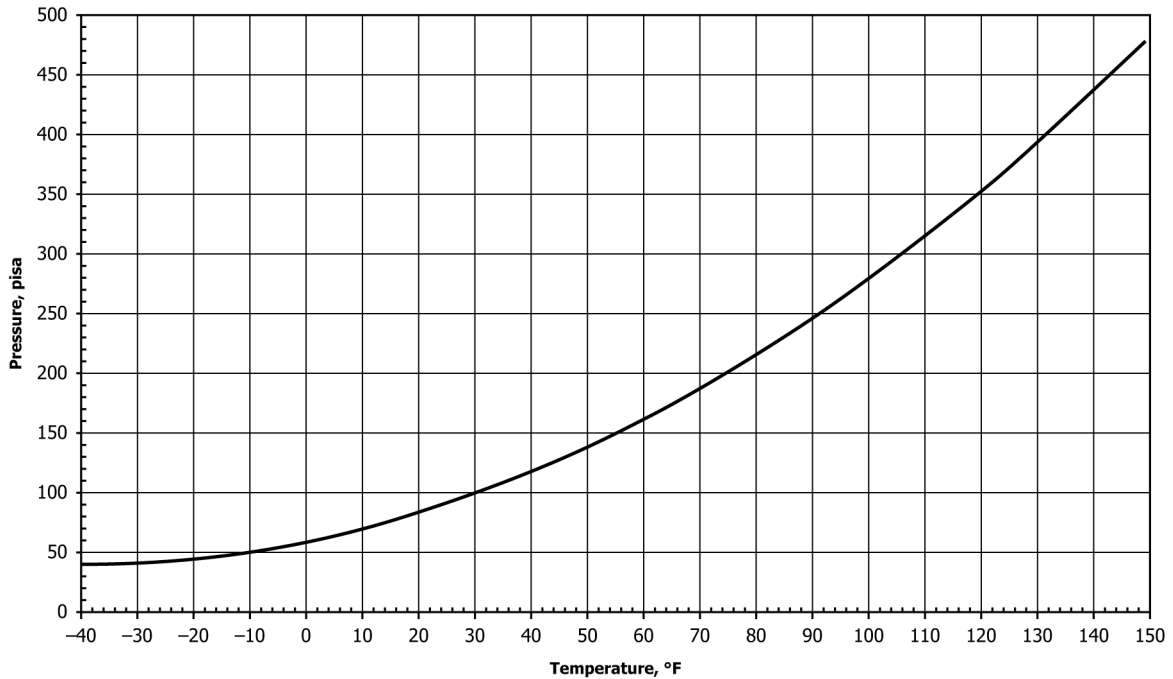


FIG. 1 Saturated Vapor Pressure of HFC Blend B—English Units

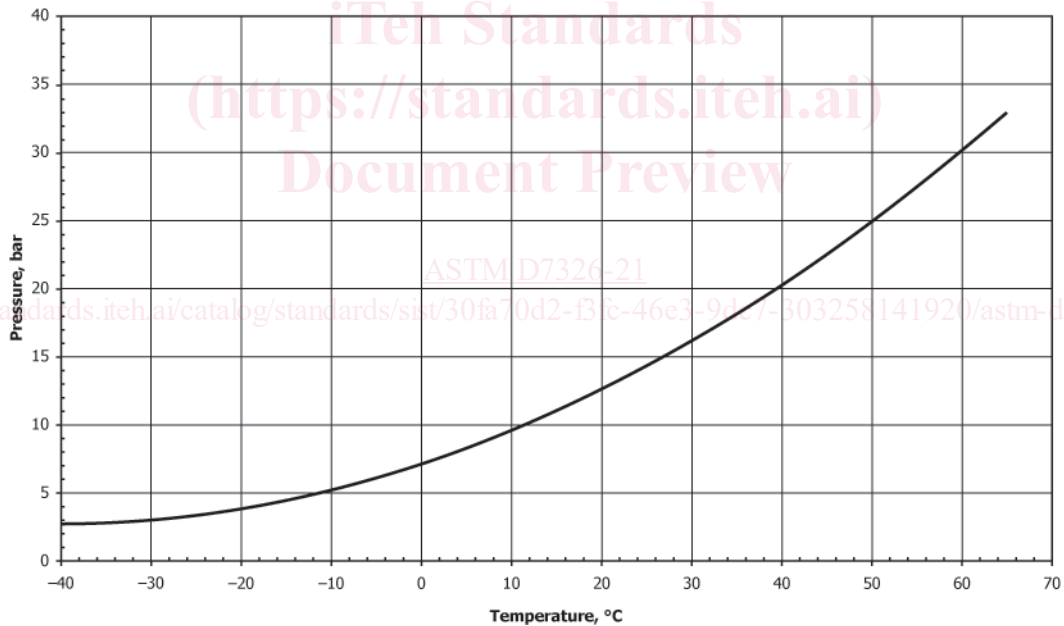


FIG. 2 Saturated Vapor Pressure of HFC Blend B—SI Units

5.4 Storage:

5.4.1 Storage shall be in accordance with CGA P-1, Publication Safe Handling of Compressed Gases in Containers, P-1 in in qualified cylinders in accordance with Title 49 CFR Parts 173 and 178.

5.4.2 Cylinders should be stored in areas that will protect vessels from physical and environmental damage and tampering from unauthorized personnel.

5.4.2.1 Facilities should be of construction and orientation so that safety requirements are fulfilled for the storage of pressurized cylinders.