



SLOVENSKI STANDARD
SIST EN 300 523 V4.11.1:2003
01-december-2003

8 [[[HJb]`W] b]`hY`_ca i b]_UW`g_]`g]ghYa `fZhU&Zk/`E`üHj]]`Yb`YzbUg`Uj``Ub`Y]b
]XYbhZ_UW`Uf] GA`\$`'\$`žfUn`]]WJ(`'%%`%k

Digital cellular telecommunications system (Phase 2) (GSM); Numbering, addressing and identification (GSM 03.03 version 4.11.1)

iteh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **EN 300 523 Version 4.11.1**

SIST EN 300 523 V4.11.1:2003
<https://standards.iteh.ai/catalog/standards/sist/d1179625-2616-47b8-877e-1948034ac9e8/sist-en-300-523-v4-11-1-2003>

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---	--

SIST EN 300 523 V4.11.1:2003 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 523 V4.11.1:2003](https://standards.iteh.ai/catalog/standards/sist/df79625-26f8-47b8-877e-1948034ac9e8/sist-en-300-523-v4-11-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/df79625-26f8-47b8-877e-1948034ac9e8/sist-en-300-523-v4-11-1-2003>

ETSI EN 300 523 V4.11.1 (2000-12)

European Standard (Telecommunications series)

Digital cellular telecommunications system (Phase 2); Numbering, addressing and identification (GSM 03.03 version 4.11.1)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

GSM®

GLOBAL SYSTEM FOR
MOBILE COMMUNICATIONS

[SIST EN 300 523 V4.11.1:2003](https://standards.iteh.ai/catalog/standards/sist/df79625-26f8-47b8-877e-1948034ac9e8/sist-en-300-523-v4-11-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/df79625-26f8-47b8-877e-1948034ac9e8/sist-en-300-523-v4-11-1-2003>



Reference

REN/TSGN-040303PR3

KeywordsDigital cellular telecommunications system,
Global System for Mobile communications (GSM)**ETSI**650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 523 V4.11.1:2003](https://standards.iteh.ai/catalog/standards/sist/df79625-26f8-47b8-877e-1948034ac9e8/sist-en-300-523-v4-11-1-2003)<https://standards.iteh.ai/catalog/standards/sist/df79625-26f8-47b8-877e-1948034ac9e8/sist-en-300-523-v4-11-1-2003>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

Intellectual Property Rights	4
Foreword.....	4
1 Introduction	5
1.1 Scope	5
1.2 References	5
1.3 Definitions and abbreviations	6
1.4 General comments to references.....	6
1.5 Conventions on bitordering	6
2 Identification of mobile subscribers	6
2.1 General	6
2.2 Composition of IMSI.....	7
2.3 Allocation principles	7
2.4 Structure of TMSI	7
2.5 Structure of LMSI	8
3 Numbering plan for mobile stations	8
3.1 General	8
3.2 Numbering plan requirements	8
3.3 Structure of mobile station international PSTN/ISDN number (MSISDN).....	9
3.4 Mobile Station Roaming Number (MSRN) for PSTN/ISDN routing.....	9
3.5 Structure of Mobile Station International Data Number.....	10
3.6 Handover Number	10
4 Identification of location areas and base stations	10
4.1 Composition of the Location Area Identification (LAI).....	10
4.2 Base station identification	10
4.2.1 Cell Identity (CI) and Cell Global Identification (CGI).....	10
4.2.2 Base Station Identity Code (BSIC).....	11
4.3 Regional Subscription Zone Identity (RSZI).....	11
4.4 Location Number.....	12
5 Identification of MSCs and location registers	12
5.1 Identification for routing purpose	12
5.2 Identification of HLR for HLR restoration application	12
6 International mobile station equipment identity and software version number.....	12
6.1 General	12
6.2 Composition of IMEI and IMEISV	13
6.2.1 Composition of IMEI.....	13
6.2.2 Composition of IMEISV	13
6.3 Allocation principles	14
Annex A (informative): Colour Codes	15
A.1 Utilisation of the BSIC	15
A.2 Guidance for planning	15
A.3 Example of PLMN Colour Codes (NCCs) for the European region	16
History	17

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Special Mobile Group (SMG).

The present document defines the plans and principles of numbering, addressing and identification within the European digital cellular telecommunications system (Phase 2). The present document corresponds to GSM Technical Specification (GSM-TS) GSM 03.03 version 4.9.0.

The specification from which the present document has been derived was originally based on CEPT documentation, hence the presentation of the present document may not be entirely in accordance with the ETSI/PNE rules.

Reference is made within the present document to GSM-TSs (NOTE).

NOTE: TC-SMG has produced documents which give the technical specifications for the implementation of the European digital cellular telecommunications system. Historically, these documents have been identified as GSM Technical Specifications (GSM-TSs). These TSs may have subsequently become I-ETSS (Phase 1), or ETSS (Phase 2), whilst others may become ETSI Technical Reports (ETRs). GSM-TSs are, for editorial reasons, still referred to in GSM ETSS.

National transposition dates

Date of adoption of this EN:	01 December 2000
Date of latest announcement of this EN (doa):	31 March 2001
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	30 September 2001
Date of withdrawal of any conflicting National Standard (dow):	30 September 2001

1 Introduction

1.1 Scope

The present document defines:

- a) an identification plan for mobile subscribers in the GSM system;
- b) principles of assigning telephone and ISDN numbers to mobile stations in the country of registration of the mobile station;
- c) principles of assigning mobile station roaming numbers to visiting mobile stations;
- d) an identification plan for location areas and base stations in the GSM system;
- e) an identification plan for MSCs and location registers in the GSM system;
- f) principles of assigning international mobile equipment identities;
- g) principles of assigning zones for regional subscription.

1.2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] GSM 01.04 (ETR 100): "European digital cellular telecommunications system (Phase 2); Abbreviations and acronyms".
- [2] GSM 03.08 (ETS 300 526): "European digital cellular telecommunications system (Phase 2); Organisation of subscriber data".
- [3] GSM 03.20 (ETS 300 534): "European digital cellular telecommunications system (Phase 2); Security related network functions".
- [4] GSM 03.70 (ETS 300 541): "European digital cellular telecommunications system (Phase 2); Routing of calls to/from Public Data Networks (PDN)".
- [5] GSM 04.08 (ETS 300 557): "European digital cellular telecommunications system (Phase 2); Mobile radio interface layer 3 specification".
- [6] GSM 09.03 (ETS 300 600): "European digital cellular telecommunications system (Phase 2); Signalling requirements on interworking between the Integrated Services Digital Network (ISDN) or Public Switched Telephone Network (PSTN) and the Public Land Mobile Network (PLMN)".
- [7] GSM 11.11 (ETS 300 608): "European digital cellular telecommunications system (Phase 2); Specification of the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface".
- [8] CCITT Recommendation E.164: "Numbering plan for the ISDN era".
- [9] CCITT Recommendation E.212: "Identification plan for land mobile stations".

- [10] CCITT Recommendation E.213: "Telephone and ISDN numbering plan for land mobile stations in public land mobile networks (PLMN)".
- [11] CCITT Recommendation X.121: "International numbering plan for public data networks".

1.3 Definitions and abbreviations

Abbreviations used in the present document are listed in GSM 01.04.

1.4 General comments to references

The identification plan for mobile subscribers defined below is that defined in CCITT Recommendation E.212.

The ISDN numbering plan for mobile stations and the allocation of mobile station roaming numbers is that defined in CCITT Recommendation E.213. Only one of the principles for allocating ISDN numbers is proposed for GSM PLMNs. Only the method for allocating mobile station roaming numbers contained in the main text of CCITT Recommendation E.213 is recommended for use in GSM PLMNs. If there is any difference between this Technical Specification and the CCITT Recommendations, the former shall prevail.

For terminology, see also CCITT Recommendations E.164 and X.121.

1.5 Conventions on bitordering

The following conventions hold for the coding of the different identities appearing in this Technical Specification and in other GSM Technical Specifications if not indicated otherwise:

- the different parts of an identity are shown in the figures in order of significance;
- the most significant part of an identity is on the left part of the figure and the least significant on the right.

When an identity appears in other Technical Specifications, the following conventions hold if not indicated otherwise:

- digits are numbered by order of significance, with digit 1 being the most significant;
- bits are numbered by order of significance, with the lowest bit number corresponding to the least significant bit.

2 Identification of mobile subscribers

2.1 General

A unique International Mobile Subscriber Identity (IMSI) shall be allocated to each mobile subscriber in the GSM system.

NOTE: This IMSI is the concept referred to by CCITT as "International Mobile Station Identity".

In order to support the subscriber identity confidentiality service the VLRs may allocate a unique Temporary Mobile Subscriber Identity (TMSI) to visiting mobile subscribers. The VLR must be capable of correlating the IMSI of an MS and the current TMSI for that MS.

In order to speed up the search for subscriber data in the VLR a supplementary Local Mobile Station Identity (LMSI) is defined.

The LMSI may be allocated by the VLR at location updating and is sent to the HLR together with the IMSI. The HLR makes no use of it but includes it together with the IMSI in all messages sent to the VLR concerning that MS.

2.2 Composition of IMSI

IMSI is composed as shown in figure 1.

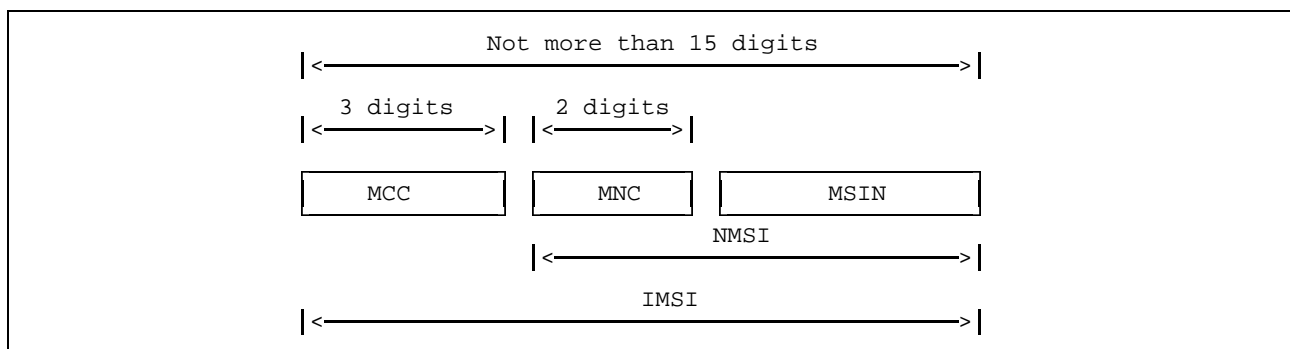


Figure 1: Structure of IMSI

IMSI is composed of three parts:

- i) Mobile Country Code (MCC) consisting of three digits. The MCC identifies uniquely the country of domicile of the mobile subscriber;
- ii) Mobile Network Code (MNC) consisting of two digits for GSM applications. The MNC identifies the home GSM PLMN of the mobile subscriber;
- iii) Mobile Subscriber Identification Number (MSIN) identifying the mobile subscriber within a GSM PLMN.

The National Mobile Subscriber Identity (NMSI) consists of the Mobile Network Code and the Mobile Subscriber Identification Number.

2.3 Allocation principles

IMSI shall consist of numerical characters (0 through 9) only.

The overall number of digits in IMSI shall not exceed 15 digits.

The allocation of Mobile Country Codes (MCCs) is administered by the CCITT and is given in Annex A to CCITT Blue Book Recommendation E.212.

The allocation of National Mobile Subscriber Identity (NMSI) is the responsibility of each administration.

If more than one GSM PLMN exist in a country, a unique Mobile Network Code should be assigned to each of them.

The allocation of IMSIs should be such that not more than the digits MCC + MNC of the IMSI have to be analysed in a foreign GSM PLMN for information transfer.

2.4 Structure of TMSI

Since the TMSI has only local significance (i.e. within the VLR and the area controlled by the VLR), the structure and coding of it can be chosen by agreement between operator and manufacturer in order to meet local needs.

The TMSI consists of 4 octets. It can be coded using a full hexadecimal representation.

In order to avoid double allocation of TMSIs after a restart of a VLR, some part of the TMSI may be related to the time when it was allocated or contain a bit field which is changed when the VLR has recovered from the restart.

The TMSI shall only be allocated in ciphered form. See also Technical Specification GSM 03.20.

The network shall not allocate a TMSI with all 32 bits equal to 1 (this is because the TMSI must be stored in the SIM, and the SIM uses 4 octets with all bits equal to 1 for indicating that no valid TMSI is available).