



Designation: F2933 – 21

Standard Consumer Safety Specification for Crib Mattresses¹

This standard is issued under the fixed designation F2933; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reappraisal.

1. Scope

1.1 This consumer safety specification establishes design requirements, testing requirements and methods, and requirements for labeling for full-size crib mattresses, non-full-size crib mattresses, and after-market mattresses for play yards and non-full size cribs.

1.2 No crib mattress produced after the approval date of this consumer safety specification shall, either by label or other means, indicate compliance with this specification unless it conforms to all requirements contained herein.

1.3 *Units*—The values stated in inch-pound units are to be regarded as the standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered standard.

1.4 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.5 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards*:²

- D3359 Test Methods for Rating Adhesion by Tape Test
- F406 Consumer Safety Specification for Non-Full-Size Baby Cribs/Play Yards
- F1169 Consumer Safety Specification for Full-Size Baby Cribs

¹ This consumer safety specification is under the jurisdiction of ASTM Committee F15 on Consumer Products and is the direct responsibility of Subcommittee F15.66 on Crib Mattresses.

Current edition approved June 15, 2021. Published July 2021. Originally approved in 2013. Last previous edition approved in 2019 as F2933 – 19. DOI: 10.1520/F2933-21.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

F2194 Consumer Safety Specification for Bassinets and Cradles

2.2 *Federal Standards*:³

- 16 CFR 1303 Ban of Lead-Containing Paint and Certain Consumer Products Bearing Lead-Containing Paint
- 16 CFR 1500.48 Technical Requirements for Determining a Sharp Point in Toys and Other Articles for Use by Children Under Eight Years of Age
- 16 CFR 1500.49 Technical Requirements for Determining a Sharp Metal or Glass Edge in Toys or Other Articles Intended for Use by Children Under Eight Years of Age
- 16 CFR 1501 Method for Identifying Toys and Other Articles Intended for Use by Children Under Three Years of Age Which Present Choking, Aspiration or Ingestion Hazards Because of Small Parts
- 16 CFR 1219 Requirements for Full-Size Baby Cribs
- 16 CFR 1220 Requirements for Non-Full-Size Baby Cribs
- 16 CFR 1632 Standard for the Flammability of Mattresses and Mattress Pads
- 16 CFR 1633 Standard for the Flammability (Open Flame) of Mattress Sets
- Consumer Product Safety Improvement Act of 2008 (CPSIA)

3. Terminology

3.1 *Definitions*:

3.1.1 *after-market mattress for play yard or non-full-size crib, n*—a mattress sold or distributed for a play yard or non-full-sized crib.

3.1.1.1 *Discussion*—This does not include a replacement mattress provided or sold by an original equipment manufacturer (OEM) if, and only if, it is equivalent with respect to dimensions, and specifications to the mattress that was provided with the original product.

3.1.2 *conspicuous, adj*—visible, when the mattress is being handled by a consumer.

3.1.3 *core, n*—main support system that may be present in a mattress, such as springs, foam, hair block, or resilient filling.

³ Available from the U.S. Government Printing Office, Superintendent of Documents, 732 N. Capital St., NW, Washington, DC 20402-0001.

3.1.4 *crib, n*—bed that is designed to provide sleeping accommodations for an infant which have specific interior dimensions as determined by it being either a full size or non-full size crib:

3.1.4.1 *full size crib, n*—52 $\frac{3}{8}$ in. \pm $\frac{5}{8}$ in. (1330 mm \pm 16 mm); Width 28 in. \pm $\frac{5}{8}$ in. (711 mm \pm 16 mm) (as defined in 16 CFR 1219 and Consumer Safety Specification F1169).

3.1.4.2 *non-full size crib, n*—interior length dimension either greater than 55 in. (1397 mm) or smaller than 49 $\frac{3}{4}$ in. (1264 mm) or an interior width dimension either greater than 30 $\frac{5}{8}$ in. (778 mm) or smaller than 25 $\frac{3}{8}$ in. (645 mm) or both (as defined in 16 CFR 1220 and ASTM F406).

3.1.5 *mattress, n*—ticking filled with a resilient material used alone or in combination with other products intended or promoted for sleeping on it.

3.1.5.1 *Discussion*—For the purpose of this consumer safety specification, this term includes crib mattresses and non-full-size crib mattresses.

3.1.6 *non-paper label, n*—any label material (such as plastic or metal) that either will not tear without the aid of tools or tears leaving a sharply defined edge.

3.1.7 *paper label, n*—any label material that tears without the aid of tools and leaves a fibrous edge.

3.1.8 *surface, n*—side of a mattress that is intended for sleeping on it and can be tested.

3.1.9 *ticking, n*—outermost layer of fabric or related material that encloses the core and upholstery materials of a mattress.

3.1.9.1 *Discussion*—A mattress ticking may consist of several layers of fabric or related materials quilted together.

3.1.10 *upholstery material, n*—all material, either loose or attached, between the mattress ticking and the core of a mattress, if a core is present.

4. Calibration and Standardization

4.1 All testing shall be conducted on a rigid and level surface unless the test instructions are different.

4.2 The product shall be completely assembled, unless otherwise noted, in accordance with the manufacturer's instructions.

4.3 The product to be tested shall be in a room with an ambient temperature of 73 °F \pm 9 °F (23 °C \pm 5 °C) for at least 8 h before testing. Testing shall then be conducted within this temperature range.

4.4 All testing required by this specification shall be conducted on the same product unless otherwise specified.

5. General Requirements

5.1 Any product under this consumer safety specification shall comply with all other applicable mandatory federal statutes and regulations (for example, CPSIA, 16 CFR 1632, 16 CFR 1633, and so forth).

5.2 There shall be no hazardous points or edges as defined by 16 CFR 1500.48 and 16 CFR 1500.49 before and after testing to this consumer safety specification.

NOTE 1—Mattresses that do not have any exterior components other than ticking (for example, vents, vibrating motors, zippers, and so forth) or any protruding components are considered exempt from these requirements.

5.3 There shall be no small parts as defined by 16 CFR 1501 before testing or liberated as a result of testing to this consumer safety specification.

5.4 Any paint and surface coatings on the product shall comply with 16 CFR 1303.

5.5 *Openings*—Holes or slots that extend entirely through a wall section of any rigid material less than 0.375 in. (9.53 mm) thick and admit a 0.210-in. (5.33-mm) diameter rod shall also admit a 0.375-in. (9.53-mm) diameter rod. Holes or slots that are between 0.210 and 0.375 in. (5.33 and 9.53 mm) and have a wall thickness less than 0.375 in. (9.53 mm), but are limited in depth to 0.375 in. (9.53 mm) maximum by another rigid surface, shall be permissible. The product shall be evaluated in all the manufacturer's recommended use positions.

5.5.1 This requirement applies to vents, zipper tabs, and any other rigid components that may be designed into a mattress.

5.6 Labeling:

5.6.1 Warning labels (whether paper or non-paper) shall be permanent when tested in accordance with 6.1. Non-coated paper warning label shall not be applied on either side of sleeping surface.

NOTE 2—Non-coated paper label may absorb water and can deteriorate.

5.6.2 Warning statements applied directly onto the surface of the mattress by hot stamping, heat transfer, printing, and so forth shall be permanent when tested in accordance with 6.1.4.

5.6.3 Non-paper labels shall not liberate small parts when tested in accordance with 6.1.5.

5.7 Mattress Dimensions:

5.7.1 Full-Size Crib Mattresses:

5.7.1.1 *Mattress Size*—The dimensions of a full-size crib mattress shall measure at least 27 $\frac{1}{4}$ in. (690 mm) wide and 51 $\frac{5}{8}$ in. (1310 mm) long when tested in accordance with 6.2.

5.7.2 Non-Full-Size Crib Mattresses:

5.7.2.1 *Mattress Size*—The dimensions of a mattress supplied with a non-full-size baby crib shall be such that the mattress, when inserted in the center of the crib, in a noncompressed state at any of the adjustable positions of the mattress support, shall not leave a gap of more than $\frac{1}{2}$ in. (12.7 mm) at any point between the perimeter of the mattress and the perimeter of the crib. When the mattress is placed against the perimeter of the crib, the resulting gap shall not exceed 1.0 in. (25.4 mm).

5.7.2.2 Mattress Thickness:

(1) A mattress supplied with a non-full-size crib shall, in a noncompressed state, have a thickness that will provide a minimum effective crib-side height dimension of at least 20 in. (508 mm) as measured from the upper surface of the crib side or end panel. For this measurement, the crib side shall be in its highest adjustable position and the mattress support in its lowest adjustable position.

(2) A mattress supplied with a non-full-size crib shall, in a noncompressed state, have a thickness that will provide a minimum effective crib-side height dimension of at least 3 in.

(76 mm) as measured from the upper surface of the mattress to the upper surface of the crib side or end panel. For this measurement, the crib side shall be in its lowest adjustable position and the mattress support in its highest adjustable position.

5.8 *Mattress Seam Stitching*—All seam stitching that is accessible to the occupant shall be lock-stitching.

NOTE 3—The seam stitching on the inside of product is not considered accessible to the occupant.

5.9 *After-Market Mattress for Play Yard and Non-Full Size Crib*—For the purposes of this section, the term product refers to a play yard or non-full-size crib.

5.9.1 *For Mesh/Fabric Sided Products and Rigid Sided Non-Rectangular Products:*

5.9.1.1 The aftermarket mattress and product it is tested in shall meet the applicable requirements of the following sections of Consumer Safety Specification F406 when tested with each brand and model of product for which it is intended to replace the mattress: *Stability; Cord/Strap Length; Mattress; Mattresses for Rigid-sided Products; Crib Side Height; Height of Sides; Floor Strength; Mattress Vertical Displacement.*

5.9.1.2 If the aftermarket mattress is intended to be used in the bassinet of a play yard with a bassinet attachment, the mattress shall also meet the specifications of the following sections of Consumer Safety Specification F2194 when tested with each brand and model for which it is intended to replace the mattress: *Pad Thickness for Fabric or Mesh Sided Products; Pad dimensions; Side Height; Bassinets with Segmented Mattresses.*

This section applies only to a play yard mattress that is interchangeably used as a play yard mattress and as a bassinet mattress/pad.

5.9.1.3 The aftermarket mattress must be at least the same size as the original equipment mattress or larger and lay flat on the floor of the product, in contact with the play yard mattress support structure or floor.

5.9.1.4 If the original equipment mattress includes a floor support structure, the aftermarket mattress must include a floor support structure that is at least as thick as the original equipment mattress floor support structure.

5.9.1.5 If the original equipment mattress includes storage accommodations for the product instruction manual, the aftermarket mattress shall provide equivalent storage accommodations for the product instruction manual.

6. Test Methods

6.1 *Permanency of Labels and Warnings:*

6.1.1 A paper label (excluding labels attached by a seam) shall be considered permanent if, during an attempt to remove it without the aid of tools or solvents, it cannot be removed, it tears upon removal, or such action damages the surface to which it is attached.

6.1.2 A non-paper label (excluding labels attached by a seam) shall be considered permanent if, during an attempt to remove it without the aid of tools or solvents, it cannot be removed or such action damages the surface to which it is attached.

6.1.3 A warning label attached by a seam shall be considered permanent if it does not detach when subjected to a 15 lbf (67 N) pull force applied in any direction most likely to cause failure using a clamp with a 3/4-in. (19-mm) diameter clamping surface. Apply the force evenly over 5 s and maintain for an additional 10 s.

6.1.4 *Adhesion Test for Warnings Applied Directly onto the Surface of the Product:*

6.1.4.1 Apply the tape test defined in Test Method B, Cross-Cut Tape Test, of Test Methods D3359, eliminating the parallel cuts.

6.1.4.2 Perform this test once in each different location where warnings are applied.

6.1.4.3 The warning statements will be considered permanent if the printing in the area tested is still legible and attached after being subjected to this test.

6.1.5 A non-paper label, during an attempt to remove it without the aid of tools or solvents, shall not be removed nor shall not fit entirely within the small parts cylinder defined in 16 CFR 1501 if it can be removed.

6.2 *Mattress Dimensional Measurements for Full-Size Crib Mattress:*

6.2.1 *Test Equipment—Mattress Measuring Box:*

6.2.1.1 The mattress measuring box is a rectangular box with rigid walls having interior dimensions at least 29 1/2 in. by 54 in. (749 mm by 1372 mm) with walls at least 8 in. (203 mm) high that are perpendicular to the floor. The wall and floor thicknesses should be sufficient to avoid warping or deformation during testing. See Fig. 1 for example.

6.2.1.2 The interior floor of the box should be made of or covered with a material that provides a smooth surface that allows the mattress to slide freely.

6.2.1.3 One short side of the box should have a sliding panel measuring 26 1/8 in. ± 1/2 in. (664 mm ± 12.7 mm) with its end located 1/2 in. ± 1/4 in. (12.7 mm ± 6.3 mm) from the inside surface of Wall D in Fig. 1. This panel will be called Panel A.

6.2.1.4 One long side of the box should have a sliding panel measuring 50 1/2 in. ± 1/2 in. (1283 mm ± 12.7 mm) with its end located 1/2 in. ± 1/4 in. (12.7 mm ± 6.3 mm) from the inside surface of Wall C in Fig. 1. This panel will be called Panel B.

6.2.2 *Test Method:*

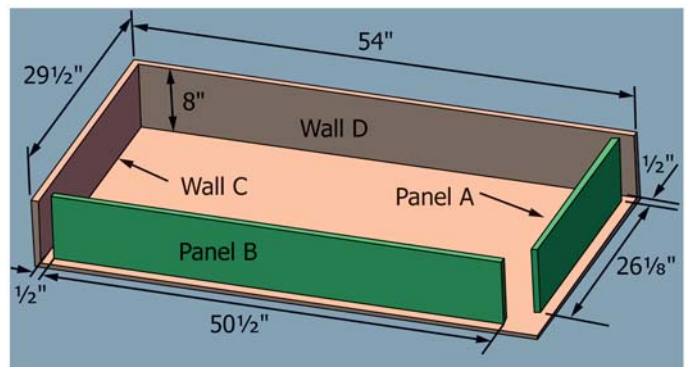


FIG. 1 Crib Mattress Measuring Box (1 in. = 2.54 cm)

6.2.2.1 Place the mattress into the mattress measuring box so it is touching Walls C and D.

6.2.2.2 To position the mattress in the measuring box, gradually apply a 7 lbf (31.1 N) force to Panel A. Release this force. Then gradually apply a 14 lbf (62.3 N) force to Panel B. Release this force.

6.2.2.3 Apply a 7 lbf ± 1 lbf (31.1 N ± 4.4 N) force to Panel A within a period of 5 s. Within 30 s of application of the force to Panel A, and while maintaining this force, apply a 14 lbf ± 1 lbf (62.3 N ± 4.4 N) force to Panel B within a period of 5 s.

6.2.2.4 Apply the forces from 6.2.2.3 for 60 s. With forces still applied, measure the length and width of the interior dimension measured from the horizontal midpoints of Panel A to Wall C (length) and Panel B to Wall D (width). These measurements are to be considered the mattress dimensions.

7. Marking and Labeling

7.1 The warning statements in this consumer safety specification cannot be placed on any other labels required by law (for example, 16 CFR 1633 label or state law labels).

7.2 Warning statements shall be easy to read and understand. The warning statements shall be conspicuous, permanent (as defined in 6.1), and in sans serif type.

7.2.1 The warning label shall include a delineated signal word panel containing the safety alert symbol followed by the signal word “WARNING” on a contrasting background. The letters and safety alert symbol shall not be less than 0.2 in. (5 mm) high. The remaining text shall be in characters whose upper case is at least 0.1 in. (2.5 mm) high.

7.2.2 The warning label shall meet one of the following conditions:

7.2.2.1 The safety alert symbol shall be an orange filled triangle on a contrasting background.

7.2.2.2 The signal word panel containing both the safety alert symbol and signal word shall be orange in color on a contrasting label (for example, orange background on white label).

7.2.2.3 The entire warning label shall be orange with the warning text and symbols in contrasting color (for example, orange label with black text and symbols).

7.3 The following warning statements shall be included exactly as stated below:



Failure to follow these warnings could result in serious injury or death.

To prevent deaths, the U.S. Consumer Product Safety Commission (CPSC), the American Academy of Pediatrics (AAP), and the National Institute of Child Health and Human Development (NICHD) recommend the following:

To reduce the risk of Sudden Infant Death Syndrome (SIDS) and suffocation, pediatricians recommend healthy infants be placed on their backs to sleep, unless otherwise advised by your physician.

- Infants can suffocate on soft bedding. Never place a pillow or comforter under sleeping infant for additional padding or as a mattress substitute.

- Do not cover the heads of babies with a blanket or over bundle them in clothing and blankets. Overheating can lead to SIDS.

7.3.1 For full-size crib mattresses, the following warning statement shall be included with the warnings from 7.3 exactly as stated below:

- Do not use this mattress in a crib having interior dimensions that exceed 28⁵/₈ in. by 53 in. (73 cm by 135 cm) as measured from the innermost surfaces of the crib.

- Only use sheets and mattress pads designed specifically for crib mattresses.

7.3.2 For non-full-size crib mattresses, the following warning statement shall be included with the warnings from 7.3 exactly as stated below:

- Only use sheets and mattress pads designed specifically for this mattress size.

7.3.3 Additional manufacturer warnings may be included between the warnings specified in 7.3 and 7.4 if desired.

7.4 The following warning statement shall be included exactly as stated below:

DO NOT remove these important safety instructions.

7.4.1 This warning shall be located at the bottom of the label that contains the warnings from 7.3.

7.5 *Additional Marking and Warnings for After-Market Mattress for Mesh/Fabric Sided Products and Rigid Sided Non-Rectangular Products*—The mattress shall have:

7.5.1 All warnings the original manufacturer may have added which are beyond the F2933 standard.

7.5.2 Assembly/attachment instructions that were provided on the original mattress.

7.5.3 The following labeling and warnings shall be on the mattress and visible on the retail packaging.

7.5.3.1 The mattress shall specifically identify the brand(s) and Model(s) numbers of products in which it is intended to be used.

7.5.3.2 Warnings according to 7.7 of this standard.

7.6 *Additional Marking and Warnings for After-Market Mattress for Rigid Sided Rectangular Product*:

7.6.1 The following labeling and warnings shall be on the mattress and visible on the retail packaging.

7.6.1.1 The following statement shall appear exactly as stated below.

Check for proper fit of the mattress. This mattress measures _____ long, _____ wide, and _____ thick when measured from seam to seam. (The blank is to be filled in.)

7.6.1.2 The warnings according to 7.7 of this standard.

7.7 The following warnings shall appear exactly as stated below.

Suffocation Hazard:

△WARNING

Babies have suffocated:

- In gaps between wrong-size mattress and side walls of product.

- Between the side walls and extra padding, such as stacked mattresses.

ALWAYS check mattress fit by pushing mattress tight to one corner. Look for any gaps between the mattress and the side