
Blank Detail Specification: Electromechanical all-or-nothing TELECOM relays of assessed quality

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 116501:2002](https://standards.iteh.ai/catalog/standards/sist/f4ab32a9-c785-4107-a79e-84b55f2eab48/sist-en-116501-2002)

<https://standards.iteh.ai/catalog/standards/sist/f4ab32a9-c785-4107-a79e-84b55f2eab48/sist-en-116501-2002>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 116501:2002](https://standards.iteh.ai/catalog/standards/sist/f4ab32a9-c785-4107-a79e-84b55f2eab48/sist-en-116501-2002)

<https://standards.iteh.ai/catalog/standards/sist/f4ab32a9-c785-4107-a79e-84b55f2eab48/sist-en-116501-2002>

UDC

Descriptors: Quality, electronic components, TELECOM relays

English version

Blank detail specification:

**Electromechanical all-or-nothing
TELECOM relays of assessed quality**

Spécification particulière cadre:

Vordruck für Bauartspezifikation:

Relais électromécaniques de
tout-ou-rien TELECOM soumis au
régime d'assurance de la qualité

Gütebestätigte
elektromechanische
TELEKOM-Relais

(standards.iteh.ai)

This European Standard was approved by the CENELEC Electronic Components Committee (CECC) on 13 February 1992. CENELEC members are bound to comply with CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the General Secretariat of the CECC or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CECC General Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, and United Kingdom. The membership of the CECC is identical, with the exception of the national electrotechnical committees of Greece, Iceland and Luxembourg.

CECC

CENELEC Electronic Components Committee
Comité des Composants Electroniques du CENELEC
CENELEC- Komitee für Bauelemente der Elektronik
General Secretariat: Gartenstr. 179, W- 6000 Frankfurt/Main 70

PREFACE

The CENELEC Electronic Components Committee (CECC) is composed of those member countries of the European Committee for Electrotechnical Standardization (CENELEC) who wish to take part in a harmonized System for electronic components of assessed quality.

The object of the System is to facilitate international trade by the harmonization of the specifications and quality assessment procedures for electronic components, and by the grant of an internationally recognized Mark, or Certificate, of Conformity. The components produced under the System are thereby acceptable in all member countries without further testing.

This specification has been formally approved by the CECC, and has been prepared for those countries taking part in the System who wish to issue national harmonized specifications for ELECTROMECHANICAL ALL-OR-NOTHING RELAYS. It should be read in conjunction with the current regulations for the CECC System.

FOREWORD

This specification was prepared by CECC WG 16 "Relays".


It is based, wherever possible, on the Publications of the International Electrotechnical Commission (IEC).

The CECC voting procedure has been concluded on draft prEN 116 501 circulated as document CECC(Secretariat) 2778/4.91 and has resulted in a positive vote.

The voting report [document CECC(Secretariat)3010/1.92] has been submitted for formal approval and has been accepted. The reference document was approved by CECC as EN 116 501 : 1992 on 13 February 1992.

The following dates were fixed:

- | | | |
|--|-------|------------|
| - latest date of announcement of the EN at national level | (doa) | 1993-02-05 |
| - latest date of publication of an identical national standard | (dop) | 1993-08-05 |
| - latest date of withdrawal of conflicting national standards | (dow) | 1993-08-05 |

(1)	CECC 16 501 - xxx Issue: 1991 Page 1 of  (2)
Electronic components of assessed quality in accordance with: EN 116 000 - 1 : 1992 (CECC 16 000 / 1, 1990) EN 116 500 : 1992	(4)
Detail specification for electromechanical all-or-nothing TELECOM relays of assessed quality Type: (5) Construction: (6)	
Outline drawing resp. wiring diagram (7) Dimensions in mm	Application: (8)
Coil data (9) Rated voltages: V d. c. Rated power: mW	
Contact data (10) Number(s) and type(s) of contacts Rated contact voltage: current: power:	
Component climatic category: (11) Temperature range - operating ambient temperature: °C to °C - storage temperature: °C to °C	
Information about manufacturers who have components qualified to this detail specification is available in the current CECC 00 200.	

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 116501:2002](https://standards.iteh.ai/catalog/standards/sist/f4ab32a9-c785-4107-a79e-84b55f2eab48/sist-en-116501-2002)
<https://standards.iteh.ai/catalog/standards/sist/f4ab32a9-c785-4107-a79e-84b55f2eab48/sist-en-116501-2002>

Key for page 3:

The numbers between brackets on page 1 correspond to the following indications which should be given:

Identification of the detail specification

- (1) The name of the National Standards Organisation under whose authority the detail specification is published and, if applicable, the organisation from whom the detail specification is available
- (2) The CECC symbol and the number allotted to the completed detail specification by the CECC General Secretariat
- (3) The number and the year of availability of the EN generic specification and / or sectional specification; also national reference if different
- (4) If different from the CECC number, the national number of the detail specification, date of issue and any further information required by the national system, together with any amendment numbers.

Identification of the relay

- (5) Type: Monostable or bistable, non-polarized or polarized, number and types of contacts
- (6) Construction: Sizes, e. g. dual-in-line, base and overall height, type of relay, based upon environmental protection (RT I...RT IV), mounting variants and other typical construction details
- (7) An outline drawing with main dimensions which are of importance for interchangeability, and / or reference to the appropriate national or international document for outlines. Alternatively, this drawing may be given in an annex to the detail specification, but (7) should always contain an illustration of the general outer appearance of the component.
- (8) Typical field of applications
- (9) Available rated coil voltages and rated power [SIST EN 116501:2002](https://standards.iteh.ai/catalog/standards/sist/f4ab32a9-c785-4107-a79e-8b5510101010)
- (10) Available contact arrangements, defined, special contact materials and contact voltage, current and power. The respective code digit for contact materials shall be listed in an annex, if applicable.
- (11) Component climatic category and temperature range.

1 Related documents

- EN 116 000 - 1 : 1992 (CECC 16 000 / 1, 1990) Generic specification for electromechanical all-or-nothing relays, Part I: General
- EN 116 500 : 1992 Sectional specification for electromechanical all-or-nothing telecom relays of assessed quality

(National authorized institutions will complete this section making reference to any documents or specifications directly referred to in their national equivalent of this document.)

2 Characteristic values of the relay

2.1 General data


- Thermal resistance: max. K/W
- Contact application: 0, 1 or / and 2
- Relay mass: max. g
- Finish of the terminals: presoldering and the admissible non-presoldered part, e.g. the distance to the relay body, if applicable
- Insulation resistance: megaohm min. at 500 V d. c.
- Dielectric strength: see table 1

<https://standards.iteh.ai/catalog/standards/sist/f4ab32a9-c785-4107-a79e-84b55f2eab48/sist-en-116501-2002>

Table 1 Dielectric test voltages

	Dielectric test V a. c. min.	Impulse voltage test 10 μ s / 700 μ s V min.
Opened contact circuits		
Between separate contact circuits		
Coil to contact circuits		
All parts to case		

2.2 Construction of CECC type designation (ordering information):

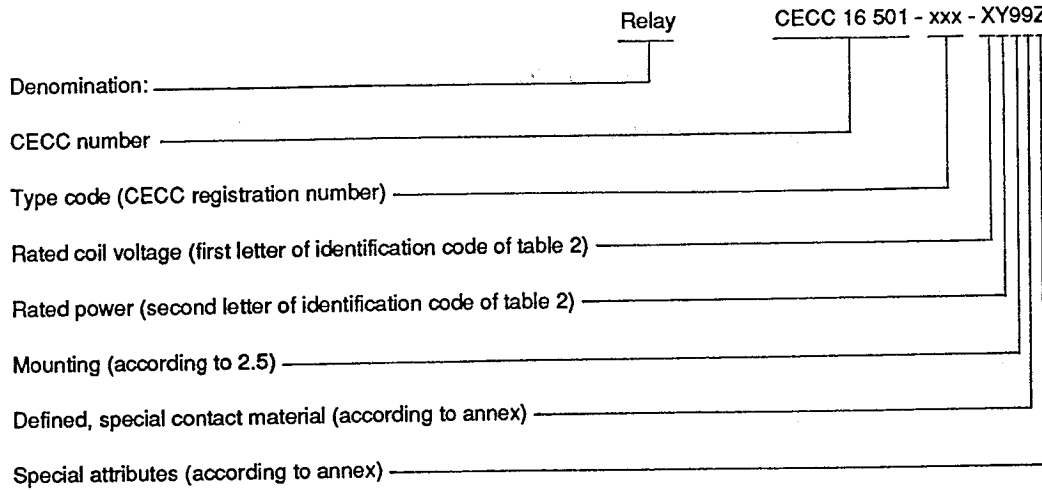

Note - The coding of the monostable or bistable relay type shall be combined with the rated power of the coil, if applicable. The reference to the number and types of contacts shall be given on page 3 of the specification.

Use code 0 as last digit if no special attributes apply. If one of the attributes in the example for a detail specification shall not be considered, the corresponding code number or letter shall be deleted; there shall be no special marks or open space for non applicable attributes.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 116501:2002](https://standards.iteh.ai/catalog/standards/sist/f4ab32a9-c785-4107-a79e-84b55f2eab48/sist-en-116501-2002)
<https://standards.iteh.ai/catalog/standards/sist/f4ab32a9-c785-4107-a79e-84b55f2eab48/sist-en-116501-2002>

2.3 Coil data

Table 2

Identification code	Rated voltage V	Coil resistance at (23 ± 2) °C ohm ± %	Must operate voltage V at coil temperature		Maximum coil voltage V at °C	Must not release voltage V	Must release voltage V	Rated power mW
			23 °C	°C				

iTeh STANDARD PREVIEW
(standards.iteh.ai)

2.4 Contact data

2.4.1 Electrical endurance and switching frequency

SIST EN 116501:2002

Contact failure: Contact-circuit resistance of a closed contact higher than the value stated in 2.4.2, or resistance of an open contact circuit lower than 100 kohm, both more than once per 10⁶ cycles or for the minimum switching cycles stated (if lower than 10⁶), calculated for each single contact.

Example: At a given endurance of 10⁷ operations the total number of faults, as described above, shall not exceed 10.

Table 3 Loads, contact-circuit resistance limits, switching cycles and frequencies for electrical endurance and overload tests

Loads	Contact-circuit resistance ohm max.	Number of switching cycles min.	Switching frequencies cycles per s max.
contact application 0			
resistive - max. contact voltage / max. power			
resistive - max. contact current / max. power			
d.c. open-ended cable			
overload			

2.4.2 Static contact-circuit resistance

- milliohm max. initial condition at rated voltage
- milliohm max. difference of contact-circuit resistance between different contact circuits in the same relay at rated voltage (initial condition)
- ohm max. during / after electrical endurance and environmental tests at rated voltage

2.4.3 Mechanical endurance

- min. switching cycles

2.4.4 Timing

- Operate time: max. ms
- Release time: max. ms
- Bounce time when the contacts are closing: max. ms
- Bounce time when the contacts are opening: max. ms
- Transfer time on operation and release (last break contact opens before first make contact closes respectively last make contact opens before first break contact closes) or bridging time on operation and release (last make contact closes before first break contact opens respectively last break contact closes before first make contact opens): min. ms


 (standards.iteh.ai)
 SIST EN 116501-2002
<https://standards.iteh.ai/catalog/standards/sist/4ab32a9-c785-4107-a79e-84b55f2eab48/sist-en-116501-2002>

2.5 Mounting

The mounting variants and the respective code numbers shall be specified.

The code number 1 shall be used for relays designed to be directly soldered onto printed circuit boards using conventional assembling techniques, the code number 2 for relays designed for surface mounting technology.

2.6 Environmental data

The relays shall withstand at least the following environmental stresses:

- shock, functional: m / s^2 (g) half sine acceleration, ms duration
- shock, survival: m / s^2 (g) half sine acceleration, ms duration
- vibration (sinusoidal): amplitude mm or m / s^2 , to Hz
- mechanical robustness of terminals:

thrust	N
bending	bends
- soldering
 - solderability at 235 °C after ageing at 155 °C for 16 h (if required): 2 s
 - resistance to soldering heat, terminal immersion time for 260 °C: 10 s

(2.6 continued)

- enclosure (if relevant)
 - leak rate max. 100 Pa · cm³ / s
- resistance to cleaning solvents when rubbing with wrapping tissue paper
 - mixture of 1, 1, 2- trichlorotrifluoroethene and 2-propanol 70 : 30 by weight, at boiling temperature 5 min
 - demineralized or distilled water at 55 °C 5 min
- fire hazard, needle flame s

3 Qualification approval procedures

- as stated in CECC 00 114 Part II, § 1.4 (1) fixed sample
- sampling and test schedule are specified in table 5
- the tests specified and their order are mandatory

iTeh STANDARD PREVIEW
(standards.iteh.ai)

4 Quality conformance inspection

Quality conformance inspection contains the tests stated in table 4

- group A and B: lot-by-lot tests
- group C: periodic tests

Unless otherwise stated in this blank detail specification, all tests of table 4 are mandatory. Where a sub-group contains cumulative tests, the order of the tests is mandatory. Specimens subjected to tests denoted as destructive (D) shall not be released for delivery.

4.1 Formation of inspection lots

According to CECC 00 114 / II, § 3.1; the basis for determination of sample size for the quality conformance inspection is the relay quantity produced during 1 week.

4.2 Intervals between tests

- sub-group A4, B1 and B2: minimum once a week
- sub-group C1 and C2: once in 6 months
- sub-group C4 to C6: at least once in 2 years