
Digitalno omrežje z integriranimi storitvami (ISDN) - Generil'ni funkcijski protokol za podporo dopolnilnih storitev - Protokol digitalne narol'niške signalizacije št. 1 (DSS1) - 4. del: Abstraktni preskušalni niz (ATS) in delna dodatna informacija za preskušanje izvedbe protokola (PIXIT) - Proforma specifikacija za uporabnika

Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 4: Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user

(standards.iteh.ai)

[SIST EN 300 196-4 V1.2.1:2004](https://standards.iteh.ai/catalog/standards/sist/88fcda5-227d-4ffb-9730-3e25804d5318/sist-en-300-196-4-v1-2-1-2004)

<https://standards.iteh.ai/catalog/standards/sist/88fcda5-227d-4ffb-9730-3e25804d5318/sist-en-300-196-4-v1-2-1-2004>

Ta slovenski standard je istoveten z: EN 300 196-4 Version 1.2.1

ICS:

33.080	Digitalno omrežje z integriranimi storitvami (ISDN)	Integrated Services Digital Network (ISDN)
--------	---	--

SIST EN 300 196-4 V1.2.1:2004

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 196-4 V1.2.1:2004

<https://standards.iteh.ai/catalog/standards/sist/88fcda5-227d-4ffb-9730-3e25804d5318/sist-en-300-196-4-v1-2-1-2004>

ETSI EN 300 196-4 V1.2.1 (2001-11)

European Standard (Telecommunications series)

**Integrated Services Digital Network (ISDN);
Generic functional protocol for the
support of supplementary services;
Digital Subscriber Signalling System No. one (DSS1) protocol;
Part 4: Abstract Test Suite (ATS) and partial Protocol
Implementation eXtra Information for Testing (PIXIT)
proforma specification for the user**

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST EN 300 196-4 V1.2.1:2004](https://standards.iteh.ai/catalog/standards/sist/88fcda5-227d-4ffb-9730-3e25804d5318/sist-en-300-196-4-v1-2-1-2004)

<https://standards.iteh.ai/catalog/standards/sist/88fcda5-227d-4ffb-9730-3e25804d5318/sist-en-300-196-4-v1-2-1-2004>



Reference

REN/SPAN-130135-4

KeywordsATS, DSS1, ISDN, PIXIT, supplementary service,
testing, user**ETSI**650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 196-4 V1.2.1:2004<https://standards.iteh.ai/catalog/standards/sist/88fcdaf5-227d-4ffb-9730-3e25804d5318/sist-en-300-196-4-v1-2-1-2004>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword.....	5
1 Scope	6
2 References	6
3 Definitions and abbreviations.....	7
3.1 Definitions	7
3.2 Abbreviations	7
4 Abstract Test Method (ATM).....	8
5 Untestable test purposes	8
6 ATS conventions	9
6.1 Version of TTCN used	9
6.2 Use of ASN.1	9
6.2.1 Situations where ASN.1 is used.....	9
6.2.2 Specification of encoding rules.....	9
7 ATS to TP map.....	10
8 PCTR conformance	10
9 PIXIT conformance	10
10 ATS conformance	10
11 Configurations required in testing.....	11
Annex A (normative): Protocol Conformance Test Report (PCTR) proforma	12
A.1 Identification summary.....	12
A.1.1 Protocol conformance test report.....	12
A.1.2 IUT identification	12
A.1.3 Testing environment.....	12
A.1.4 Limits and reservations	13
A.1.5 Comments.....	13
A.2 IUT Conformance status	13
A.3 Static conformance summary	13
A.4 Dynamic conformance summary.....	13
A.5 Static conformance review report.....	14
A.6 Test campaign report.....	14
A.7 Observations.....	17
Annex B (normative): Partial PIXIT proforma.....	18
B.1 Identification summary.....	18
B.2 Abstract test suite summary	18
B.3 Test laboratory.....	18
B.4 Client (of the test laboratory)	19
B.5 System Under Test (SUT).....	19
B.6 Protocol information.....	20
B.6.1 Protocol identification	20

B.6.2	Parameter values	20
B.6.3	Actions required to provoke the IUT.....	20
B.6.4	Options supported by the IUT	21
B.6.5	Timer values.....	21
B.6.6	Information element codings.....	21
Annex C (normative): Abstract Test Suite (ATS)		22
C.1	The TTCN Graphical form (TTCN.GR)	22
C.2	The TTCN Machine Processable form (TTCN.MP).....	22
Annex D (informative): Bibliography		23
History		24

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 300 196-4 V1.2.1:2004

<https://standards.iteh.ai/catalog/standards/sist/88fcdaf5-227d-4ffb-9730-3e25804d5318/sist-en-300-196-4-v1-2-1-2004>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Services and Protocols for Advanced Networks (SPAN).

The present document is part 4 of a multi-part deliverable covering the Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol, as identified below:

- Part 1: "Protocol specification";
- Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";**
- Part 5: "Test Suite Structure and Test Purposes (TSS&TP) specification for the network";
- Part 6: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the network".

National transposition dates

Date of adoption of this EN:	9 November 2001
Date of latest announcement of this EN (doa):	28 February 2002
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 August 2002
Date of withdrawal of any conflicting National Standard (dow):	31 August 2002

This second edition contains additional test cases for the point-to-point transport mechanism (connection-oriented) for general signalling.

1 Scope

The present document specifies the Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma for the User side of the T reference point or coincident S and T reference point (as defined in ITU-T Recommendation I.411 [10]) of implementations conforming to the stage three standard for the generic functional protocol for the support of supplementary services for the pan-European Integrated Services Digital Network (ISDN) by means of the Digital Subscriber Signalling System No. one (DSS1) protocol, EN 300 196-1 [1].

EN 300 196-3 [3] specifies the Test Suite Structure and Test Purposes (TSS&TP) related to this ATS and partial PIXIT proforma. Other parts specify the TSS&TP and the ATS and partial PIXIT proforma for the Network side of the T reference point or coincident S and T reference point of implementations conforming to EN 300 196-1 [1].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] ETSI EN 300 196-1 (V1.3.2): "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [2] ETSI EN 300 196-2 (V1.3.2): "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- [3] ETSI EN 300 196-3 (V1.2.1): "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 3: Test Suite Structure and Test Purposes (TSS&TP) specification for the user".
- [4] Void.
- [5] ISO/IEC 9646-1: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts".
- [6] ISO/IEC 9646-2: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 2: Abstract test suite specification".
- [7] ISO/IEC 9646-3: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 3: The Tree and Tabular Combined Notation (TTCN)".
- [8] ISO/IEC 9646-4: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 4: Test realization".
- [9] ISO/IEC 9646-5: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 5: Requirements on test laboratories and clients for the conformance assessment process".
- [10] ITU-T Recommendation I.411 (1993): "ISDN user-network interfaces - Reference configurations".
- [11] ITU-T Recommendation X.690 (1997): "Information technology - ASN.1 encoding rules: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER)".

- [12] ITU-T Recommendation X.209 (1988): "Specification of Basic Encoding Rules for Abstract Syntax Notation One (ASN.1)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

Abstract Test Suite (ATS): See ISO/IEC 9646-1 [5].

Implementation Under Test (IUT): See ISO/IEC 9646-1 [5].

Lower Tester (LT): See ISO/IEC 9646-1 [5].

Point of Control and Observation (PCO): See ISO/IEC 9646-1 [5].

Protocol Implementation Conformance Statement (PICS): See ISO/IEC 9646-1 [5].

PICS proforma: See ISO/IEC 9646-1 [5].

Protocol Implementation eXtra Information for Testing (PIXIT): See ISO/IEC 9646-1 [5].

PIXIT proforma: See ISO/IEC 9646-1 [5].

System Under Test (SUT): See ISO/IEC 9646-1 [5].

Upper Tester (UT): See ISO/IEC 9646-1 [5].

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ATM	Abstract Test Method
ATS	Abstract Test Suite
BER	Basic Encoding Rules
ExTS	Executable Test Suite
IUT	Implementation Under Test
LT	Lower Tester
MOT	Means Of Testing
NCICS	Networked Call Independent Connection-oriented Signalling
PCO	Point of Control and Observation
PCTR	Protocol Conformance Test Report
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
SUT	System Under Test
TCP	Test Co-ordination Procedures
TP	Test Purpose
TTCN	Tree and Tabular Combined Notation
UT	Upper Tester

4 Abstract Test Method (ATM)

The remote test method is applied for the GFP user ATS. A Point of Control and Observation (PCO) resides at the service access point between layers 2 and 3. This PCO is named "L" (for Lower). The L PCO is used to control and observe the behaviour of the Implementation Under Test (IUT) and test case verdicts are assigned depending on the behaviour observed at this PCO.

A second "informal" PCO, called "O" (for Operator) is used to specify control but not observation above the IUT; events at this PCO are never used to generate test case verdicts. Messages sent by the tester at this PCO explicitly indicate to the operator actions which are to be performed on the SUT. This is regarded as a preferred alternative to the use of the implicit send event.

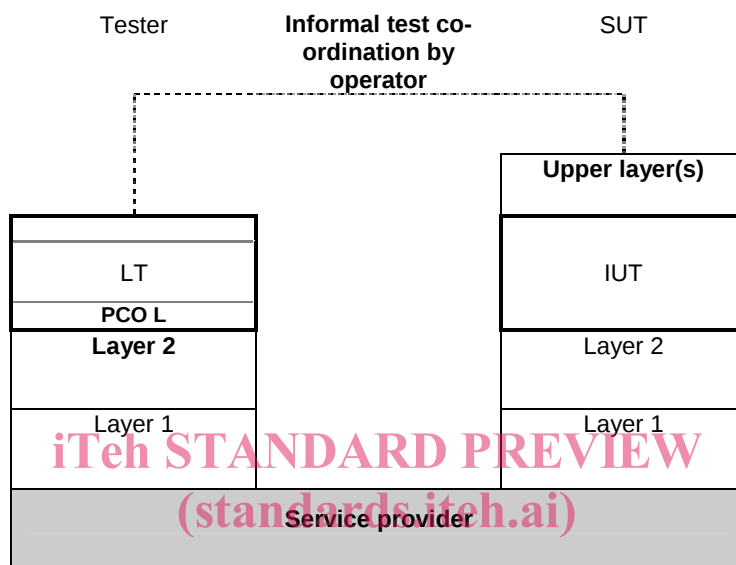


Figure 1: Remote test method with PCO O for test co-ordination

5 Untestable test purposes

Only clauses 6.2.2 and 6.2.3.2.3.2.5 of EN 300 196-3 [3] contains testable test purposes. All other test purposes are too generic and parameterized. These test purposes rather provide a general example for the behaviour that should be tested in the ATSs for supplementary services which use the generic functional protocol.

Some of the tests contained in clause 6.2.2 of EN 300 196-3 [3] are also untestable due to the fact that the call state in which the test should be performed is unstable. These are:

GFP_U7_01_003, GFP_U7_02_003, GFP_U7_03_003, GFP_U7_04_003, GFP_U7_05_003, GFP_U7_07_017, GFP_U7_07_022, GFP_U7_09_017, GFP_U7_09_021. GFP_U7_09_021

6 ATS conventions

6.1 Version of TTCN used

The version of TTCN used is that defined in ISO/IEC 9646-3 [7].

6.2 Use of ASN.1

6.2.1 Situations where ASN.1 is used

ASN.1 has been used for three major reasons. First, types defined in ASN.1 can model problems that "pure" TTCN cannot. For instance, data structures modelling ordered or unordered sequences of data are preferably defined in ASN.1. Second, ASN.1 provides a better restriction mechanism for type definitions by using sub-type definitions. Third, it is necessary to use ASN.1 to reproduce the type definitions for remote operation components as specified in the base standards.

6.2.2 Specification of encoding rules

There is a variation in the encoding rules applied to ASN.1 types and constraints specified in this ATS and therefore a mechanism is needed to differentiate the encoding rules. However the mechanism specified in ISO/IEC 9646-3 [7] does not facilitate definition of the encoding rules as needed for this ATS. A solution is therefore used which is broadly in the spirit of ISO/IEC 9646-3 [7] in which comment fields have been used as a means of encoding rules.

For ASN.1 used in this ATS, two variations of encoding rules are used. One is the commonly known Basic Encoding Rules (BER) as specified in ITU-T Recommendation X.209 [12] and ITU-T Recommendation X.690 [11]. In the second case the encoding is according to ISDN, i.e. the ASN.1 data types are a representation of structures contained within the ISDN specification (basic call, Generic functional protocol or individual supplementary service). For example, if octets of an information element are specified in ASN.1 as a SEQUENCE then this should be encoded in an Executable Test Suite (ExTS) as any other ISDN information element specified using tabular TTCN. This ISDN encoding variation is the default encoding rule for this ATS. This means that all ASN.1 constraint tables are encoded using ISDN (non-BER) encoding unless stated otherwise. BER encoding should never be applied to an ASN.1 constraint where BER encoding has not been specified.

For BER encoding, an indication is given in the comments field of the table header. For this ATS such indications appear in the ASN.1 type definitions tables only. In the table header comment field, the notation "ASN1_Encoding: BER" is used. BER coding according to ITU-T Recommendation X.690 [11]. shall be used for any type with this notation.

Note that within BER, there are a number of variations for the encoding of lengths of fields. According to EN 300 196-1 [1], an IUT should be able to interpret all length forms within BER for received PDUs. When sending PDUs containing BER encoding, EN 300 196-1 [1] gives guidelines but makes no restrictions on the length forms within BER which an IUT may apply.

Table 1: ASN.1 type constraint declaration showing use of encoding variation

ASN.1 Type Constraint Declaration			
Constraint Name	:	Beg3PTYinv	
ASN.1 Type	:	Component	
Derivation Path	:		
Comments	:	ASN1_Encoding: BER	
		Receive component: Begin3PTY invoke component	
Description			
begin3PTY_Components			
begin3PTY_InvokeComp			
{ invokeID ? ,			
operation_value localValue 4}			
Detailed comments :			