

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Digital radio mondiale (DRM) –
Part 2: Digital radio in the bands below 30 MHz – Methods of measurement for
DRM transmitters

Digital radio mondiale (DRM) –
Partie 2: Radiodiffusion numérique sur des bandes inférieures à 30 MHz –
Méthodes de mesure applicables aux émetteurs DRM



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.



IEC 62272-2

Edition 1.0 2007-03

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Digital radio mondiale (DRM) –
Part 2: Digital radio in the bands below 30 MHz – Methods of measurement for
DRM transmitters**

**Digital radio mondiale (DRM) –
Partie 2: Radiodiffusion numérique sur des bandes inférieures à 30 MHz –
Méthodes de mesure applicables aux émetteurs DRM**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

R

ICS 33.060.20

ISBN 978-2-88912-904-1

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references.....	5
3 Terms, definitions and abbreviations	6
3.1 Terms and definitions	6
3.2 Abbreviations.....	6
4 General conditions of operation.....	7
5 General conditions of measurement.....	7
5.1 Input and output measurement arrangements	7
5.2 Temperature and humidity	8
5.3 Conditions for primary power supply.....	8
5.4 Output power	8
6 General characteristics	8
6.1 Output power	8
6.2 Frequency	9
7 Transmission performance characteristics	11
7.1 Spurious emissions.....	11
7.2 Out-of-band emissions (spectrum mask).....	12
7.3 Modulation error ratio (MER).....	13
7.4 Bit error ratio (BER).....	13
8 Protection against atmospheric discharge.....	14
9 Acoustic noise	14
10 Safety.....	15
Annex A (informative) Measuring arrangements.....	16
Annex B (informative) Out-of-band emission limits for DRM transmitters.....	18
Annex C (informative) Additional measuring details	20
Figure 1 – Spectrum occupancy for 9 kHz channels	10
Figure 2 – Spectrum occupancy for 10 kHz channels	10
Figure 3 – PRBS generator	14
Figure A.1 – Arrangement A	16
Figure A.2 – Arrangement B	16
Figure A.3 – Arrangement C	17
Figure A.4 – Arrangement D.....	17
Figure B.1 – Out-of-band emission limits (upper half only of a symmetrical spectrum mask shown).....	18
Table B.1 – Out-of-band emission limits	18

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DIGITAL RADIO MONDIALE (DRM) –

**Part 2: Digital radio in the bands below 30 MHz –
Methods of measurement for DRM transmitters**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
<https://standards.iteh.ai/catalog/standards/sist/83453a31-2cae-4de6-beff-8eac55c1598c/iec-62272-2-2007>
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62272-2 has been prepared by IEC technical committee 103: Transmitting equipment for radiocommunication.

This bilingual version (2012-05) corresponds to the monolingual English version, published in 2007-03.

The text of this standard is based on the following documents:

FDIS	Report on voting
103/64/FDIS	103/66/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 62272-2:2007](https://standards.iteh.ai/catalog/standards/sist/83453a31-2cae-4de6-beff-84eac35c1c59/iec-62272-2-2007)

<https://standards.iteh.ai/catalog/standards/sist/83453a31-2cae-4de6-beff-84eac35c1c59/iec-62272-2-2007>

DIGITAL RADIO MONDIALE (DRM) –

Part 2: Digital radio in the bands below 30 MHz – Methods of measurement for DRM transmitters

1 Scope

This part of IEC 62272 describes the methods of measurement to assess the performance characteristics of digital modulated radio transmitters in the bands below 30 MHz for sound and/or data broadcasting in the LF, MF and HF bands, and to facilitate the comparison of measurements which are carried out by different personnel.

It contains details of specially selected methods for determining the most important performance parameters of digital radio transmitters. The measurement methods described apply to a limited number of performance parameters, i.e. those which can give rise to ambiguous interpretation due to the use of different methods and conditions. They are neither restrictive nor mandatory: measurements can be chosen for each particular case.

The measurement methods described in this standard are intended to be used for type approval tests, quality control tests or acceptance test measurements in factories and on site.

Fewer or additional measurements may be carried out by agreement between customer and supplier. Any additional test should comply with standards which have been established by other study groups, subcommittees of the IEC or other international or suitably accredited organizations.

<https://standards.iteh.ai/catalog/standards/sist/83453a31-2cae-4de6-beff-84eac35c1c59/iec-62272-2-2007>

This standard does not specify limiting values for acceptable performance as these are usually given in the equipment specification or in requirements laid down by the responsible regulation bodies. However, some values are quoted, where appropriate, for guidance in the presentation of the results.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60244-1, *Methods of measurement for radio transmitters – Part 1: General characteristics for broadcast transmitters*

IEC 60244-15, *Methods of measurement for radio transmitters – Part 15: Amplitude-modulated transmitters for sound broadcasting*

IEC 60215, *Safety requirements for radio transmitting equipment*

ITU *Radio Regulations*

ITU-R Recommendation V.663, *Use of certain terms linked with physical quantities*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1.1

DRM standard

digital modulation standard for frequencies in the bands below 30 MHz for the purposes of audio and data broadcasting

3.1.2

DRM transmitters

sound broadcasting transmitters operating in the bands below 30 MHz and incorporating digital modulation in accordance with IEC 62272-1¹

3.1.3

power definitions

nominal output power is the continuous DRM mean power for which the transmitter is designed

maximum output power is the maximum possible continuous DRM mean power which the transmitter can deliver. The maximum output power might be concordant with the nominal output power

minimum output power is the minimum possible continuous DRM mean power for which the transmitter is designed

3.1.4

necessary bandwidth

for a given class of emission, the width of a frequency band which is just sufficient to ensure the transmission of information at the rate and with the quality required under specified conditions (ITU definition)

For the practical purposes of this standard, the necessary bandwidth for a DRM signal can be considered to be the same as the allocated channel bandwidth, for example, 10 Hz for a standard HF channel.

3.2 Abbreviations

BER	Bit Error Ratio
BS	Broadcasting Service
DRM	Digital Radio Mondiale
FAC	Fast Access Channel
HF	High Frequency
IEC	International Electrotechnical Commission
ISO	International Organization for Standardization
ITU	International Telecommunications Union
ITU-R	International Telecommunications Union – Radiocommunications Sector
LF	Low Frequency
MER	Modulation Error Ratio
MF	Medium Frequency
MLC	Multi-Level Coding

¹ IEC 62272-1, *Digital radio mondiale – Part 1: System specification*

MSC	Main Service Channel
OFDM	Orthogonal Frequency Division Multiplex
PRBS	Pseudo-Random Bit Sequence
QAM	Quadrature Amplitude Modulation
RF	Radiofrequency
SDC	Service Description Channel
SM	Spectrum Management
Tx	Transmitter

4 General conditions of operation

Any device for the suppression of unwanted signals, irrespective of whether or not the device is located inside the transmitter, shall be considered as part of the transmitter for the purposes of this standard.

Feeders and antennas to which the transmitter might be connected are not considered part of the transmitter and therefore excluded.

Unless otherwise specified, the measurements shall be made under normal operating and environmental conditions and at the nominal output power. If required, they shall be repeated under extreme operating and environmental conditions and at any lower output power in accordance with the equipment specification.

The transmitting mode and the measured output power of the transmitter under test shall be stated.

The mains supply and the environmental conditions shall be stated with the measurement results.

[IEC 62272-2:2007](https://standards.iteh.ai/catalog/standards/sist/83453a31-2cae-4de6-beff-64cac5561c39/iec-62272-2-2007)

The transmitter shall be connected to a test load having a VSWR relative to the nominal load impedance of the transmitter not greater than

- 1,2:1 at frequencies within the designated broadcast band;
- 1,5:1 at all frequencies outside the designated broadcast band up to a frequency of 10 times the highest frequency in the designated band.

If the transmitter includes devices to control the frequency band transmitted, all the characteristics shall be measured with the devices in the circuit.

Measurement uncertainty should be calculated and techniques employed to minimize its range. This uncertainty should be applied to the limit and any measurement falling below the range is deemed acceptable.

If a digital transmitter can also operate in analogue mode, the requirements of IEC 60244-1 and IEC 60244-15 shall also apply, in addition to the requirements of this standard.

5 General conditions of measurement

5.1 Input and output measurement arrangements

For the purposes of measurement, the input and output signal arrangements are given in the form of diagrams.

Where required, the impedance of the test equipment of the transmitter under test and of all the connections between them shall be appropriately terminated, taking into account the transmitter's specification and the termination impedance of any test equipment.

These test procedures for DRM transmitters require that the test signals used shall conform to the DRM standard and that the measuring equipment is sufficiently accurate and has the necessary performance and dynamic range to provide error-free measurements of transmitter performance parameters.

5.2 Temperature and humidity

Equipment to be measured shall be operated in an environment which meets the temperature and humidity requirements as defined in their technical specifications. Temperature and humidity must never be such as to cause condensation in or on the equipment during measurements. In the absence of temperature and humidity requirements in the technical specifications, the provisions of IEC 60244-1 shall apply.

5.3 Conditions for primary power supply

The measurements are carried out at the nominal voltage and the nominal frequency of the power supply given in the relevant equipment specification.

During a series of measurements carried out as part of one test on one equipment, the voltage and frequency of the power supply shall be set at the nominal values indicated in the equipment specification.

If called for in the specification and if the power source is able to be adjusted, the test shall be repeated at the extremes of voltage and frequency stipulated in the specification.

The conditions for primary power voltage and frequency shall be specified in the equipment specification. If no voltage or frequency range is specified, the tests shall be carried out with voltage within ± 5 % of nominal and frequency within ± 2 % of nominal.

5.4 Output power

The tests shall be carried out with the transmitter set to its nominal output power and, if required, also at any other output power within the equipment specification.

6 General characteristics

6.1 Output power

6.1.1 Definition

For a digital signal with the OFDM modulation process, the power is distributed evenly throughout the transmission channel. Hence, when taking power measurements on such a signal, the total bandwidth occupied by the modulated signal shall be taken into account.

The output power of a digital modulated transmitter is defined as the mean power (thermal power) delivered at its output port, measured during an interval of time sufficiently long compared with the lowest frequency encountered in the modulation envelope, taken under normal operating condition (continuous mean power).

6.1.2 Measuring arrangement

Figure A.1 shows the measuring set-up to be used.

In general, quantifying output power relies on measuring either the thermal effects of the power dissipated in the test load or the RF voltage across it. The method chosen will depend largely on power output.

Examples are as follows:

- a) calorimetric methods;
- b) temperature-dependent component;
- c) RF power meter with thermal probe and directional coupler;
- d) spectrum analyser with directional coupler or RF probe, all of which have been suitably calibrated against a more direct measurement and for the types and combinations of signals likely to be encountered.

6.1.3 Measuring procedure

Adjust the transmitter for the appropriate output power. Measure the mean power over a time frame which is at least as long as the stabilization time of the instrumentation used for this measurement.

Since the output power value is a fundamental reference point when quantifying non-linear distortion parameters and spurious, it is recommended that the output power reading is displayed by a calibrated measuring instrument throughout all the tests.

6.1.4 Presentation of results

The results shall be presented as a value stating the output power in watts or kilowatts.

6.2 Frequency

In order to achieve effective use of the RF spectrum and limit mutual interference caused by radio services occupying adjacent channels, any departure from the channel assigned to a transmission shall be kept within strictly observed limits. These are defined by the International Telecommunication Union and are laid down in the Radio Regulations (see IEC 60244-1, Annex C).

[IEC 62272-2:2007](https://standards.iteh.ai/catalog/standards/sist/83453a31-2cae-4de6-beff-84eac35c1c59/iec-62272-2-2007)

<https://standards.iteh.ai/catalog/standards/sist/83453a31-2cae-4de6-beff-84eac35c1c59/iec-62272-2-2007>

6.2.1 Definitions

6.2.1.1 Assigned frequency

The assigned frequency is the centre of the frequency band (channel) assigned to a station.

6.2.1.2 Characteristic frequency

The term 'characteristic frequency' is used in this standard to denote the frequency component in the DRM signal that is intended to be at the centre of (one of) the channel(s) occupied by the DRM emission – the assigned frequency (see Figures 1 and 2).

Since there is usually no frequency component of the DRM signal at this frequency, it must be assessed by an indirect method.

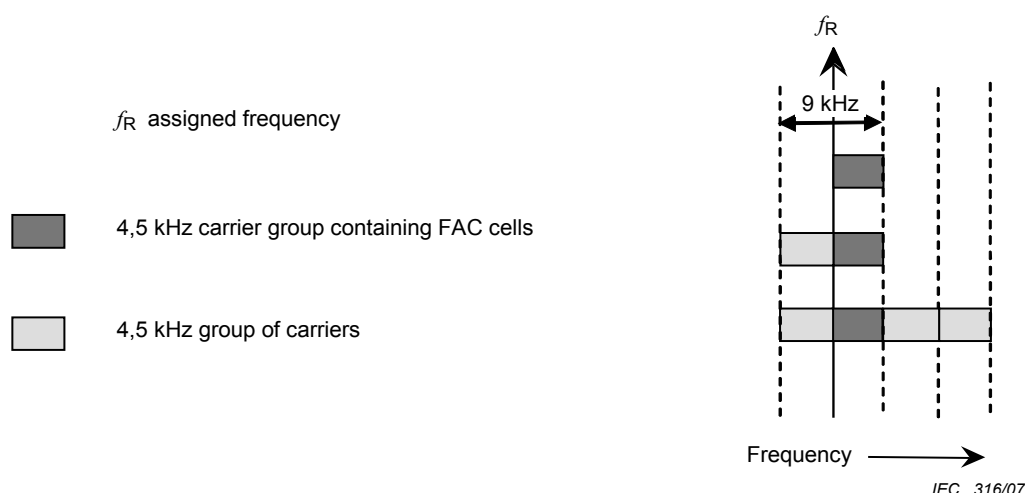


Figure 1 – Spectrum occupancy for 9 kHz channels

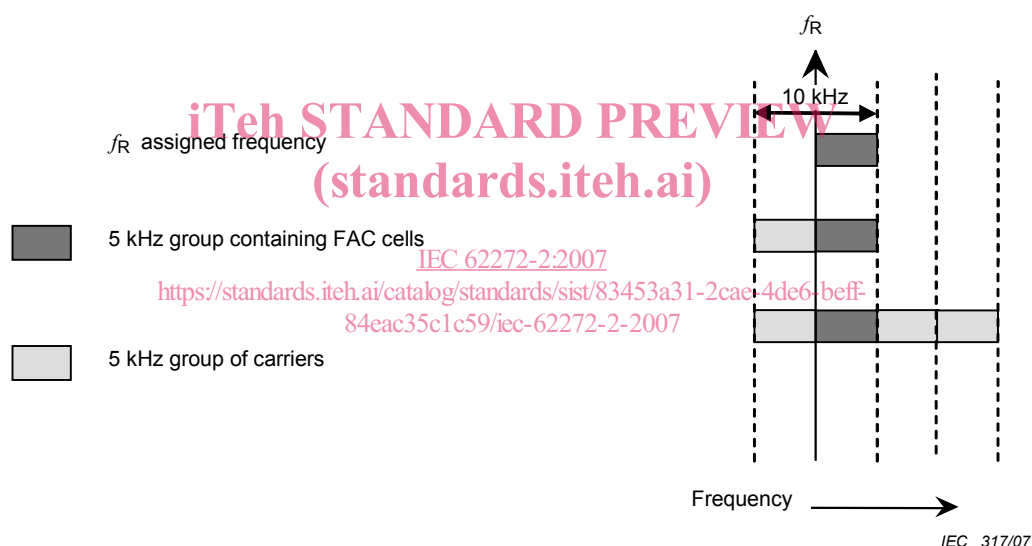


Figure 2 – Spectrum occupancy for 10 kHz channels

6.2.1.3 Frequency error

The frequency error is the difference between the assigned frequency and the characteristic frequency.

NOTE The maximum frequency error is expressed in hertz or in parts per million and should be compared with the frequency tolerance in the ITU Radio Regulations, or with the relevant standard in the equipment specification. The measurement may be carried out at any time or times within the time interval indicated in the equipment specification.

6.2.1.4 Frequency tolerance

The frequency tolerance is the permissible frequency error, expressed in hertz or in parts per million.

6.2.1.5 Frequency instability

The instability of an emission is the variation of frequency against a predetermined time scale.

NOTE A random departure from the assigned frequency is expressed as frequency error.

6.2.2 Measuring arrangement

Figure A.2 shows the measuring set-up to be used.

6.2.3 Measuring procedure

If the DRM modulator has a reference frequency output which corresponds to the characteristic frequency, this reference frequency may be measured. If the DRM modulator does not have such a reference frequency output it must be assessed by an indirect method. An informative description of an indirect measuring method is given in Clause C.2.

The characteristic frequency, the frequency tolerance and the frequency error may be measured with any suitable measuring device, such as a calibrated receiver and external frequency standard, or other instrument with measurement accuracy better than 10 times that of the equipment to be measured.

When the frequency is to be measured as a function of time (for example, frequency instability), the measurements shall be made at intervals which are short enough to reveal the presence of superimposed periodical variations. In this case, the measurement shall preferably be made with a recording instrument.

The conditions of operation shall also be given, together with the characteristic frequency.

6.2.4 Presentation of the results

Tables or graphs shall be used for frequency-instability and frequency-error results.

The accuracy of the measuring method, if known, shall be stated with the results of the measurements. If not known, an estimate should be given.

7 Transmission performance characteristics

7.1 Spurious emissions

7.1.1 Definition

A spurious emission is defined by the ITU as an emission on a frequency or frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

A detailed description of the different kind of spurious emissions is given in IEC 60244-1.

7.1.2 Measuring arrangement

Figure A.3 shows the measurement set-up to be used.

A directional coupler or an RF probe is inserted in the transmission line. The frequency response of the probe shall be taken into account. If the dynamic range of the spectrum analyser is not sufficient to provide measurements of sufficient accuracy, appropriate filters of known frequency response shall be used.