



**SLOVENSKI STANDARD**  
**SIST-TP ETSI/TR 102 016 V1.1.1:2005**  
**01-januar-2005**

---

Głrcf]lj Y]b`dfcłc\_c`]nU`bUdfYXbU`ca fYy`UfGD5 BŁĚ8 ]I ]HJbc`ca fYy`Y`n  
]bH[ f]fU`b]a ]]głrcf]lj Ua ]]fłG8 BŁĚ`AcybY`fYy]lj Y`nU`dcXdcfc`dfYbcgU`dfcłc\_c`UcX  
łc \_Y`Xc`łc \_Y`fDDDŁ

Services and Protocols for Advanced Networks (SPAN); Integrated Services Digital Network (ISDN); Potential solutions to support the transmission of PPP

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST-TP ETSI/TR 102 016 V1.1.1:2005](https://standards.iteh.ai/catalog/standards/sist/2949fb6a-1014-4d8e-8388-6dc6da0750b/sist-tp-etsi-tr-102-016-v1-1-1-2005)

Ta slovenski standard je istoveten z: **TR 102 016 Version 1.1.1**

---

**ICS:**

33.040.35	Telefonska omrežja	Telephone networks
33.080	Digitalno omrežje z integriranimi storitvami (ISDN)	Integrated Services Digital Network (ISDN)

**SIST-TP ETSI/TR 102 016 V1.1.1:2005**    en

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST-TP ETSI/TR 102 016 V1.1.1:2005](https://standards.iteh.ai/catalog/standards/sist/2949fb6a-1014-4d8e-8388-0dc8da8730f9/sist-tp-etsi-tr-102-016-v1-1-1-2005)

<https://standards.iteh.ai/catalog/standards/sist/2949fb6a-1014-4d8e-8388-0dc8da8730f9/sist-tp-etsi-tr-102-016-v1-1-1-2005>

# ETSI TR 102 016 V1.1.1 (2001-11)

---

*Technical Report*

**Services and Protocols for Advanced Network (SPAN);  
Integrated Services Digital Network (ISDN);  
Potential solutions to support the transmission of PPP**

---

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST-TP ETSI/TR 102 016 V1.1.1:2005](https://standards.iteh.ai/catalog/standards/sist/2949fb6a-1014-4d8e-8388-0dc8da8730f9/sist-tp-etsi-tr-102-016-v1-1-1-2005)

<https://standards.iteh.ai/catalog/standards/sist/2949fb6a-1014-4d8e-8388-0dc8da8730f9/sist-tp-etsi-tr-102-016-v1-1-1-2005>



---

**Reference**

DTR/SPAN-130248

---

**Keywords**

ISDN, transmission

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST-TP ETSI/TR 102 016 V1.1.1:2005](https://standards.iteh.ai/catalog/standards/sist/2949fb6a-1014-4d8e-8388-0dc8da8730f9/sist-tp-etsi-tr-102-016-v1-1-1-2005)

<https://standards.iteh.ai/catalog/standards/sist/2949fb6a-1014-4d8e-8388-0dc8da8730f9/sist-tp-etsi-tr-102-016-v1-1-1-2005>

---

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

[editor@etsi.fr](mailto:editor@etsi.fr)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.  
All rights reserved.

---

## Contents

Intellectual Property Rights .....	4
Foreword.....	4
1 Scope .....	5
2 References .....	5
3 Definitions and abbreviations.....	5
3.1 Definitions .....	5
3.2 Abbreviations .....	5
4 Description .....	6
5 LAPD restrictions.....	6
6 PPP over LAPD (PPPoLAPD).....	6
7 MP over LAPD (MPoLAPD).....	7
8 Conclusion.....	9
History .....	10

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST-TP ETSI/TR 102 016 V1.1.1:2005](https://standards.iteh.ai/catalog/standards/sist/2949fb6a-1014-4d8e-8388-0dc8da8730f9/sist-tp-etsi-tr-102-016-v1-1-1-2005)

<https://standards.iteh.ai/catalog/standards/sist/2949fb6a-1014-4d8e-8388-0dc8da8730f9/sist-tp-etsi-tr-102-016-v1-1-1-2005>

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Report (TR) has been produced by ETSI Technical Committee Services and Protocols for Advanced Networks (SPAN).

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST-TP ETSI/TR 102 016 V1.1.1:2005](https://standards.iteh.ai/catalog/standards/sist/2949fb6a-1014-4d8e-8388-0dc8da8730f9/sist-tp-etsi-tr-102-016-v1-1-1-2005)

<https://standards.iteh.ai/catalog/standards/sist/2949fb6a-1014-4d8e-8388-0dc8da8730f9/sist-tp-etsi-tr-102-016-v1-1-1-2005>

---

## 1 Scope

The present document gives guidance on potential solutions to support the transmission of Point-to-Point Protocol (PPP) packets over the D channel of an ISDN access without the need of an X.25 virtual circuit as used and defined in the Always On/Dynamic ISDN (AO/DI) [1] networking service.

---

## 2 References

For the purposes of this Technical Report, the following references apply:

- [1] IETF, PPP extensions, draft-ietf-pppext-aodi-02: "Always On/Dynamic ISDN (AO/DI)" (<http://www.ietf.org/proceedings/00jul/I-D/pppext-aodi-02.txt>)
- [2] IETF, RFC1548: "The Point-to-Point Protocol (PPP)".
- [3] IETF, RFC1990: "The PPP Multilink Protocol (MP)".
- [4] ITU-T Recommendation Q.921: "ISDN User-Network interface - Data link layer specification".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following term and definition applies:

**Always On/Dynamic ISDN (AO/DI):** networking service that provides an always-available connection to TCP/IP based services

<https://standards.iteh.ai/catalog/standards/sist/2949fb6a-1014-4d8e-8388-0dc8da8730f9/sist-tp-etsi-tr-102-016-v1-1-1-2005>

### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AO/DI	Always On/Dynamic ISDN
IETF	Internet Engineering Task Force
IP	Internet Protocol
ISDN	Integrated Services Digital Network
LAPD	Link Access Protocol on channel D
LCP	Link Control Protocol
MP	Multilink Protocol
MPoLAPD	Multilink Protocol over LAPD
MRRU	Maximum Receive Reconstructed Unit
MRU	Maximum Receive Unit
MTU	Maximum Transfer Unit
NCP	Network Control Protocol
PPP	Point-to-Point Protocol
PPPoLAPD	Point-to-Point Protocol over LAPD
RFC	Request For Comment
SAPI	Service Access Point Identifier
TCP/IP	Transmission Control Protocol/IP
TCP/UDP	Transmission Control Protocol/UDP
TEI	Terminal End-point Identifier
UDP	User Data Protocol

## 4 Description

AO/DI [1] is a networking service that provides an always-available connection to TCP/IP based services. This service is provided to ISDN subscribers; an ISDN D channel permanent logical link is established between the subscriber and a packet handler, a X.25 virtual circuit is then established between the subscriber and his Internet service provider. This virtual circuit is used to establish an Internet connection, when bandwidth is required for the transmission of Internet data (downstream and/or upstream), one or two B channels are established.

The present document gives guidance on potential solutions to support the transmission of Point-to-point Protocol (PPP) packets over the D channel of an ISDN access without the need of an X.25 virtual circuit as used and defined in the Always On/Dynamic ISDN (AO/DI) networking service.

## 5 LAPD restrictions

Whereas fragmentation exists at X.25 level, using bit M (More), there is no such mechanism within LAPD. As specified by ITU-T Recommendation Q.921 [4], the maximum number of octets in the information field is 260, thus the internet packets shall fit into these 260 octets.

The LAPD address and control fields pair shall be defined for the implementation. The address field is composed of the SAPI and TEI values. The SAPI standardized values do not suit for the implementation of PPP over LAPD (values 0, 12, 16 or 63). A new codepoint is preferred for the identification of internet traffic on an ISDN access. For the allocation of the TEI value, two methods are available: TEI value assigned non-automatically or automatically. Having a non-automatically assigned value ([0; 63]) will limit the responsibility of the local exchange which will have in charge a routing function. But as a procedure for the allocation of a TEI value already exists in all local exchange, it could be re-used for the allocation of a TEI value ([64; 128]). To be respectful with TEI assignment for permanent logical links using SAPI 16, a similar solution shall be implemented for the allocation of TEI values for the transportation of internet packets over the D channel, i.e. a non-automatically assigned value method.

The control field shall be encoded as "unnumbered information" as the management entity does not request acknowledgement of the transferred information.

The LAPD header shall be encoded as shown in table 1.

**Table 1: LAPD frame global structure to transfer internet packets**

8	7	6	5	4	3	2	1	
Flag (0x7E)								octet 1
SAPI						C	0	2
TEI							1	3
0	0	0	P	0	0	1	1	4
Information (260 octets)								5
								...
FCS (first octet)								N-2
FCS (second octet)								N-1
Flag (0x7E)								N

## 6 PPP over LAPD (PPPoLAPD)

The length of a PPP frame is fixed by parameter Maximum Receive Unit (MRU) which is negotiated at the beginning of any PPP session, during the first negotiation phase using the Link Control Protocol (LCP). There are three basic phases of negotiation: Link Control Protocol (LCP) negotiation, Authentication & Link Quality Management and Network Control Protocol (NCP) negotiation. The MRU is used for both subsequent NCP negotiation messages and user data messages. The MRU value shall be negotiated to transfer the largest negotiation message or any user IP datagram. If the negotiated MRU is too small, it may need to be altered to allow authentication procedure.




The value of the MRU is a two octets length parameter. This value is the maximum size of a PPP information field that the implementation can receive; it does not include the LAPD address, control or check fields or the PPP protocol field. As the LAPD frame structure limits to 260 octets the size of the information field, the MRU shall be fixed to 258 octets (2 octets are reserved for the PPP protocol field).

Table 2 shows the LAPD information field.

**Table 2: LAPD information field of a LAPD frame**

8	7	6	5	4	3	2	1	
PPP								octet 1
protocol								2
PPP information & padding (258 octets)								...
								260

PPP does not include any fragmentation mechanism (PPP Multilink Protocol does), thus having a 258 octets length PPP information and padding fields limits the size of an IP datagram up to 258 octets. It is at the IP level that a fragmentation mechanism is implemented. Each TCP packet or UDP datagram would be fragmented into small parts that are encapsulated into IP datagrams. Figure 1 shows the PPP, IP, TCP or UDP layers.

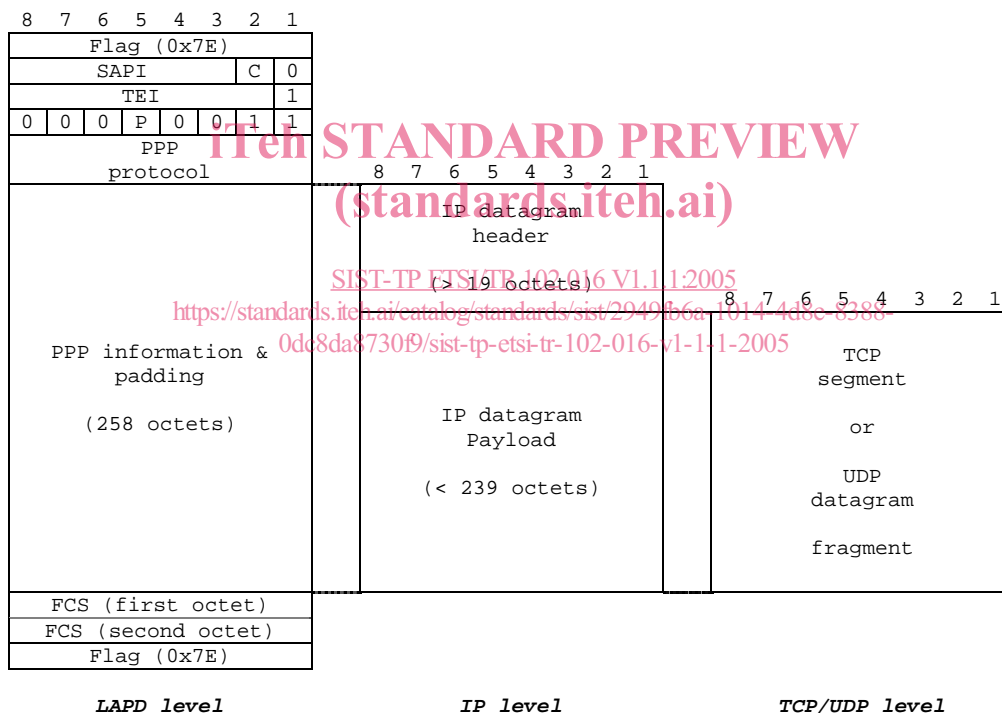

**Figure 1: LAPD, IP, TCP/UDP layers**

## 7 MP over LAPD (MPoLAPD)

A second solution to implement internet protocols over LAPD of an ISDN access is to use the PPP Multilink Protocol (MP) [1]. MP specifies a means to negotiate MP mode, detect the establishment of new links (termed bundling), detect fragment loss, and fragment and reassemble messages. MP does not specify when (or even if) additional links should be established, or when to drop links, or how to acquire necessary telephone numbers.

MP may be used on a single link to increase the effective MRU for the network layer protocols when the negotiated MRU is too small for the intended application or can't be changed due to hardware or serial driver specifications.