



# SLOVENSKI STANDARD

## SIST EN 300 686 V1.2.1:2004

01-oktober-2004

---

**Dostop in terminali (AT) - Digitalni zakupljeni vodi za prenosni hitrosti 34 Mbit/s in 140 Mbit/s (D34U, D34S, D140U, D140S) - Omrežni vmesnik**

Access and Terminals (AT); 34 Mbit/s and 140 Mbit/s digital leased lines (D34U, D34S, D140U, D140S); Network interface presentation

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

**Ta slovenski standard je istoveten z: EN 300 686 Version 1.2.1**  
<https://standards.iteh.ai/catalog/standards/sist/84c19781-acb8-454d-83cd-d94abc306aa1/sist-en-300-686-v1-2-1-2004>

---

**ICS:**

33.040.50	Vodi, zveze in tokokrogi	Lines, connections and circuits
-----------	--------------------------	---------------------------------

**SIST EN 300 686 V1.2.1:2004**

**en**

## **iTeh STANDARD PREVIEW** **(standards.iteh.ai)**

SIST EN 300 686 V1.2.1:2004

<https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d94abe306aa1/sist-en-300-686-v1-2-1-2004>

# ETSI EN 300 686 V1.2.1 (2001-07)

---

*European Standard (Telecommunications series)*

**Access and Terminals (AT);  
34 Mbit/s and 140 Mbit/s digital leased lines  
(D34U, D34S, D140U, D140S);  
Network interface presentation**

---

**iTeh STANDARD PREVIEW  
(standards.iteh.ai)**

[SIST EN 300 686 V1.2.1:2004](https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d94abe306aa1/sist-en-300-686-v1-2-1-2004)

<https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d94abe306aa1/sist-en-300-686-v1-2-1-2004>



---

**Reference**REN/AT-020008

---

---

**Keywords**interface, leased line, network

---

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 300 686 V1.2.1:2004

<https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d94abe306aa1/sist-en-300-686-v1-2-1-2004>

---

**Important notice**

---

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:  
editor@etsi.fr

---

**Copyright Notification**

---

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.  
All rights reserved.

# Contents

Intellectual Property Rights .....	5
Foreword .....	5
Introduction .....	6
1 Scope .....	7
2 References .....	7
3 Definitions and abbreviations .....	8
3.1 Definitions .....	8
3.2 Abbreviations .....	8
4 Requirements .....	9
4.1 Mechanical characteristics .....	9
4.2 Electrical characteristics -34 Mbit/s .....	10
4.2.1 Output port .....	10
4.2.1.1 Signal coding at the output port .....	10
4.2.1.2 Waveform shape .....	10
4.2.1.3 Output timing under failure conditions .....	11
4.2.1.4 Output return loss .....	11
4.2.1.5 Output timing and jitter .....	11
4.2.2 Input port .....	12
4.2.2.1 Signal coding at the input port .....	12
4.2.2.2 Input return loss .....	12
4.2.2.3 Input loss tolerance .....	12
4.2.2.4 Immunity against reflections .....	12
4.2.2.5 Input timing and jitter tolerance .....	12
4.3 Electrical characteristics -140 Mbit/s .....	13
4.3.1 Output port .....	13
4.3.1.1 Signal coding at the output port .....	13
4.3.1.2 Waveform shape .....	13
4.3.1.3 Output timing under failure conditions .....	15
4.3.1.4 Output return loss .....	15
4.3.1.5 Output timing and jitter .....	16
4.3.2 Input port .....	16
4.3.2.1 Signal coding at the input port .....	16
4.3.2.2 Input return loss .....	16
4.3.2.3 Input loss tolerance .....	16
4.3.2.4 Input timing and jitter tolerance .....	16
4.4 Safety .....	16
4.5 Overvoltage .....	16
4.6 ElectroMagnetic Compatibility (EMC) .....	17
<b>Annex A (normative): Test methods .....</b>	<b>18</b>
A.1 General .....	18
A.1.1 Additional information to support the test .....	18
A.1.2 Equipment connection .....	18
A.2 Test methods .....	19
A.2.1 Signal coding at the output port .....	19
A.2.1.1 Signal coding at the output port -34 Mbit/s .....	19
A.2.1.2 Signal coding at the output port -140 Mbit/s .....	20
A.2.2 Waveform shape at the output port .....	20
A.2.2.1 Waveform shape at the output port -34 Mbit/s .....	20
A.2.2.2 Waveform shape at the output port -140 Mbit/s .....	21
A.2.3 Output timing under failure conditions .....	22
A.2.4 Input signal coding, loss tolerance and immunity against reflections .....	23

A.2.4.1	Input signal coding, loss tolerance and immunity against reflections -34 Mbit/s.....	23
A.2.4.2	Input signal coding and loss tolerance -140 Mbit/s.....	24
A.2.5	Input return loss .....	25
A.2.6	Output return loss .....	26
<b>Annex B (normative):</b>	<b>Definition of HDB3 code.....</b>	<b>27</b>
B.1	General.....	27
B.2	Definition .....	27
<b>Annex C (normative):</b>	<b>Definition of CMI code .....</b>	<b>28</b>
C.1	General.....	28
C.2	Definition .....	28
<b>Annex D (informative):</b>	<b>Bibliography.....</b>	<b>29</b>
History	.....	30

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 300 686 V1.2.1:2004](https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d94abe306aa1/sist-en-300-686-v1-2-1-2004)

<https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d94abe306aa1/sist-en-300-686-v1-2-1-2004>

# Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Access and Terminals (AT).

The present document resulted from a mandate from the Commission of the European Community (CEC) to provide standards for the support of the Directive on Open Network Provision (ONP) of leased lines (92/44/EEC).

There are four other standards directly related to the present document:

- EN 300 687: "Access and Terminals (AT); 34 Mbit/s digital leased lines (D34U and D34S); Connection characteristics";
- EN 300 688: "Access and Terminals (AT); 140 Mbit/s digital leased lines (D140U and D140S); Connection characteristics";
- EN 300 689: "Access and Terminals (AT); 34 Mbit/s digital leased lines (D34U and D34S); Terminal equipment interface";
- EN 300 690: "Access and Terminals (AT); 140 Mbit/s digital leased lines (D140U and D140S); Terminal equipment interface".

The present document is based on information from ITU-T Recommendations and ETSI publications and the relevant documents are quoted where appropriate.

National transposition dates	
Date of adoption of this EN:	29 June 2001
Date of latest announcement of this EN (doa):	30 September 2001
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 March 2002
Date of withdrawal of any conflicting National Standard (dow):	31 March 2002

---

## Introduction

The Council Directive on the application of Open Network Provision (ONP) to leased lines (92/44/EEC) (see annex D) concerns the harmonization of conditions for open and efficient access to, and use of, the leased lines provided over public telecommunications networks, and the availability throughout the European Union of a minimum set of leased lines with harmonized technical characteristics.

The 34 Mbit/s and 140 Mbit/s unstructured and structured leased lines are not part of the minimum set of leased lines under the leased line Directive, however these standards are being written with the intention that where 34 Mbit/s or 140 Mbit/s leased lines are offered, they will be in accordance with these harmonized standards.

Under the Directive 91/263/EEC (see annex D), later replaced by 98/13/EC (see annex D), terminal equipment for connection to these leased lines was required to fulfil certain essential requirements.

The present version of the present document has been produced to introduce some necessary changes.

ETS 300 166 (see annex D) and ITU-T Recommendation G.703 [4] were used as the basis for the interface presentation requirements.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 300 686 V1.2.1:2004](https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d94abe306aa1/sist-en-300-686-v1-2-1-2004)

<https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d94abe306aa1/sist-en-300-686-v1-2-1-2004>



# 1 Scope

The present document specifies the technical requirements and conformance tests for the network interface presentations of 34 Mbit/s and 140 Mbit/s digital leased lines. This includes:

- the 34 Mbit/s Digital Unstructured leased line operating at 34 368 kbit/s;
- the 140 Mbit/s Digital Unstructured leased line operating at 139 264 kbit/s;
- the 34 Mbit/s digital structured leased line operating at 34 368 kbit/s for the support of an unstructured 33 920 kbit/s information transfer rate;
- the 140 Mbit/s digital structured leased line operating at 139 264 kbit/s for the support of an unstructured 138 240 kbit/s information transfer rate.

A connection is presented via interfaces at Network Termination Points (NTPs). The present document defines the network interface as presented by the leased line provider and should be used in conjunction with the appropriate companion standard, EN 300 687 [6] (34 Mbit/s) or EN 300 688 [7] (140 Mbit/s), which specifies the connection characteristics between NTPs of the leased line. The present document and the appropriate connection characteristics standard together describe the technical characteristics of the relevant leased line.

The present document is applicable to leased lines, including part time leased lines, whose establishment or release does not require any protocol exchange or other intervention at the NTP.

The present document covers the mechanical and electrical characteristics (except safety, overvoltage and EMC aspects) of the network interface and specifies the conformance tests for equipment of the kind that provides the interface presentation. Some of the tests described in the present document are not designed to be applied to the interface of an installed leased line; such tests may be applied to equipment of the kind used to provide the interface. The present document does not include details concerning the implementation of the tests nor does it include information on any regulations concerning testing. There is no requirement for each leased line to be tested in accordance with the present document before it is brought into service or returned into service following repair.

<https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d94abc306aa1/sist-en-300-686-v1-2-1-2004>

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] IEC 60169-8 (1978): "Radio frequency connectors - Part 8: R.F. coaxial connectors with inner diameters of outer conductor 6,5 mm (0,256 in) with bayonet lock - Characteristic impedance 50 ohms (Type BNC)".
- [2] IEC 60169-13 (1976): "Radio frequency connectors - Part 13: R.F. coaxial connectors with inner diameter of outer conductor 5,6 mm (0,22 in) - Characteristic impedance 75 ohms (Type 1,6/5,6) - Characteristic impedance 50 ohms (Type 1,8/5,6) with similar mating dimensions".
- [3] ISO/IEC 10173 (1998): "Information technology-Telecommunications and information exchange between systems-Interface connector and contact assignments for ISDN primary rate access connector located at reference points S and T".
- [4] ITU-T Recommendation G.703 (1998): "Physical/electrical characteristics of hierarchical digital interfaces".

- [5] ITU-T Recommendation O.151 (1992): "Error performance measuring equipment operating at the primary rate and above".
- [6] ETSI EN 300 687: "Access and Terminals (AT); 34 Mbit/s digital leased lines (D34U and D34S); Connection characteristics".
- [7] ETSI EN 300 688: "Access and Terminals (AT); 140 Mbit/s digital leased lines (D140U and D140S); Connection characteristics".
- [8] ETSI EN 300 689: "Access and Terminals (AT); 34 Mbit/s digital leased lines (D34U and D34S); Terminal equipment interface".
- [9] ETSI EN 300 690: "Access and Terminals (AT); 140 Mbit/s digital leased lines (D140U and D140S); Terminal equipment interface".

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

**leased lines:** telecommunications facilities provided by a public telecommunications network that provide defined transmission characteristics between network termination points and that do not include switching functions that the user can control, (e.g. on-demand switching)

**Network Termination Point (NTP):** all physical connections and their technical access specifications which form part of the public telecommunications network and are necessary for access to and efficient communication through that public network

**PRBS(2<sup>23</sup>-1):** Pseudo Random Bit Sequence (PRBS) (as defined in clause 2.2 of ITU-T Recommendation O.151 [5])

<https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d94abe306aa1/sist-en-300-686-v1-2-1-2004>

### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ac	alternating current
AMI	Alternate Mark Inversion
BNC	Bayonet Nut Connector
CMI	Coded Mark Inversion
D140S	140 Mbit/s Digital Structured leased line
D140U	140 Mbit/s Digital Unstructured leased line
D34S	34 Mbit/s Digital Structured leased line
D34U	34 Mbit/s Digital Unstructured leased line
dc	direct current
EMC	ElectroMagnetic Compatibility
HDB3	High Density Bipolar code 3
NTP	Network Termination Point
ONP	Open Network Provision
ppm	parts per million
PRBS	Pseudo Random Bit Sequence
RX	RX is a signal input (at either the leased line interface or the test equipment, see figure 1)
TX	TX is a signal output (at either the leased line interface or the test equipment, see figure 1)

## 4 Requirements

These requirements define the network interface presentation for:

- the 34 Mbit/s Digital Unstructured leased line (D34U) which provides a bi-directional point-to-point digital transmission capability with a usable bit rate of 34 368 kbit/s - no structuring of the data is provided, or shall be required, by the network and any structuring is the responsibility of the user;
- the 140 Mbit/s Digital Unstructured leased line (D140U) which provides a bi-directional point-to-point digital transmission capability with a usable bit rate of 139 264 kbit/s - no structuring of the data is provided, or shall be required, by the network and any structuring is the responsibility of the user;
- the 34 Mbit/s Digital Structured leased line (D34S) which provides a bi-directional point-to-point digital transmission capability for the support of an unstructured 33 920 kbit/s information transfer rate; the frame structure in the 34 368 kbit/s bit stream is defined in EN 300 687 [6] - any structuring of the data within the transparent 33 920 kbit/s part of the frame is the responsibility of the user;
- the 140 Mbit/s Digital Structured leased line (D140S) which provides a bi-directional point-to-point digital transmission capability for the support of an unstructured 138 240 kbit/s information transfer rate; the frame structure in the 139 264 kbit/s bit stream is defined in EN 300 688 [7] - any structuring of the data within the transparent 138 240 kbit/s part of the frame is the responsibility of the user.

The provision of timing is the responsibility of the user, however in certain installations, the leased line provider may be able to offer a service which is synchronized to the network.

NOTE 1: The network interface is not designed for power feeding capabilities.

NOTE 2: If equipment providing the interface requires a mains supply, the leased line provider should bring this to the attention of the user so that the user can provide mains supply back-up facilities, if required.

The mechanical characteristics, safety, overvoltage protection requirements and ElectroMagnetic Compatibility (EMC) requirements are common for the 34 Mbit/s and 140 Mbit/s leased lines. The electrical characteristics are different and are defined in separate clauses.

<https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d94abe306aa1/sist-en-300-686-v1-2-1-2004>

### 4.1 Mechanical characteristics

**Requirement:** The network interface shall provide two coaxial 75  $\Omega$  sockets, one each for transmit and receive, these sockets being either:

- a) 75  $\Omega$  sockets (type 1,6/5,6) complying with IEC 60169-13 [2]; or
- b) 75  $\Omega$  BNC sockets complying with the general requirements of IEC 60169-8 [1] with the mating dimensions specified in annex B of ISO/IEC 10173 [3].

The outer conductor of the coaxial pair shall be connected to signal ground both at the input port and at the output port.

NOTE 1: When connecting the terminal equipment to the Network Termination Point (NTP), any difference in ground potential between the two equipments may produce a voltage across the signal ground connection and may cause damage. See EN 50310 (see annex D) for details of earthing requirements within the customer's premises.

NOTE 2: The transmit pair is the output from the network interface. The receive pair is the input to the network interface, as shown in figure 1. Where the terms "output" and "input" are used without qualification in the present document, they refer to the network interface.

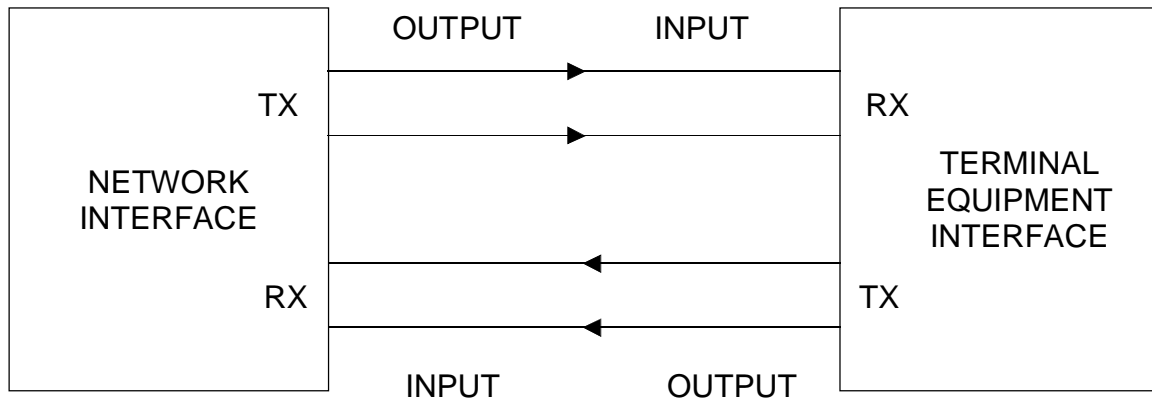


Figure 1

**Test:** There shall be a visual inspection that the sockets are of the correct type.

## 4.2 Electrical characteristics -34 Mbit/s

### 4.2.1 Output port

#### 4.2.1.1 Signal coding at the output port

**Requirement:** The signal transmitted at the output port shall comply with the High Density Bipolar code 3 (HDB3) encoding rules (see annex B).

**Test:** The test shall be conducted according to clause A.2.1.1.

#### 4.2.1.2 Waveform shape

[SIST EN 300 686 V1.2.1:2004](https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d04e336c01b6/en-300-686-v1-2-2004)

<https://standards.iteh.ai/catalog/standards/sist/84e19781-aeb8-434d-83cd-d04e336c01b6/en-300-686-v1-2-2004>

**Requirement:** The pulse at the output port shall comply with the requirements given in figure 2 and table 1, based on ITU-T Recommendation G.703 [4].

**Test:** The test shall be conducted according to clause A.2.2.1.

**Table 1: Waveform shape at output port**

Pulse shape (nominally rectangular)	All marks of a valid signal shall conform to the mask (see figure 2). The value V corresponds to the nominal peak voltage of a mark.
Test load impedance	75 $\Omega$ non-reactive
Nominal peak voltage V of a mark	1,0 V
Peak voltage of a space	0 $\pm$ 0,1 V
Nominal pulse width	14,55 ns
Ratio of the amplitudes of positive and negative pulses at the centre of the pulse interval	0,95 to 1,05
Ratio of the widths of positive and negative pulses at the nominal half amplitude	0,95 to 1,05