
International Standard



5611

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Cartridges, type A, for indexable inserts — Dimensions

Cartouches du type A, à plaquettes amovibles — Dimensions

First edition — 1981-08-01

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 5611:1981](https://standards.iteh.ai/catalog/standards/sist/6708d0bf-de19-4952-9705-385821f4dae7/iso-5611-1981)

<https://standards.iteh.ai/catalog/standards/sist/6708d0bf-de19-4952-9705-385821f4dae7/iso-5611-1981>

UDC 621.941.025.7

Ref. No. ISO 5611-1981 (E)

Descriptors : lathe tools, inserts, tool holders, dimensions, cutting angles.

Price based on 6 pages

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 5611 was developed by Technical Committee ISO/TC 29, *Small tools*, and was circulated to the member bodies in October 1977.

It has been approved by the member bodies of the following countries :

Australia
Austria
Belgium
Brazil
Chile
Czechoslovakia
France
Germany, F. R.
Hungary

India
Israel
Italy
Japan
Korea, Dem. P. Rep. of
Korea, Rep. of
Mexico
Netherlands
Poland

ISO 5611:1981

Romania

South Africa, Rep. of

Spain

Sweden

Switzerland

United Kingdom

USA

USSR

Yugoslavia

<http://standards.iteh.ai/catalog/standards/sist/6708d0bf-de19-4952-9705-38582144005/iso-5611-1981>

No member body expressed disapproval of the document.

Cartridges, type A, for indexable inserts — Dimensions

iTeh STANDARD PREVIEW
(standards.iteh.ai)

1 Scope and field of application

This International Standard lays down the general dimensions of type A cartridges for indexable inserts, and includes preferred cartridges (see clause 6).

2 References

ISO 883, *Indexable (throwaway) carbide inserts without fixation hole — Dimensions.*

ISO 3002/1, *Geometry of the active part of cutting tools — Part 1 : General terms, reference systems, tool and working angles.*

ISO 3364, *Indexable (throwaway) carbide inserts with cylindrical fixation hole — Dimensions.*

ISO 5608, *Turning and copying tool holders and cartridges for indexable (throwaway) inserts — Designation.*¹⁾

3 Designation

3.1 The identification system for cartridges is given in ISO 5608.

3.2 Cartridges covered by this International Standard are designated as type A. Hence, the symbol CA shall be applied in reference ⑦ of the code of symbolization.

3.3 For cartridges with lengths according to this International Standard, a dash replaces the letter symbol identifying tool length.

For cartridges of lengths other than those specified in this International Standard, letter symbols to be used for tool length are given in ISO 5608, sub-clause 3.8.

1) At present at the stage of draft.



4 Dimensions

4.1 Shank

The following dimensions apply to shanks of all cartridge styles :

— for cartridges having $h_1 = 10, 12, 16$ and 20 mm

— for cartridges having $h_1 = 25$ mm

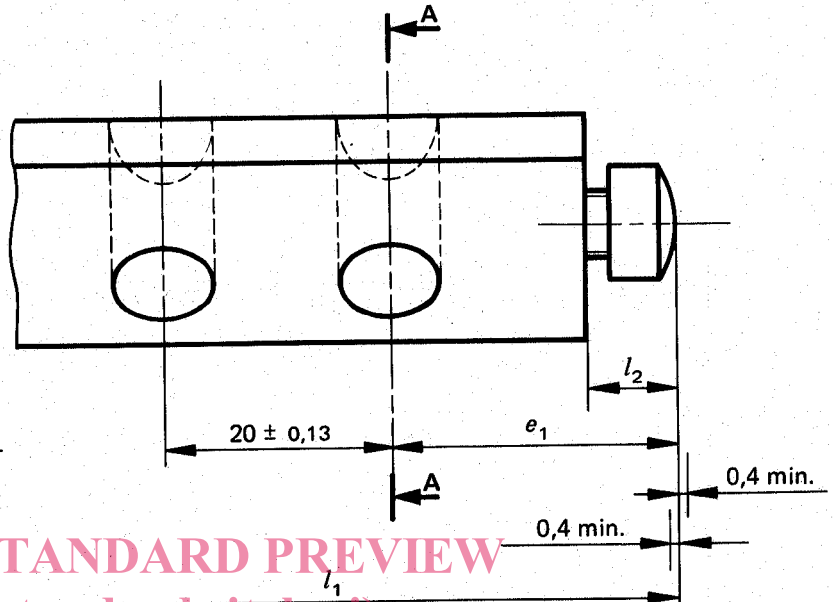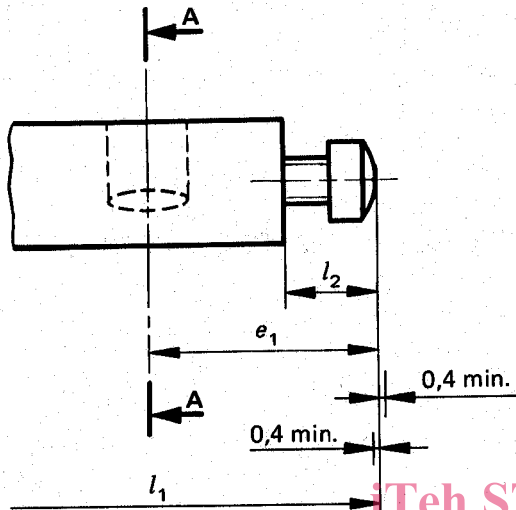

Section A-A



STANDARD PREVIEW
(standards.iteh.ai)

— for cartridges having $h_1 = 10$ and 12 mm

— for cartridges having $h_1 = 16, 20$ and 25 mm

ISO 5611:1981

<https://standards.iteh.ai/catalog/standards/sist/6708d0bf-de19-4958-9705-385821f4dae7/iso-5611-1981>

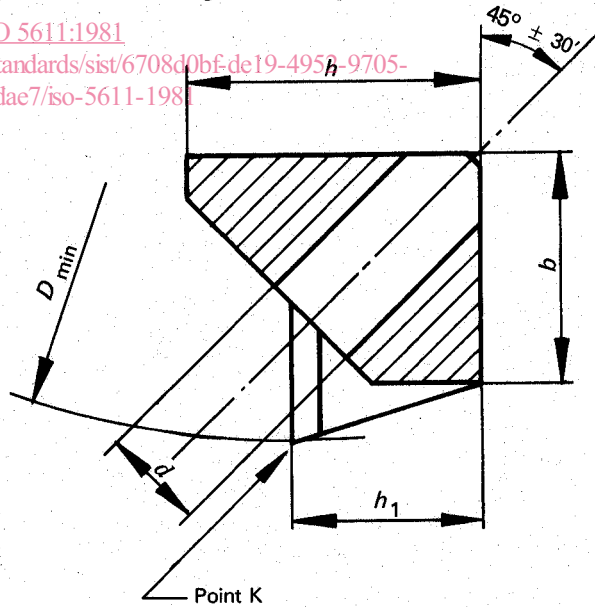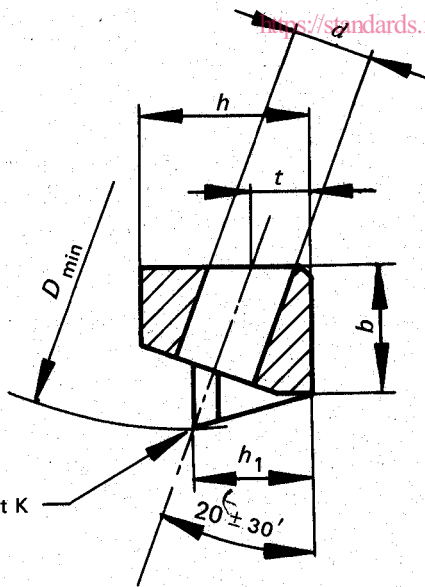

Dimensions in millimetres

h_1 $\pm 0,08$	h max.	b max.	e_1	l_2	t $\pm 0,13$	d	Fastening screw
10	15	11	20	8	5	7	M6
12	20	16	20	8	6	7	M6
16	25	20	25	8	0	9	M8
20	30	20	30	10	0	9	M8
25	35	25	30	10	0	11	M10

Figure 1

4.2 Application of dimensions l_1 , f and h_1

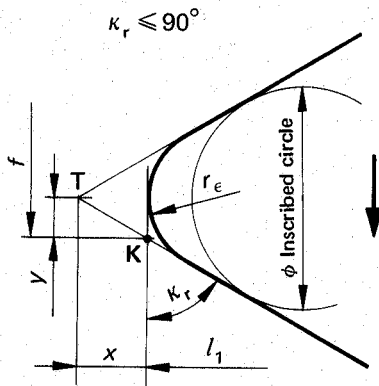


Figure 2

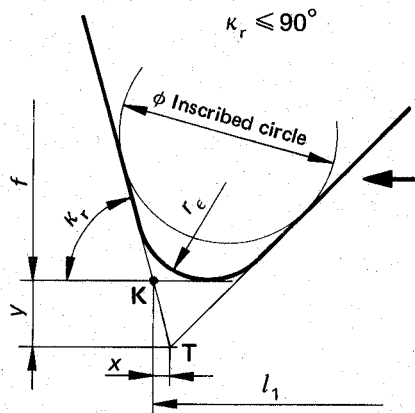


Figure 3

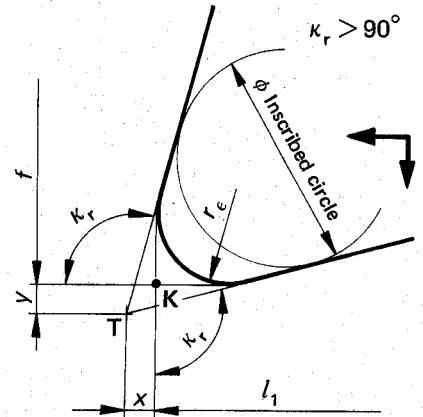


Figure 4

4.2.1 The length dimension l_1 is the distance from the specified point K (see figures 2, 3 and 4) to the end of the shank, including the adjusting screw length l_2 in its mid position.

Dimension f is the distance between the specified point K and the rear backing surface of the cartridge, measured over a master insert.

Dimension h_1 is the height to the specified point K measured over a master insert.

The values of l_1 , f and h_1 according to clause 6 are given for cartridges equipped with master inserts having corner radii according to 4.2.3.

4.2.2 The specified point K is :

- for $\kappa < 90^\circ$ (figures 2 and 3), the point of intersection of the tangent to the rounded corner with the prolongation of the major cutting edge;
- for $\kappa > 90^\circ$ (figure 4), the point of intersection of two mutually perpendicular tangents to the rounded corner.

4.2.3 The corner radius r_ϵ of the master inserts used for the definition of dimensions l_1 , f and h_1 , is a function of the diameter of the inscribed circle of the insert, as follows :

Dimensions in millimetres

Diameter of the inscribed circle	6,35	7,94	9,525	12,70	15,875	19,05
Corner, radius r_ϵ (nominal)	0,4		0,8		1,2	

NOTE — Dimensions l_1 , f and h_1 assume corner radii converted from inch values, i.e. $r_\epsilon = 0,397 - 0,794$ and $1,191$ mm.

4.2.4 Cartridges may be equipped with inserts having the size according to clause 6 and any corner radius r_ϵ . For corner radii r_ϵ other than those specified in 4.2.3, dimensions l_1 and f shall be corrected by using the values x and y (see figures 2, 3 and 4), which are the distances from the specified point K, as defined in 4.2.2, to the theoretical corner T.

The new dimensions l_1 and f are found from the differences between x and y corresponding to the corner radius according to 4.2.3 and x and y corresponding to the real corner radius.

5 Preferred cartridges styles

5.1 Cartridge styles established by this International Standard are the styles shown in figures 5 to 16. In these figures, right-hand cartridges are shown : left-hand ones are symmetrical in their layout.

5.2 The length adjusting screw, as well as a transverse adjusting screw are at the manufacturer's option; however dimensions f and l_1 given in clause 6 must be maintained.

5.3 Cartridges are classified into four families in respect of working major direction and the corner defined. This allows interchangeability of cartridges within a family.

FAMILY 1

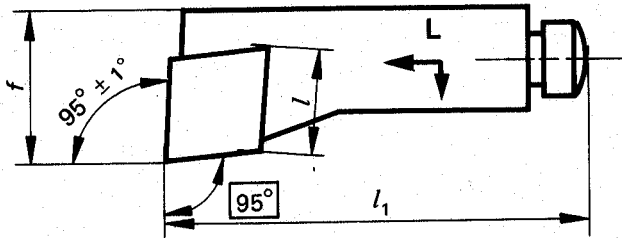


Figure 5

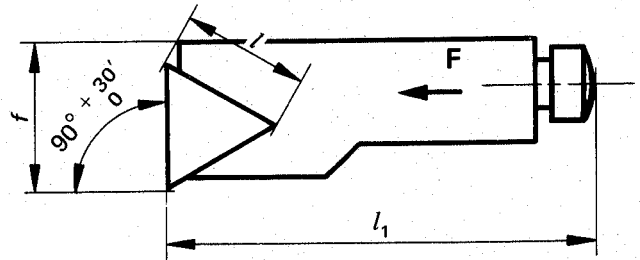


Figure 6

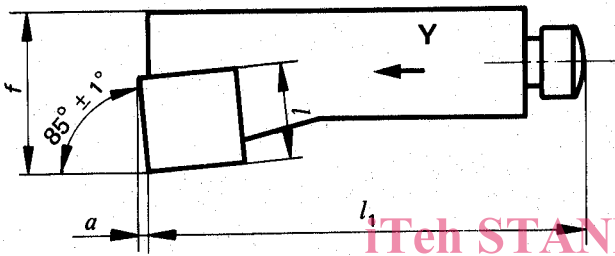


Figure 7

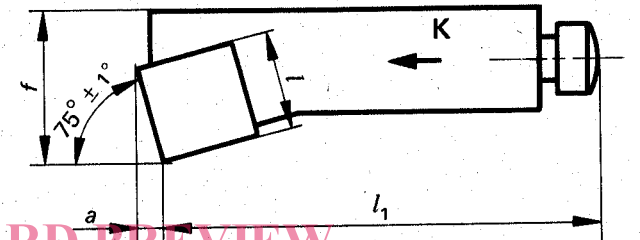


Figure 8

ITeH STANDARD PREVIEW
(standards.iteh.ai)

ISO 5611:1981

<https://standards.iteh.org/catalog/standards/sist/6708d0bf-de19-4952-9705-38582161dac7/iso-5611-1981>

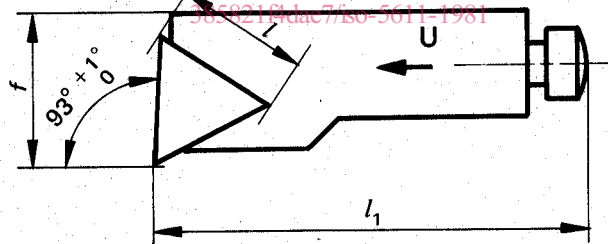


Figure 9

FAMILY 2

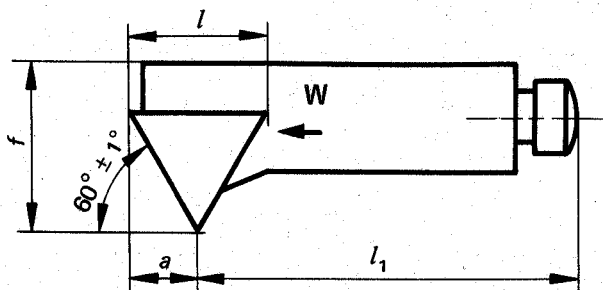


Figure 10

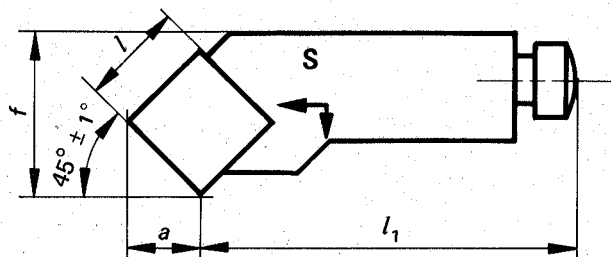


Figure 11

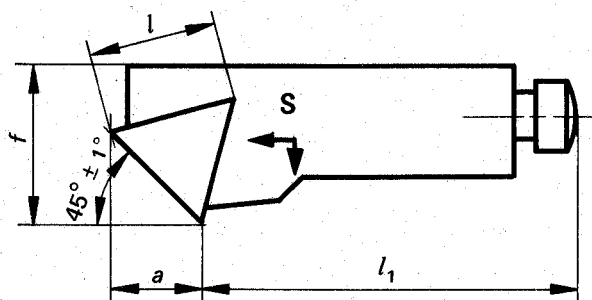


Figure 12

iTeh STANDARD PREVIEW
(standards.itteh.ai)

FAMILY 3

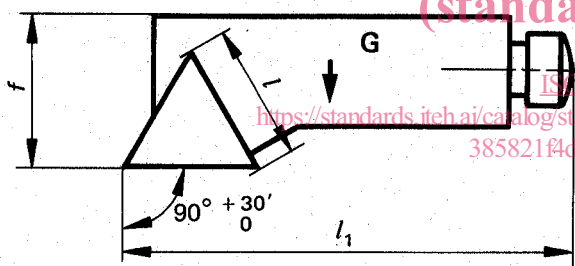


Figure 13

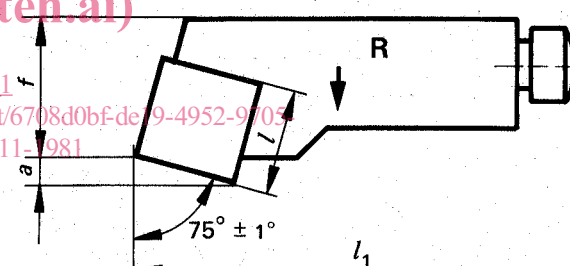


Figure 14

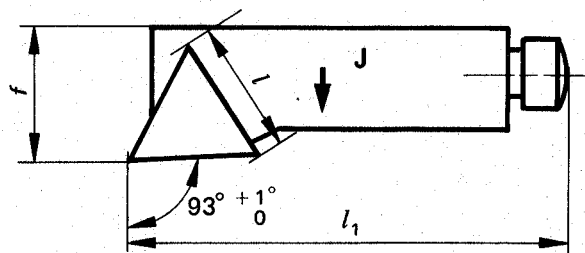


Figure 15

FAMILY 4

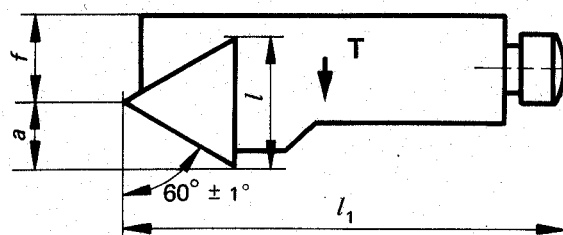


Figure 16

6 General dimensions (see figures 1 and 5 to 16)

Dimensions in millimetres

h_1 $\pm 0,08$	Insert size / (designation)			$f_{-0,08}^0$ for cartridge style		l_1 for cartridge style		D_{\min} (Diameter of minimum bore)
	Insert shape							
	T \triangle F, G, J S, T, U, W	S \square for cartridge style K, R S, Y	C ∇ L	F, G, J, K L, R, S, U, W, Y	T	F, G, J, K, L, R, T, U, Y	W, S	
10	11	09	09	14	9	50	44	40
12	11	09	09	20	13	55	47	50
	16	12	12					
16	16	12	12	25	15	63	53	60
	22	15						
20	22	15	12	25	15	70	60	70
			16					
25	27	19	19	32	20	100	87	100

Dimensions in millimetres

h_1	Dimension a (figures 7, 8, 10, 11, 12, 14, 16) for cartridge style				
	K, R	S with insert shape T \triangle	S with insert shape S \square	T, W	Y
10	2,2	7,0	6,1	5,0	0,8
12	2,2	7,0	6,1	5,0	0,8
	3,1	10,2	8,3	7,2	1,0
16	3,1	10,2	8,3	7,2	1,0
	3,8	14,1	10,2	10,0	1,3
20	3,8	14,1	10,2	10,0	1,3
25	4,6	17,2	12,5	12,2	1,6