



Designation: E2810 – 23

# Standard Practice for Demonstrating Capability to Comply with the Test for Uniformity of Dosage Units<sup>1</sup>

This standard is issued under the fixed designation E2810; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

## 1. Scope

1.1 This practice provides a general procedure for evaluating the capability to comply with the Uniformity of Dosage Units (UDU) test. This test is given in General Chapter <905> Uniformity of Dosage Units of the USP, in 2.9.40 Uniformity of Dosage Units of the Ph. Eur., and in 6.02 Uniformity of Dosage Units of the JP, and these versions are virtually interchangeable. For this multiple-stage test, the procedure computes a lower bound on the probability of passing the UDU test, based on statistical estimates made at a prescribed confidence level from a sample of dosage units.

1.2 This methodology can be used to generate an acceptance limit table, which defines a set of sample means and standard deviations that assures passing the UDU test for a prescribed lower probability bound, confidence level, and sample size.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

## 2. Referenced Documents

2.1 *ASTM Standards:*<sup>2</sup>

**E2363 Terminology Relating to Manufacturing of Pharmaceutical and Biopharmaceutical Products in the Pharmaceutical and Biopharmaceutical Industry**

<sup>1</sup> This practice is under the jurisdiction of ASTM Committee E55 on Manufacture of Pharmaceutical and Biopharmaceutical Products and is the direct responsibility of Subcommittee E55.14 on Measurement Systems and Analysis.

Current edition approved Dec. 1, 2023. Published December 2023. Originally approved in 2011. Last previous edition approved in 2019 as E2810 – 19. DOI: 10.1520/E2810-23.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, [www.astm.org](http://www.astm.org), or contact ASTM Customer Service at [service@astm.org](mailto:service@astm.org). For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

**E2709 Practice for Demonstrating Capability to Comply with an Acceptance Procedure**

2.2 *Other Documents:*

**JP Japanese Pharmacopoeia**<sup>3</sup>

**Ph. Eur. European Pharmacopoeia**<sup>4</sup>

**USP United States Pharmacopoeia**<sup>5</sup>

## 3. Terminology

3.1 *Definitions*—See Terminology **E2363** for a more extensive listing of terms in ASTM Committee E55 standards.

3.2 *Definitions of Terms Specific to This Standard:*

3.2.1 *acceptable parameter region, n*—the set of values of parameters characterizing the distribution of test results for which the probability of passing the lot acceptance procedure is greater than a prescribed lower bound.

3.2.2 *acceptance limit, n*—the boundary of the acceptance region, for example, the maximum sample standard deviation for a given sample mean or minimum and maximum sample mean for given standard deviations.

3.2.2.1 *Discussion*—The coefficient of variation (relative standard deviation) may be substituted for the standard deviation where applicable.

3.2.3 *acceptance region, n*—the set of values of parameter estimates (that is, sample mean and standard deviation) where confidence limits attain a prescribed lower bound on the probability of passing a lot acceptance procedure.

3.2.4 *confidence level, C, n*—the prescribed overall level for calculating the uncertainty region of the parameters from the sample estimates.

3.2.4.1 *Discussion*—The preset confidence level is stated as a percentage, for example,  $100(1 - \alpha) = 95\%$ , where  $\alpha$  is a risk that is allocated to the two parameters being estimated.

<sup>3</sup> Available from the Pharmaceuticals and Medical Devices Agency (PMDA), Shin-Kasumigaseki Building, 3-3-2 Kasumigaseki, Chiyoda-ku, Tokyo 100-0013, Japan, <https://www.pmda.go.jp>.

<sup>4</sup> Available from the European Directorate for the Quality of Medicines and Health Care (EDQM), Council of Europe, 7 allée Kastner, CS 30026, F-67081 Strasbourg, France, <http://www.edqm.eu>.

<sup>5</sup> Available from U.S. Pharmacopeial Convention (USP), 12601 Twinbrook Pkwy., Rockville, MD 20852-1790, <http://www.usp.org>.

3.2.5 *lower probability bound, LB, n*—the nominal probability of passing the UDU test for a given set of parameter estimates.

3.2.6 *multiple-stage acceptance procedure, n*—a procedure that involves more than one stage of sampling and testing a given quality characteristic with one or more acceptance criteria per stage.

3.2.7 *representative sample, n*—a sample that consists of a number of units that are drawn based on rational criteria such as random, stratified, or systematic sampling and intended to assure that the sample accurately portrays the material being sampled.

3.2.8 *sampling plan, n*—scheme for selecting dosage units from locations within a batch for testing purposes.

3.2.8.1 *Discussion*—In this standard, either a single dosage unit is selected from each batch location (called Sampling Plan 1) or an equal but greater than one dosage unit is selected from each batch location (called Sampling Plan 2).

3.2.9 *uniformity of dosage units, UDU, n*—the degree of uniformity in the amount of the drug substance among dosage units.

3.2.9.1 *Discussion*—The requirements of the UDU test apply to each drug substance in dosage units containing one or more drug substances, unless otherwise specified. The uniformity improves as the variability decreases.

4. Significance and Use

4.1 The methodology was originally developed (1-4)<sup>6</sup> for use in drug content uniformity and dissolution but has general application to any multistage test with multiple acceptance criteria. Practice E2709 summarizes the statistical aspects of this methodology. This practice applies the general methodology of Practice E2709 specifically to the UDU test.

4.1.1 While other methods can be used to estimate the probability of passing the UDU test, they are outside the scope of this practice.

4.2 The UDU test procedure describes a two-stage sampling test, where at each stage one can pass or continue testing, and the decision to fail is deferred until the second stage. At each stage there are acceptance criteria on the test results as outlined in Table 1.

4.3 The UDU test is a market standard. The USP General Notices include the following statement about compendial standards. “The similarity to statistical procedures may seem to suggest an intent to make inference to some larger group of units, but in all cases, statements about whether the compendial standard is met apply only to the units tested.” Therefore, the

<sup>6</sup> The boldface numbers in parentheses refer to a list of references at the end of this standard.

TABLE 1 Uniformity of Dosage Units Test Procedure

NOTE 1—All measurements of dosage units and criteria values are in percentage label claim (%LC). At each stage calculate the sample average,  $\bar{X}$ , and the sample standard deviation,  $s$ .

Stage	Number Tested	Pass Stage If:
S <sub>1</sub>	10	$ M - \bar{X}  + 2.4 s \leq 15.0$ , where $M$ is defined below.
S <sub>2</sub>	20	(1) $ M - \bar{X}  + 2.0 s \leq 15.0$ , using all 30 results (S <sub>1</sub> + S <sub>2</sub> ). (2) No dosage unit is outside the maximum allowed range of 0.75 * $M$ to 1.25 * $M$ .

$M$  is defined as follows:

- If  $T$  is less than or equal to 101.5 %LC, and
  - (1) If  $\bar{X}$  is less than 98.5 %LC, then  $M = 98.5$  %LC.
  - (2) If  $\bar{X}$  is between 98.5 and 101.5 %LC, then  $M = \bar{X}$ .
  - (3) If  $\bar{X}$  is greater than 101.5 %LC, then  $M = 101.5$  %LC.

- If  $T$  is greater than 101.5 %LC, and
  - (1) If  $\bar{X}$  is less than 98.5 %LC, then  $M = 98.5$  %LC.
  - (2) If  $\bar{X}$  is between 98.5 and  $T$ , then  $M = \bar{X}$ .
  - (3) If  $\bar{X}$  is greater than  $T$ , then  $M = T$ .

$T$  is the target content per dosage unit at the time of manufacture, expressed as %LC. Unless otherwise specified in the individual monograph,  $T$  is 100.0 %LC.

UDU procedure is not intended for inspecting uniformity of finished product for lot/batch release or as a lot inspection procedure.

4.3.1 The UDU test defines a product requirement to be met at release and throughout the shelf-life of the product.

4.3.2 Passing the UDU test once does not provide statistical assurance that a batch of drug product meets specified statistical quality control criteria.

4.4 This practice provides a practical specification that may be applied when uniformity of dosage units is required. An acceptance region for the mean and standard deviation of a set of test results from the lot is defined such that, at a prescribed confidence level, the probability that a future sample from the lot will pass the UDU test is greater than or equal to a prespecified lower probability bound. Having test results fall in the acceptance region provides assurance that a sample would pass the UDU test with at least the specified lower bound probability. This procedure does not account for any decrease in potency during the shelf life, which could affect the ability to meet the UDU test requirements.

4.5 This practice can be used as an element for process demonstration or validation, continuous process verification, in-process testing, or lot release (acceptance). As the circumstances and available information vary in these different application areas, this practice does not prescribe a specific target, sample size, lower probability bound, or confidence level. These must be prospectively selected by the user and may be different from those used in the acceptance limit tables provided in this practice.

## 5. Procedure

### 5.1 Generating The Acceptance Limit Table:

5.1.1 The general procedure that generates the acceptance limit tables is described in Practice E2709 and the specific procedure for application to the UDU test is described in the

literature (4). A simplified description on the construction and use of these tables is given in this section. A computer program is required to generate the tables given a target  $T$  as a percentage of label claim (LC), a lower probability bound  $LB$ , a confidence level  $C$ , and a sample size  $n$ .

5.1.2 The first step is to determine the acceptable parameter region. On a two-dimensional content space consisting of the true mean ( $\mu$ ) on the horizontal axis and standard deviation ( $\sigma$ ) on the vertical axis the upper 95 %  $LB$  boundary of this region is defined by a contour, a curve that is concave downward and depicted by the solid curve in Fig. 1. The simulated 95 % boundary for the actual probability of passing the USP UDU test is defined by the dashed contour that shows the effect of generating a lower bound. The  $LB$  contour is determined by the  $LB$  probability (95 %) and the target under the assumption that the dosage unit content is normally distributed. The acceptable parameter region is the set of points on or below the contour. Any ( $\mu, \sigma$ ) pair in the acceptable region would pass the UDU test with a probability of at least the  $LB$ .

5.1.3 The second step is to generate the *acceptance limit curve* that defines the acceptance region.

### SAMPLING PLAN 1

5.1.4 As described in Practice E2709, the sample mean ( $\bar{X}$ ) and sample standard deviation ( $s$ ) estimate the population parameters  $\mu$  and  $\sigma$  within  $C$  % confidence limits as chosen by the user. The joint confidence region for  $\mu$  and  $\sigma$  (5) has the shape of an inverted triangle around a ( $\bar{X}, s$ ) pair as depicted in Fig. 2 with the lowest vertex at ( $\bar{X}, 0$ ).

5.1.4.1 To create an acceptance region, a value of  $\bar{X}$  is selected starting with  $s = 0$ , then the confidence region is expanded by increasing  $s$  until one of the upper vertices just touches the *acceptable parameter region*. The size of the confidence region is determined by  $C$  and  $n$ . This value of  $s$  defines a point on the acceptance limit curve at ( $\bar{X}, s$ ). Additional selections of  $\bar{X}$  then generate the *acceptance limit*


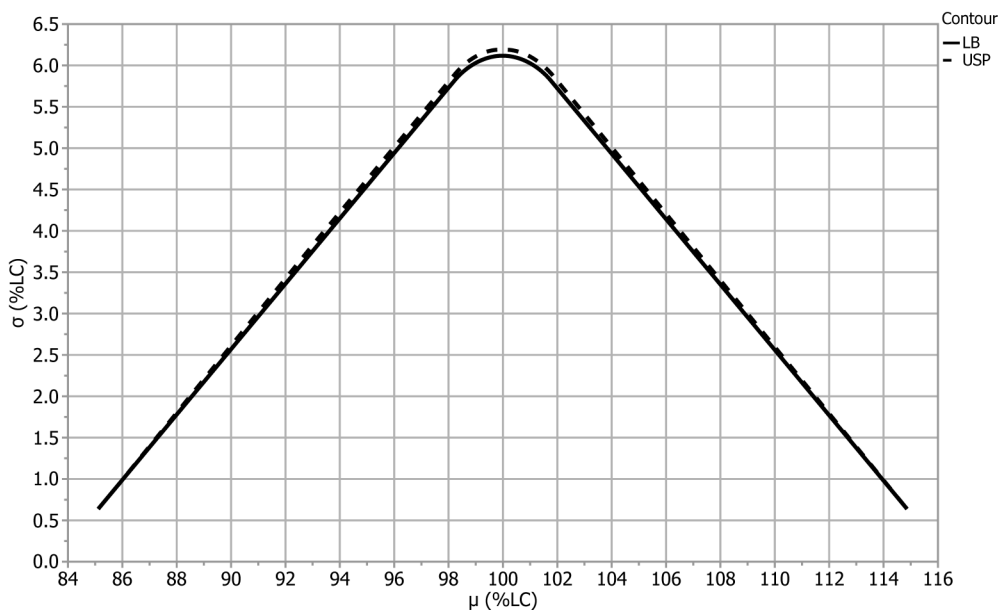


FIG. 1 Example of 95 % Lower Bound and Simulated Probabilities of Passing USP UDU <905>

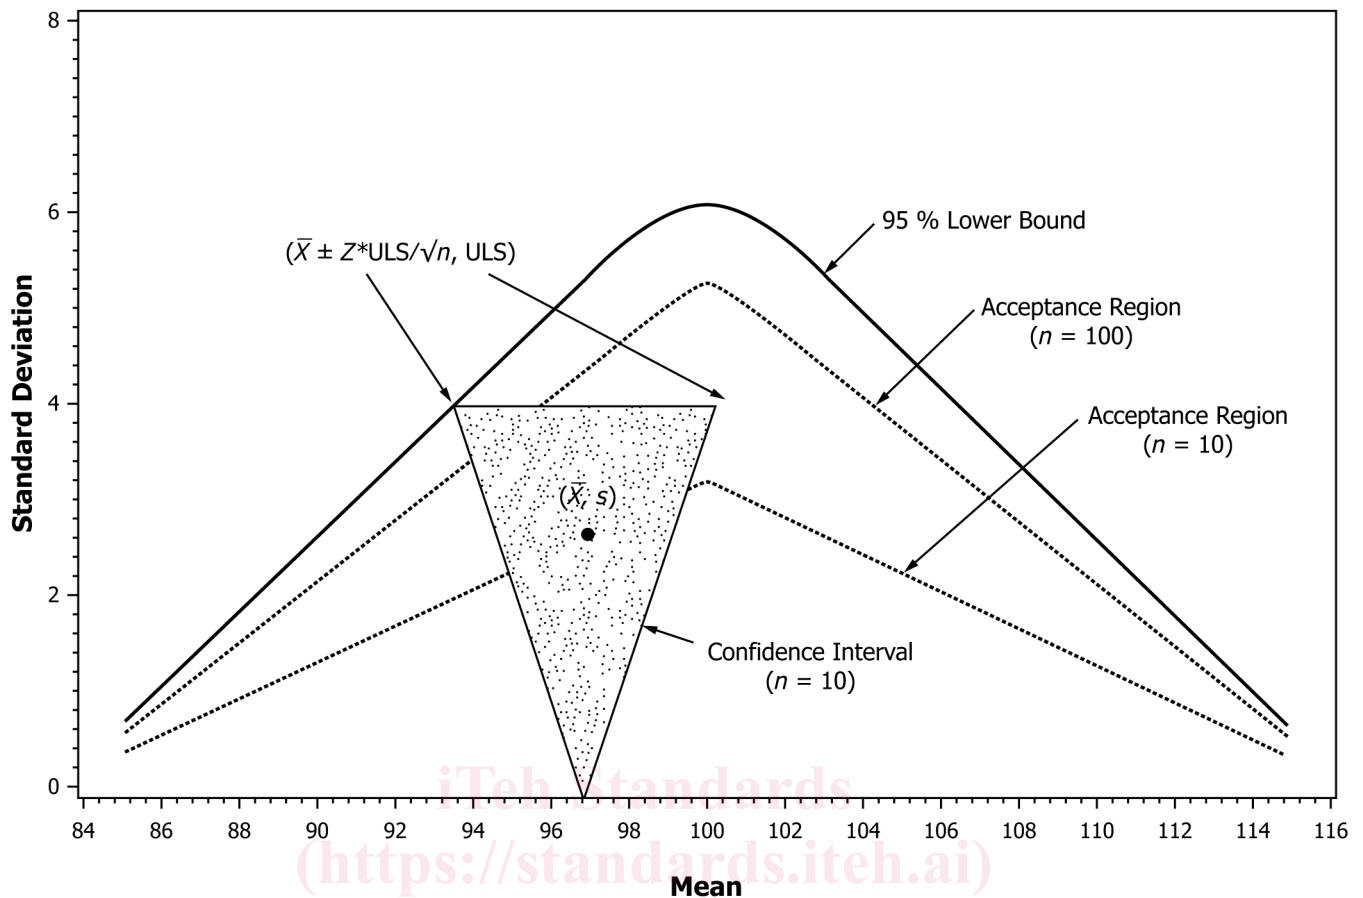

NOTE 1—All points below the lower bound contour have higher than a 95 % chance of passing UDU test if mean and standard deviation are known. All points below the acceptance region contours pass the associated acceptance limit table for  $n = 100$  and  $n = 10$ . ULS is the upper confidence limit for  $\sigma$ . Z is a standard normal critical value.

FIG. 2 Example of Simultaneous Confidence Interval with 95 % Lower Bound and Acceptance Regions

<https://standards.iteh.ai/catalog/standards/astm/182f9589-320c-475c-b438-25139dcd376c/astm-e2810-23>

curve, as depicted as dotted lines in Fig. 2. Acceptance limit curves are shown for  $n = 10$  and  $n = 100$ , illustrating that the acceptance limits approach the acceptable parameter region with increasing sample size.

5.1.5 Computer programs have been developed for generating acceptance limit tables, but these may not be available to all practitioners. This practice contains four acceptance limit tables for many practical use situations.

5.1.6 *Using the Acceptance Limit Tables in This Practice*—Various acceptance limit tables are given in Tables 2-5. In each table acceptance limits on the standard deviation are given for means ranging 90 % to 110 % of LC in increments of 0.2 %LC for sample sizes ranging from  $n = 10$  to  $n = 500$ . In all tables, the target is set at  $T = 100$  %LC, so the acceptance limits for standard deviations are symmetrical around 100 %LC. This target is also required for interchangeability across the ICH regions (6). At the confidence level of  $C = 95$  % used often in the regulatory arena, three levels of the probability lower bound are provided:  $LB = 90$  % (Table 2),  $LB = 95$  % (Table 3) and  $LB = 99$  % (Table 4). These provide 90 %, 95 %, and 99 % coverage, respectively, of the population of dosage units under consideration. The usual coverage is 95 %.

5.1.6.1 Table 5 is provided at  $C = 90$  % and  $LB = 95$  % for comparison with Table 3 to demonstrate the effect of a lower confidence level.

NOTE 1—Tables can also be generated for other choices for ranges of means, such as 85.1 to 114.9 %LC, or for other sample sizes.

5.1.7 A representative sample of  $n$  dosage units is taken from the batch and the active content is measured on each unit, taken as a random sample or as a systematic sample (selecting and testing one unit at equally spaced time intervals of manufacture across the batch). Other sampling plans are outside the scope of this practice.

5.1.8 The sample average ( $\bar{X}$ ) and sample standard deviation ( $s$ ) are calculated. Enter the table row with the sample average and the table column with the sample size to find the acceptance limit on the standard deviation. If the sample standard deviation is at or below the acceptance limit then it can be asserted at the  $C$  % confidence level that the batch will have an  $LB$  % chance of passing the UDU test. Some interpolation may be required for sample sizes and sample means not listed in the table.

TABLE 2 Acceptance Limits on Sample Standard Deviation (%LC) for  
 T = 100 %LC, C = 95 %, LB = 90 %LC

Sample Average (%LC)	Sample Size (n)										
	10	30	40	50	60	80	100	120	150	200	500
100.0	2.91	4.36	4.65	4.84	4.99	5.19	5.33	5.43	5.54	5.66	5.93
99.8 or 100.2	2.88	4.31	4.59	4.79	4.94	5.14	5.28	5.38	5.50	5.62	5.91
99.6 or 100.4	2.84	4.26	4.54	4.74	4.89	5.09	5.24	5.34	5.45	5.58	5.88
99.4 or 100.6	2.81	4.21	4.49	4.69	4.83	5.04	5.18	5.29	5.40	5.53	5.84
99.2 or 100.8	2.77	4.16	4.43	4.63	4.77	4.98	5.13	5.23	5.35	5.48	5.79
99.0 or 101.0	2.74	4.10	4.38	4.57	4.72	4.92	5.07	5.17	5.29	5.43	5.74
98.8 or 101.2	2.70	4.05	4.32	4.52	4.66	4.86	5.01	5.11	5.23	5.37	5.69
98.6 or 101.4	2.67	4.00	4.27	4.46	4.60	4.80	4.94	5.05	5.17	5.30	5.63
98.4 or 101.6	2.63	3.95	4.21	4.40	4.54	4.74	4.88	4.99	5.10	5.24	5.56
98.2 or 101.8	2.60	3.89	4.16	4.34	4.48	4.68	4.82	4.92	5.04	5.17	5.49
98.0 or 102.0	2.56	3.84	4.10	4.28	4.42	4.62	4.75	4.86	4.97	5.10	5.43
97.8 or 102.2	2.53	3.79	4.05	4.22	4.36	4.55	4.69	4.79	4.90	5.03	5.35
97.6 or 102.4	2.49	3.74	3.99	4.17	4.30	4.49	4.62	4.72	4.84	4.97	5.28
97.4 or 102.6	2.46	3.68	3.93	4.11	4.24	4.43	4.56	4.66	4.77	4.90	5.21
97.2 or 102.8	2.42	3.63	3.88	4.05	4.18	4.36	4.50	4.59	4.70	4.83	5.13
97.0 or 103.0	2.39	3.58	3.82	3.99	4.12	4.30	4.43	4.53	4.63	4.76	5.06
96.8 or 103.2	2.35	3.53	3.77	3.93	4.06	4.24	4.37	4.46	4.56	4.69	4.99
96.6 or 103.4	2.32	3.48	3.71	3.87	4.00	4.18	4.30	4.39	4.50	4.62	4.91
96.4 or 103.6	2.28	3.42	3.65	3.81	3.94	4.11	4.23	4.33	4.43	4.55	4.84
96.2 or 103.8	2.24	3.37	3.60	3.76	3.88	4.05	4.17	4.26	4.36	4.48	4.77
96.0 or 104.0	2.21	3.32	3.54	3.70	3.82	3.99	4.10	4.19	4.29	4.41	4.69
95.8 or 104.2	2.17	3.26	3.48	3.64	3.76	3.92	4.04	4.13	4.23	4.34	4.62
95.6 or 104.4	2.14	3.21	3.43	3.58	3.70	3.86	3.98	4.06	4.16	4.27	4.54
95.4 or 104.6	2.10	3.16	3.37	3.52	3.63	3.80	3.91	3.99	4.09	4.20	4.47
95.2 or 104.8	2.07	3.11	3.31	3.46	3.57	3.73	3.84	3.93	4.02	4.13	4.39
95.0 or 105.0	2.03	3.05	3.26	3.40	3.51	3.67	3.78	3.86	3.95	4.06	4.32
94.8 or 105.2	2.00	3.00	3.20	3.35	3.45	3.61	3.71	3.79	3.88	3.99	4.24
94.6 or 105.4	1.96	2.95	3.15	3.29	3.39	3.54	3.65	3.73	3.82	3.92	4.17
94.4 or 105.6	1.93	2.89	3.09	3.23	3.33	3.48	3.58	3.66	3.75	3.85	4.10
94.2 or 105.8	1.89	2.84	3.03	3.17	3.27	3.42	3.52	3.59	3.68	3.78	4.02
94.0 or 106.0	1.86	2.79	2.98	3.11	3.21	3.35	3.45	3.53	3.61	3.71	3.95
93.8 or 106.2	1.82	2.74	2.92	3.05	3.15	3.29	3.39	3.46	3.54	3.64	3.87
93.6 or 106.4	1.79	2.68	2.86	2.99	3.09	3.23	3.32	3.39	3.47	3.57	3.80
93.4 or 106.6	1.75	2.63	2.81	2.93	3.03	3.16	3.25	3.33	3.40	3.50	3.72
93.2 or 106.8	1.72	2.58	2.75	2.87	2.97	3.10	3.19	3.26	3.34	3.43	3.65
93.0 or 107.0	1.68	2.52	2.69	2.81	2.90	3.03	3.12	3.19	3.27	3.36	3.57
92.8 or 107.2	1.65	2.47	2.64	2.75	2.84	2.97	3.06	3.13	3.20	3.28	3.50
92.6 or 107.4	1.61	2.42	2.58	2.70	2.78	2.91	2.99	3.06	3.13	3.21	3.42
92.4 or 107.6	1.57	2.36	2.52	2.64	2.72	2.84	2.93	2.99	3.06	3.14	3.35
92.2 or 107.8	1.54	2.31	2.47	2.58	2.66	2.78	2.86	2.92	2.99	3.07	3.27
92.0 or 108.0	1.50	2.26	2.41	2.52	2.60	2.71	2.80	2.86	2.92	3.00	3.20
91.8 or 108.2	1.47	2.20	2.35	2.46	2.54	2.65	2.73	2.79	2.86	2.93	3.12
91.6 or 108.4	1.43	2.15	2.30	2.40	2.48	2.59	2.66	2.72	2.79	2.86	3.05
91.4 or 108.6	1.40	2.10	2.24	2.34	2.42	2.52	2.60	2.65	2.72	2.79	2.97
91.2 or 108.8	1.36	2.04	2.18	2.28	2.35	2.46	2.53	2.59	2.65	2.72	2.89
91.0 or 109.0	1.33	1.99	2.13	2.22	2.29	2.39	2.47	2.52	2.58	2.65	2.82
90.8 or 109.2	1.29	1.94	2.07	2.16	2.23	2.33	2.40	2.45	2.51	2.58	2.74
90.6 or 109.4	1.26	1.89	2.01	2.10	2.17	2.27	2.33	2.39	2.44	2.51	2.67
90.4 or 109.6	1.22	1.83	1.96	2.04	2.11	2.20	2.27	2.32	2.37	2.44	2.59
90.2 or 109.8	1.19	1.78	1.90	1.98	2.05	2.14	2.20	2.25	2.30	2.37	2.52
90.0 or 110.0	1.15	1.73	1.84	1.93	1.99	2.08	2.14	2.18	2.24	2.30	2.44

5.1.8.1 Example 1—A sample of  $n = 60$  dosage units provided dosage content statistics of  $\bar{X} = 98.6$  %LC and  $s = 3.91$  %LC. Since  $s$  was below the upper limit of 4.41 %LC (using Table 3), we can state with 95 % confidence there is at least a 95 % probability that a future sample taken from the batch will meet the UDU test.

5.1.8.2 Example 2—A sample of  $n = 70$  dosage units provided dosage content statistics of  $\bar{X} = 97.8$  %LC and  $s = 4.29$  %LC. Since  $n =$  was not provided in the Table 3, we must interpolate between entry  $n = 60$  with the upper limit 4.18 %LC and entry  $n = 80$  with the upper limit 4.36 %LC as follows:

$$\begin{aligned} \text{Acceptance limit} &= 4.18 + [(4.36 - 4.18) (70 - 60) / (80 - 60)] \\ &= 4.18 + [(0.18)(10) / (20)] = 4.27\%LC \end{aligned}$$

Since  $s = 4.29$  %LC was above the upper limit of 4.27 %LC, we cannot state with 95 % confidence there is at least a 95 % probability that a future sample taken from the batch will meet the UDU test.

5.1.8.3 Example 3—A sample of  $n = 60$  dosage units provided dosage content statistics of  $\bar{X} = 98.6$  %LC and  $s = 3.91$  %LC at time of manufacture. At the end of shelf life the dosage units are predicted to have lost potency such that the effective  $\bar{X} = 96.2$  %LC. Since  $s = 3.91$  %LC was above the



TABLE 3 Acceptance Limits on Sample Standard Deviation (%LC) for  
 T = 100 %LC, C = 95 %, LB = 95 %LC

Sample Average (%LC)	Sample Size (n)										
	10	30	40	50	60	80	100	120	150	200	500
100.0	2.81	4.18	4.46	4.64	4.78	4.98	5.11	5.21	5.31	5.43	5.69
99.8 or 100.2	2.77	4.13	4.41	4.59	4.73	4.93	5.07	5.16	5.27	5.39	5.67
99.6 or 100.4	2.74	4.08	4.35	4.54	4.68	4.88	5.02	5.12	5.23	5.35	5.64
99.4 or 100.6	2.70	4.04	4.30	4.49	4.63	4.83	4.96	5.07	5.18	5.30	5.60
99.2 or 100.8	2.67	3.99	4.26	4.43	4.57	4.77	4.91	5.01	5.12	5.25	5.55
99.0 or 101.0	2.64	3.94	4.20	4.39	4.51	4.71	4.85	4.95	5.07	5.20	5.49
98.8 or 101.2	2.60	3.88	4.15	4.33	4.47	4.65	4.79	4.89	5.01	5.14	5.44
98.6 or 101.4	2.57	3.84	4.09	4.27	4.41	4.59	4.73	4.83	4.94	5.07	5.38
98.4 or 101.6	2.54	3.79	4.03	4.21	4.35	4.54	4.67	4.77	4.88	5.01	5.31
98.2 or 101.8	2.50	3.74	3.99	4.16	4.29	4.48	4.61	4.70	4.82	4.94	5.25
98.0 or 102.0	2.47	3.68	3.93	4.11	4.23	4.42	4.55	4.65	4.75	4.88	5.18
97.8 or 102.2	2.43	3.64	3.88	4.05	4.18	4.36	4.49	4.58	4.68	4.81	5.11
97.6 or 102.4	2.40	3.58	3.83	3.99	4.12	4.29	4.42	4.52	4.63	4.74	5.05
97.4 or 102.6	2.37	3.54	3.77	3.93	4.06	4.24	4.36	4.45	4.56	4.68	4.97
97.2 or 102.8	2.33	3.49	3.71	3.88	4.00	4.18	4.30	4.39	4.49	4.62	4.90
97.0 or 103.0	2.30	3.43	3.67	3.82	3.95	4.11	4.24	4.33	4.43	4.55	4.83
96.8 or 103.2	2.26	3.39	3.61	3.77	3.88	4.06	4.17	4.27	4.37	4.48	4.76
96.6 or 103.4	2.23	3.33	3.55	3.71	3.83	4.00	4.12	4.20	4.30	4.41	4.69
96.4 or 103.6	2.20	3.29	3.50	3.65	3.77	3.93	4.05	4.14	4.23	4.35	4.62
96.2 or 103.8	2.16	3.23	3.44	3.60	3.71	3.88	3.99	4.07	4.17	4.28	4.55
96.0 or 104.0	2.13	3.18	3.40	3.54	3.66	3.81	3.93	4.01	4.10	4.21	4.47
95.8 or 104.2	2.09	3.13	3.34	3.49	3.59	3.76	3.86	3.95	4.04	4.15	4.41
95.6 or 104.4	2.06	3.08	3.29	3.43	3.54	3.69	3.80	3.88	3.98	4.08	4.34
95.4 or 104.6	2.03	3.03	3.23	3.38	3.48	3.63	3.74	3.82	3.91	4.02	4.26
95.2 or 104.8	1.99	2.98	3.18	3.31	3.42	3.57	3.67	3.75	3.85	3.94	4.19
95.0 or 105.0	1.96	2.93	3.13	3.26	3.36	3.52	3.61	3.70	3.78	3.88	4.12
94.8 or 105.2	1.92	2.87	3.07	3.20	3.31	3.45	3.56	3.63	3.72	3.81	4.05
94.6 or 105.4	1.89	2.83	3.02	3.15	3.24	3.39	3.49	3.57	3.65	3.75	3.98
94.4 or 105.6	1.86	2.78	2.96	3.09	3.19	3.33	3.43	3.50	3.58	3.68	3.91
94.2 or 105.8	1.82	2.72	2.91	3.03	3.13	3.27	3.36	3.44	3.51	3.61	3.83
94.0 or 106.0	1.79	2.67	2.85	2.98	3.07	3.21	3.30	3.37	3.45	3.54	3.77
93.8 or 106.2	1.75	2.63	2.80	2.92	3.01	3.14	3.24	3.31	3.39	3.47	3.70
93.6 or 106.4	1.72	2.57	2.74	2.86	2.96	3.09	3.17	3.25	3.32	3.41	3.62
93.4 or 106.6	1.69	2.52	2.69	2.81	2.90	3.03	3.11	3.18	3.25	3.34	3.55
93.2 or 106.8	1.65	2.47	2.64	2.75	2.84	2.96	3.05	3.11	3.19	3.27	3.48
93.0 or 107.0	1.62	2.42	2.59	2.70	2.78	2.90	2.99	3.05	3.12	3.21	3.40
92.8 or 107.2	1.58	2.37	2.52	2.64	2.72	2.84	2.92	2.99	3.05	3.14	3.33
92.6 or 107.4	1.55	2.32	2.47	2.58	2.67	2.78	2.86	2.93	2.99	3.07	3.27
92.4 or 107.6	1.52	2.26	2.42	2.52	2.61	2.72	2.80	2.86	2.93	3.00	3.20
92.2 or 107.8	1.48	2.21	2.36	2.47	2.54	2.66	2.74	2.79	2.86	2.93	3.13
92.0 or 108.0	1.45	2.16	2.31	2.41	2.48	2.59	2.68	2.73	2.80	2.87	3.05
91.8 or 108.2	1.41	2.11	2.26	2.35	2.43	2.53	2.61	2.66	2.73	2.80	2.97
91.6 or 108.4	1.38	2.06	2.20	2.30	2.37	2.47	2.55	2.60	2.67	2.73	2.90
91.4 or 108.6	1.35	2.01	2.15	2.24	2.31	2.41	2.49	2.54	2.60	2.67	2.83
91.2 or 108.8	1.31	1.96	2.09	2.18	2.25	2.35	2.43	2.47	2.54	2.60	2.76
91.0 or 109.0	1.28	1.91	2.04	2.13	2.19	2.29	2.36	2.41	2.47	2.53	2.69
90.8 or 109.2	1.24	1.86	1.98	2.07	2.13	2.23	2.30	2.34	2.40	2.46	2.62
90.6 or 109.4	1.21	1.81	1.93	2.01	2.07	2.17	2.23	2.28	2.34	2.39	2.55
90.4 or 109.6	1.18	1.75	1.87	1.95	2.02	2.11	2.17	2.21	2.27	2.33	2.48
90.2 or 109.8	1.14	1.70	1.82	1.90	1.96	2.05	2.11	2.16	2.20	2.26	2.41
90.0 or 110.0	1.11	1.66	1.76	1.85	1.90	1.99	2.04	2.09	2.13	2.20	2.33

upper limit of 3.71 %LC (using Table 3), we cannot state with 95 % confidence there is at least a 95 % probability that a future sample taken from the batch will meet the UDU test throughout the shelf life.

**SAMPLING PLAN 2**

5.1.9 As described in Practice E2709, Sampling Plan 2 (two-stage sampling) divides the population into primary sampling units (locations). L locations are selected and from each of them a subsample of r items is taken for a total of N = Lxr units. The variance of a single observation, σ<sup>2</sup>, is the sum of between-location and within-location variances. σ is esti-

mated by √((1/r)\*MSB+(1 - 1/r)MSE) where MSB and MSE are the between location and within location mean square errors from the analysis of variance table. The confidence limit for σ<sup>2</sup> is determined using MSE and MSB (see Practice E2709). The joint confidence region is as in Sampling Plan 1. For fixed values of the between and within location standard deviations, the sample mean (X̄) is set at 83.5. Then the confidence region is expanded by increasing the sample mean until the left vertex just touches the acceptable parameter region. Then the sample mean is set at 116.5 and the confidence region is expanded by decreasing the sample mean until the

TABLE 4 Acceptance Limits on Sample Standard Deviation (%LC) for  
 $T = 100\%LC$ ,  $C = 95\%$ ,  $LB = 99\%LC$

Sample Average (%LC)	Sample Size (n)										
	10	30	40	50	60	80	100	120	150	200	500
100.0	2.62	3.88	4.13	4.31	4.43	4.61	4.73	4.82	4.92	5.03	5.27
99.8 or 100.2	2.59	3.84	4.09	4.26	4.39	4.57	4.69	4.78	4.88	4.99	5.25
99.6 or 100.4	2.56	3.79	4.04	4.21	4.34	4.52	4.64	4.73	4.84	4.95	5.22
99.4 or 100.6	2.53	3.75	3.99	4.16	4.29	4.47	4.59	4.68	4.78	4.90	5.17
99.2 or 100.8	2.49	3.70	3.94	4.11	4.23	4.41	4.54	4.63	4.73	4.85	5.13
99.0 or 101.0	2.46	3.65	3.89	4.06	4.18	4.36	4.48	4.57	4.68	4.79	5.07
98.8 or 101.2	2.43	3.61	3.84	4.01	4.13	4.31	4.43	4.52	4.62	4.74	5.02
98.6 or 101.4	2.40	3.56	3.79	3.95	4.08	4.25	4.37	4.46	4.56	4.68	4.96
98.4 or 101.6	2.37	3.51	3.74	3.90	4.02	4.19	4.31	4.40	4.50	4.62	4.90
98.2 or 101.8	2.34	3.47	3.69	3.85	3.97	4.14	4.26	4.34	4.44	4.56	4.83
98.0 or 102.0	2.31	3.42	3.64	3.80	3.92	4.08	4.20	4.29	4.38	4.50	4.77
97.8 or 102.2	2.27	3.37	3.59	3.75	3.86	4.03	4.14	4.23	4.32	4.44	4.70
97.6 or 102.4	2.24	3.33	3.54	3.70	3.81	3.97	4.09	4.17	4.27	4.38	4.64
97.4 or 102.6	2.21	3.28	3.49	3.64	3.76	3.92	4.03	4.11	4.21	4.31	4.58
97.2 or 102.8	2.18	3.23	3.45	3.59	3.70	3.86	3.97	4.05	4.15	4.25	4.51
97.0 or 103.0	2.15	3.19	3.40	3.54	3.65	3.81	3.91	4.00	4.09	4.19	4.45
96.8 or 103.2	2.12	3.14	3.35	3.49	3.60	3.75	3.86	3.94	4.03	4.13	4.38
96.6 or 103.4	2.08	3.09	3.30	3.44	3.54	3.69	3.80	3.88	3.97	4.07	4.32
96.4 or 103.6	2.05	3.05	3.24	3.38	3.49	3.64	3.74	3.82	3.91	4.01	4.25
96.2 or 103.8	2.02	3.00	3.20	3.33	3.43	3.58	3.68	3.76	3.85	3.95	4.19
96.0 or 104.0	1.99	2.95	3.14	3.28	3.38	3.53	3.63	3.70	3.79	3.88	4.12
95.8 or 104.2	1.96	2.91	3.10	3.23	3.33	3.47	3.57	3.64	3.73	3.82	4.06
95.6 or 104.4	1.93	2.86	3.05	3.18	3.27	3.41	3.51	3.58	3.67	3.76	3.99
95.4 or 104.6	1.89	2.81	2.99	3.12	3.22	3.36	3.45	3.52	3.61	3.70	3.92
95.2 or 104.8	1.86	2.76	2.94	3.07	3.16	3.30	3.40	3.47	3.55	3.64	3.86
95.0 or 105.0	1.83	2.72	2.89	3.02	3.11	3.25	3.34	3.41	3.48	3.58	3.79
94.8 or 105.2	1.80	2.67	2.84	2.97	3.06	3.19	3.28	3.35	3.43	3.51	3.73
94.6 or 105.4	1.77	2.62	2.79	2.91	3.00	3.13	3.22	3.29	3.36	3.45	3.66
94.4 or 105.6	1.73	2.58	2.74	2.86	2.95	3.08	3.16	3.23	3.30	3.39	3.60
94.2 or 105.8	1.70	2.53	2.69	2.81	2.90	3.02	3.11	3.17	3.24	3.33	3.53
94.0 or 106.0	1.67	2.48	2.64	2.76	2.84	2.96	3.05	3.11	3.18	3.26	3.46
93.8 or 106.2	1.64	2.43	2.59	2.70	2.79	2.91	2.99	3.05	3.12	3.20	3.40
93.6 or 106.4	1.61	2.39	2.54	2.65	2.73	2.85	2.93	2.99	3.06	3.14	3.33
93.4 or 106.6	1.58	2.34	2.49	2.60	2.68	2.79	2.87	2.93	3.00	3.08	3.27
93.2 or 106.8	1.54	2.29	2.44	2.55	2.62	2.74	2.82	2.87	2.94	3.02	3.20
93.0 or 107.0	1.51	2.24	2.39	2.49	2.57	2.68	2.76	2.82	2.88	2.95	3.14
92.8 or 107.2	1.48	2.20	2.34	2.44	2.52	2.63	2.70	2.76	2.82	2.89	3.07
92.6 or 107.4	1.45	2.15	2.29	2.39	2.46	2.57	2.64	2.70	2.76	2.83	3.00
92.4 or 107.6	1.42	2.10	2.24	2.34	2.41	2.51	2.58	2.64	2.70	2.77	2.94
92.2 or 107.8	1.38	2.06	2.19	2.28	2.36	2.46	2.53	2.58	2.64	2.71	2.87
92.0 or 108.0	1.35	2.01	2.14	2.23	2.30	2.40	2.47	2.52	2.58	2.64	2.81
91.8 or 108.2	1.32	1.96	2.09	2.18	2.25	2.34	2.41	2.46	2.52	2.58	2.74
91.6 or 108.4	1.29	1.91	2.04	2.13	2.19	2.29	2.35	2.40	2.46	2.52	2.67
91.4 or 108.6	1.26	1.87	1.99	2.07	2.14	2.23	2.29	2.34	2.39	2.46	2.61
91.2 or 108.8	1.23	1.82	1.94	2.02	2.08	2.17	2.24	2.28	2.34	2.39	2.54
91.0 or 109.0	1.19	1.77	1.89	1.97	2.03	2.12	2.18	2.22	2.27	2.33	2.48
90.8 or 109.2	1.16	1.73	1.84	1.92	1.98	2.06	2.12	2.16	2.21	2.27	2.41
90.6 or 109.4	1.13	1.68	1.79	1.86	1.92	2.00	2.06	2.11	2.15	2.21	2.34
90.4 or 109.6	1.10	1.63	1.74	1.81	1.87	1.95	2.00	2.04	2.09	2.15	2.28
90.2 or 109.8	1.07	1.58	1.69	1.76	1.81	1.89	1.95	1.99	2.03	2.08	2.21
90.0 or 110.0	1.03	1.54	1.64	1.71	1.76	1.84	1.89	1.93	1.97	2.02	2.15

right vertex just touches the acceptable parameter region. The size of the confidence region is determined by  $C$ ,  $L$ , and  $r$ .

5.1.10 Computer programs have been developed for generating acceptance limit tables, but these may not be available to all practitioners. The International Society for Pharmaceutical Engineering (ISPE) has made available information for common tables for Sampling Plans 1 and 2, a SAS program, and other useful tools.<sup>7</sup>

5.1.11 *Using the Acceptance Limit Tables in This Practice*—For a given sampling plan with  $L$  locations with  $r$  dosage units tested at each location and a specified confidence level and probability of passing the USP UDU test, the acceptance limit table provides a lower and upper range for the overall  $L \times r$  mean based on the pooled within location standard deviation (SE) and the standard deviation of the  $L$  location means (not the between location variance component). The pooled location standard deviation is the square root of the average  $L$  within location variances.

<sup>7</sup> <https://www.ispe.org/initiatives/blend-uniformity-content-uniformity/tools>.

TABLE 5 Acceptance Limits on Sample Standard Deviation (%LC) for  
 $T = 100\%LC$ ,  $C = 90\%$ ,  $LB = 95\%LC$

Sample Average (%LC)	Sample Size ( <i>n</i> )										
	10	30	40	50	60	80	100	120	150	200	500
100.0	3.21	4.47	4.71	4.88	5.00	5.16	5.27	5.35	5.44	5.54	5.76
99.8 or 100.2	3.17	4.42	4.67	4.83	4.95	5.12	5.23	5.32	5.41	5.51	5.74
99.6 or 100.4	3.13	4.37	4.61	4.78	4.90	5.07	5.19	5.27	5.36	5.47	5.71
99.4 or 100.6	3.09	4.32	4.56	4.72	4.85	5.02	5.14	5.22	5.32	5.42	5.67
99.2 or 100.8	3.06	4.27	4.50	4.67	4.79	4.96	5.08	5.17	5.26	5.37	5.63
99.0 or 101.0	3.02	4.21	4.45	4.61	4.73	4.91	5.02	5.11	5.21	5.32	5.58
98.8 or 101.2	2.98	4.16	4.39	4.55	4.67	4.84	4.96	5.05	5.15	5.26	5.52
98.6 or 101.4	2.94	4.11	4.34	4.50	4.62	4.78	4.90	4.99	5.08	5.20	5.46
98.4 or 101.6	2.90	4.05	4.28	4.44	4.55	4.72	4.84	4.93	5.02	5.13	5.40
98.2 or 101.8	2.86	4.00	4.22	4.38	4.50	4.66	4.78	4.86	4.96	5.07	5.33
98.0 or 102.0	2.82	3.95	4.17	4.32	4.44	4.60	4.71	4.80	4.89	5.00	5.26
97.8 or 102.2	2.78	3.89	4.11	4.26	4.37	4.54	4.65	4.73	4.82	4.93	5.19
97.6 or 102.4	2.75	3.84	4.05	4.20	4.31	4.47	4.58	4.67	4.76	4.86	5.12
97.4 or 102.6	2.71	3.79	4.00	4.14	4.25	4.41	4.52	4.60	4.69	4.80	5.05
97.2 or 102.8	2.67	3.73	3.94	4.08	4.19	4.35	4.45	4.53	4.63	4.73	4.98
97.0 or 103.0	2.63	3.68	3.88	4.03	4.13	4.29	4.39	4.47	4.56	4.66	4.91
96.8 or 103.2	2.59	3.62	3.82	3.97	4.07	4.22	4.33	4.40	4.49	4.59	4.84
96.6 or 103.4	2.55	3.57	3.77	3.91	4.01	4.16	4.26	4.34	4.42	4.52	4.76
96.4 or 103.6	2.51	3.52	3.71	3.85	3.95	4.10	4.20	4.27	4.36	4.46	4.69
96.2 or 103.8	2.47	3.46	3.65	3.79	3.89	4.03	4.13	4.21	4.29	4.39	4.62
96.0 or 104.0	2.43	3.41	3.60	3.73	3.83	3.97	4.07	4.14	4.22	4.32	4.55
95.8 or 104.2	2.40	3.35	3.54	3.67	3.77	3.91	4.00	4.08	4.16	4.25	4.48
95.6 or 104.4	2.36	3.30	3.48	3.61	3.71	3.84	3.94	4.01	4.09	4.18	4.40
95.4 or 104.6	2.32	3.24	3.43	3.55	3.65	3.78	3.87	3.95	4.02	4.11	4.33
95.2 or 104.8	2.28	3.19	3.37	3.49	3.58	3.72	3.81	3.88	3.96	4.04	4.26
95.0 or 105.0	2.24	3.13	3.31	3.43	3.52	3.66	3.75	3.81	3.89	3.97	4.19
94.8 or 105.2	2.20	3.08	3.25	3.37	3.46	3.59	3.68	3.75	3.82	3.91	4.11
94.6 or 105.4	2.16	3.03	3.20	3.31	3.40	3.53	3.61	3.68	3.75	3.84	4.04
94.4 or 105.6	2.12	2.97	3.14	3.25	3.34	3.47	3.55	3.61	3.69	3.77	3.97
94.2 or 105.8	2.09	2.92	3.08	3.20	3.28	3.40	3.49	3.55	3.62	3.70	3.90
94.0 or 106.0	2.05	2.86	3.02	3.13	3.22	3.34	3.42	3.48	3.55	3.63	3.82
93.8 or 106.2	2.01	2.81	2.97	3.08	3.16	3.27	3.36	3.42	3.48	3.56	3.75
93.6 or 106.4	1.97	2.75	2.91	3.02	3.10	3.21	3.29	3.35	3.42	3.49	3.68
93.4 or 106.6	1.93	2.70	2.85	2.96	3.04	3.15	3.23	3.28	3.35	3.42	3.61
93.2 or 106.8	1.89	2.65	2.79	2.90	2.97	3.08	3.16	3.22	3.28	3.36	3.53
93.0 or 107.0	1.85	2.59	2.74	2.84	2.91	3.02	3.10	3.15	3.21	3.29	3.46
92.8 or 107.2	1.81	2.54	2.68	2.78	2.85	2.96	3.03	3.09	3.15	3.22	3.39
92.6 or 107.4	1.77	2.48	2.62	2.72	2.79	2.89	2.96	3.02	3.08	3.15	3.32
92.4 or 107.6	1.74	2.43	2.56	2.66	2.73	2.83	2.90	2.95	3.01	3.08	3.24
92.2 or 107.8	1.70	2.37	2.51	2.60	2.67	2.77	2.84	2.89	2.94	3.01	3.17
92.0 or 108.0	1.66	2.32	2.45	2.54	2.61	2.70	2.77	2.82	2.88	2.94	3.10
91.8 or 108.2	1.62	2.26	2.39	2.48	2.55	2.64	2.71	2.75	2.81	2.87	3.02
91.6 or 108.4	1.58	2.21	2.33	2.42	2.48	2.58	2.64	2.69	2.74	2.80	2.95
91.4 or 108.6	1.54	2.16	2.27	2.36	2.42	2.51	2.58	2.62	2.67	2.73	2.88
91.2 or 108.8	1.50	2.10	2.22	2.30	2.36	2.45	2.51	2.55	2.61	2.66	2.81
91.0 or 109.0	1.46	2.05	2.16	2.24	2.30	2.39	2.44	2.49	2.54	2.60	2.73
90.8 or 109.2	1.42	1.99	2.10	2.18	2.24	2.32	2.38	2.42	2.47	2.53	2.66
90.6 or 109.4	1.38	1.94	2.04	2.12	2.18	2.26	2.31	2.36	2.40	2.46	2.59
90.4 or 109.6	1.34	1.88	1.99	2.06	2.12	2.19	2.25	2.29	2.34	2.39	2.51
90.2 or 109.8	1.31	1.83	1.93	2.00	2.05	2.13	2.18	2.22	2.27	2.32	2.44
90.0 or 110.0	1.27	1.77	1.87	1.94	1.99	2.07	2.12	2.16	2.20	2.25	2.37

5.1.11.1 Two examples of acceptance limit tables for Sampling Plan 2 are provided below. These two sampling plans were selected based on material given in two papers (7, 8) published by an ISPE Blend Uniformity/Content Uniformity (BUCU) group that became active after the FDA withdrew a process validation guidance. ISPE has made available information regarding various activities of the group.<sup>8</sup> Table 6 and Table 7 contain information available from the ISPE.<sup>9</sup> Both

tables were created using a confidence level of  $C = 90\%$  and a  $LB = 95\%$  and assume a target value of  $100\%LC$ . Table 6 applies to a sampling plan with 20 locations with 3 results per location ( $20 \times 3$ ) and Table 7 applies to 40 locations with 3 results per location. The between location and within location standard deviations start at  $0.1\%LC$  and increment by  $0.1\%LC$  up to the maximum possible range on the overall mean.

<sup>8</sup> <https://ispe.org/search?keys=BUCU>.  
<sup>9</sup> <https://ispe.org/initiatives/blend-uniformity-content-uniformity/tools/sampling>.



**TABLE 6 Sampling Plan 2 (20 Locations: 3 Results at Each Location) Acceptance Limits on Overall Mean (%LC) for  
T = 100 %LC, C = 90 %, LB = 95 %LC**

SE (%LC)	Standard Deviation of Location Means (%LC)															
	0.1		0.2		0.3		0.4		0.5		0.6		0.7		0.8	
	LL	UL	LL	UL	LL	UL	LL	UL	LL	UL	LL	UL	LL	UL	LL	UL
0.1	84.0	116.0	84.4	115.6	84.8	115.2	85.2	114.8	85.6	114.4	86.0	114.0	86.4	113.6	86.8	113.2
0.2	84.2	115.8	84.5	115.5	84.8	115.2	85.2	114.8	85.6	114.4	86.0	114.0	86.4	113.6	86.8	113.2
0.3	84.4	115.6	84.6	115.4	84.9	115.1	85.3	114.7	85.7	114.3	86.1	113.9	86.5	113.5	86.8	113.2
0.4	84.7	115.3	84.8	115.2	85.1	114.9	85.4	114.6	85.8	114.2	86.1	113.9	86.5	113.5	86.9	113.1
0.5	84.9	115.1	85.0	115.0	85.3	114.7	85.5	114.5	85.9	114.1	86.2	113.8	86.6	113.4	87.0	113.0
0.6	85.1	114.9	85.3	114.7	85.5	114.5	85.7	114.3	86.0	114.0	86.3	113.7	86.7	113.3	87.1	112.9
0.7	85.4	114.6	85.5	114.5	85.7	114.3	85.9	114.1	86.2	113.8	86.5	113.5	86.8	113.2	87.2	112.8
0.8	85.6	114.4	85.7	114.3	85.9	114.1	86.1	113.9	86.3	113.7	86.6	113.4	86.9	113.1	87.3	112.7
0.9	85.9	114.1	86.0	114.0	86.1	113.9	86.3	113.7	86.5	113.5	86.8	113.2	87.1	112.9	87.4	112.6
1.0	86.1	113.9	86.2	113.8	86.4	113.6	86.5	113.5	86.7	113.3	87.0	113.0	87.2	112.8	87.5	112.5
1.1	86.4	113.6	86.5	113.5	86.6	113.4	86.8	113.2	86.9	113.1	87.2	112.8	87.4	112.6	87.7	112.3
1.2	86.6	113.4	86.7	113.3	86.8	113.2	87.0	113.0	87.2	112.8	87.4	112.6	87.6	112.4	87.9	112.1
1.3	86.9	113.1	87.0	113.0	87.1	112.9	87.2	112.8	87.4	112.6	87.6	112.4	87.8	112.2	88.1	111.9
1.4	87.1	112.9	87.2	112.8	87.3	112.7	87.5	112.5	87.6	112.4	87.8	112.2	88.0	112.0	88.2	111.8
1.5	87.4	112.6	87.5	112.5	87.6	112.4	87.7	112.3	87.9	112.1	88.0	112.0	88.2	111.8	88.4	111.6
1.6	87.6	112.4	87.7	112.3	87.8	112.2	87.9	112.1	88.1	111.9	88.2	111.8	88.4	111.6	88.6	111.4
1.7	87.9	112.1	88.0	112.0	88.1	111.9	88.2	111.8	88.3	111.7	88.5	111.5	88.7	111.3	88.9	111.1
1.8	88.1	111.9	88.2	111.8	88.3	111.7	88.4	111.6	88.6	111.4	88.7	111.3	88.9	111.1	89.1	110.9
1.9	88.4	111.6	88.5	111.5	88.6	111.4	88.7	111.3	88.8	111.2	88.9	111.1	89.1	110.9	89.3	110.7
2.0	88.7	111.3	88.7	111.3	88.8	111.2	88.9	111.1	89.0	111.0	89.2	110.8	89.3	110.7	89.5	110.5
2.1	88.9	111.1	89.0	111.0	89.1	110.9	89.2	110.8	89.3	110.7	89.4	110.6	89.6	110.4	89.7	110.3
2.2	89.2	110.8	89.2	110.8	89.3	110.7	89.4	110.6	89.5	110.5	89.7	110.3	89.8	110.2	90.0	110.0
2.3	89.4	110.6	89.5	110.5	89.6	110.4	89.7	110.3	89.8	110.2	89.9	110.1	90.0	110.0	90.2	109.8
2.4	89.7	110.3	89.7	110.3	89.8	110.2	89.9	110.1	90.0	110.0	90.1	109.9	90.3	109.7	90.4	109.6
2.5	89.9	110.1	90.0	110.0	90.1	109.9	90.2	109.8	90.3	109.7	90.4	109.6	90.5	109.5	90.7	109.3
2.6	90.2	109.8	90.2	109.8	90.3	109.7	90.4	109.6	90.5	109.5	90.6	109.4	90.8	109.2	90.9	109.1
2.7	90.4	109.6	90.5	109.5	90.6	109.4	90.7	109.3	90.8	109.2	90.9	109.1	91.0	109.0	91.1	108.9
2.8	90.7	109.3	90.7	109.3	90.8	109.2	90.9	109.1	91.0	109.0	91.1	108.9	91.2	108.8	91.4	108.6
2.9	90.9	109.1	91.0	109.0	91.1	108.9	91.2	108.8	91.3	108.7	91.4	108.6	91.5	108.5	91.6	108.4
3.0	91.2	108.8	91.2	108.8	91.3	108.7	91.4	108.6	91.5	108.5	91.6	108.4	91.7	108.3	91.9	108.1
3.1	91.4	108.6	91.5	108.5	91.6	108.4	91.7	108.3	91.8	108.2	91.9	108.1	92.0	108.0	92.1	107.9
3.2	91.7	108.3	91.7	108.3	91.8	108.2	91.9	108.1	92.0	108.0	92.1	107.9	92.2	107.8	92.3	107.7
3.3	91.9	108.1	92.0	108.0	92.1	107.9	92.2	107.8	92.3	107.7	92.4	107.6	92.5	107.5	92.6	107.4
3.4	92.2	107.8	92.2	107.8	92.3	107.7	92.4	107.6	92.5	107.5	92.6	107.4	92.7	107.3	92.8	107.2
3.5	92.4	107.6	92.5	107.5	92.6	107.4	92.7	107.3	92.8	107.2	92.9	107.1	93.0	107.0	93.1	106.9
3.6	92.7	107.3	92.7	107.3	92.8	107.2	92.9	107.1	93.0	107.0	93.1	106.9	93.2	106.8	93.3	106.7
3.7	92.9	107.1	93.0	107.0	93.1	106.9	93.2	106.8	93.3	106.7	93.4	106.6	93.5	106.5	93.6	106.4
3.8	93.2	106.8	93.3	106.7	93.3	106.7	93.4	106.6	93.5	106.5	93.6	106.4	93.7	106.3	93.8	106.2
3.9	93.4	106.6	93.5	106.5	93.6	106.4	93.7	106.3	93.8	106.2	93.8	106.2	94.0	106.0	94.1	105.9
4.0	93.7	106.3	93.8	106.2	93.8	106.2	93.9	106.1	94.0	106.0	94.1	105.9	94.2	105.8	94.3	105.7
4.1	93.9	106.1	94.0	106.0	94.1	105.9	94.2	105.8	94.3	105.7	94.3	105.7	94.5	105.5	94.6	105.4
4.2	94.2	105.8	94.3	105.7	94.3	105.7	94.4	105.6	94.5	105.5	94.6	105.4	94.7	105.3	94.8	105.2
4.3	94.4	105.6	94.5	105.5	94.6	105.4	94.7	105.3	94.8	105.2	94.9	105.1	95.0	105.0	95.1	104.9
4.4	94.7	105.3	94.8	105.2	94.8	105.2	94.9	105.1	95.0	105.0	95.1	104.9	95.2	104.8	95.3	104.7
4.5	95.0	105.0	95.0	105.0	95.1	104.9	95.2	104.8	95.3	104.7	95.4	104.6	95.5	104.5	95.6	104.4
4.6	95.2	104.8	95.3	104.7	95.4	104.6	95.4	104.6	95.5	104.5	95.6	104.4	95.7	104.3	95.8	104.2
4.7	95.5	104.5	95.5	104.5	95.6	104.4	95.7	104.3	95.8	104.2	95.9	104.1	96.0	104.0	96.1	103.9
4.8	95.7	104.3	95.8	104.2	95.9	104.1	95.9	104.1	96.0	104.0	96.1	103.9	96.2	103.8	96.3	103.7
4.9	96.0	104.0	96.0	104.0	96.1	103.9	96.2	103.8	96.3	103.7	96.4	103.6	96.5	103.5	96.6	103.4
5.0	96.2	103.8	96.3	103.7	96.4	103.6	96.4	103.6	96.5	103.5	96.6	103.4	96.7	103.3	96.8	103.2
5.1	96.5	103.5	96.6	103.4	96.6	103.4	96.7	103.3	96.8	103.2	96.9	103.1	97.0	103.0	97.1	102.9
5.2	96.7	103.3	96.8	103.2	96.9	103.1	97.0	103.0	97.0	103.0	97.1	102.9	97.2	102.8	97.3	102.7
5.3	97.0	103.0	97.1	102.9	97.1	102.9	97.2	102.8	97.3	102.7	97.4	102.6	97.5	102.5	97.6	102.4
5.4	97.3	102.7	97.3	102.7	97.4	102.6	97.5	102.5	97.6	102.4	97.6	102.4	97.7	102.3	97.8	102.2
5.5	97.5	102.5	97.6	102.4	97.7	102.3	97.7	102.3	97.8	102.2	97.9	102.1	98.0	102.0	98.1	101.9
5.6	97.8	102.2	97.8	102.2	97.9	102.1	98.0	102.0	98.1	101.9	98.2	101.8	98.3	101.7	98.4	101.6
5.7	98.1	101.9	98.1	101.9	98.2	101.8	98.3	101.7	98.4	101.6	98.4	101.6	98.5	101.5	98.6	101.4
5.8	98.4	101.6	98.4	101.6	98.5	101.5	98.6	101.4	98.7	101.3	98.7	101.3	98.8	101.2	98.9	101.1
5.9	98.7	101.3	98.8	101.2	98.8	101.2	98.9	101.1	99.0	101.0	99.1	100.9	99.2	100.8	99.3	100.7
6.0	99.1	100.9	99.2	100.8	99.3	100.7	99.4	100.6	99.5	100.5	99.6	100.4	99.7	100.3	99.9	100.1

TABLE 6 Continued

SE (%LC)	Standard Deviation of Location Means (%LC)															
	0.9		1.0		1.1		1.2		1.3		1.4		1.5		1.6	
	LL	UL	LL	UL	LL	UL	LL	UL	LL	UL	LL	UL	LL	UL	LL	UL
0.1	87.2	112.8	87.6	112.4	88.0	112.0	88.4	111.6	88.8	111.2	89.2	110.8	89.6	110.4	90.0	110.0
0.2	87.2	112.8	87.6	112.4	88.0	112.0	88.4	111.6	88.8	111.2	89.2	110.8	89.6	110.4	90.0	110.0
0.3	87.2	112.8	87.6	112.4	88.0	112.0	88.4	111.6	88.8	111.2	89.2	110.8	89.6	110.4	90.0	110.0
0.4	87.3	112.7	87.7	112.3	88.1	111.9	88.5	111.5	88.9	111.1	89.3	110.7	89.7	110.3	90.1	109.9
0.5	87.4	112.6	87.7	112.3	88.1	111.9	88.5	111.5	88.9	111.1	89.3	110.7	89.7	110.3	90.1	109.9
0.6	87.4	112.6	87.8	112.2	88.2	111.8	88.6	111.4	89.0	111.0	89.4	110.6	89.7	110.3	90.1	109.9
0.7	87.5	112.5	87.9	112.1	88.3	111.7	88.6	111.4	89.0	111.0	89.4	110.6	89.8	110.2	90.2	109.8
0.8	87.6	112.4	88.0	112.0	88.3	111.7	88.7	111.3	89.1	110.9	89.5	110.5	89.9	110.1	90.2	109.8
0.9	87.7	112.3	88.1	111.9	88.4	111.6	88.8	111.2	89.2	110.8	89.6	110.4	89.9	110.1	90.3	109.7
1.0	87.9	112.1	88.2	111.8	88.5	111.5	88.9	111.1	89.3	110.7	89.6	110.4	90.0	110.0	90.4	109.6
1.1	88.0	112.0	88.3	111.7	88.7	111.3	89.0	111.0	89.4	110.6	89.7	110.3	90.1	109.9	90.5	109.5
1.2	88.2	111.8	88.5	111.5	88.8	111.2	89.1	110.9	89.5	110.5	89.8	110.2	90.2	109.8	90.6	109.4
1.3	88.3	111.7	88.6	111.4	88.9	111.1	89.3	110.7	89.6	110.4	89.9	110.1	90.3	109.7	90.7	109.3
1.4	88.5	111.5	88.8	111.2	89.1	110.9	89.4	110.6	89.7	110.3	90.1	109.9	90.4	109.6	90.8	109.2
1.5	88.7	111.3	89.0	111.0	89.2	110.8	89.5	110.5	89.9	110.1	90.2	109.8	90.5	109.5	90.9	109.1
1.6	88.9	111.1	89.1	110.9	89.4	110.6	89.7	110.3	90.0	110.0	90.3	109.7	90.6	109.4	91.0	109.0
1.7	89.1	110.9	89.3	110.7	89.6	110.4	89.9	110.1	90.2	109.8	90.5	109.5	90.8	109.2	91.1	108.9
1.8	89.3	110.7	89.5	110.5	89.8	110.2	90.0	110.0	90.3	109.7	90.6	109.4	90.9	109.1	91.2	108.8
1.9	89.5	110.5	89.7	110.3	90.0	110.0	90.2	109.8	90.5	109.5	90.8	109.2	91.1	108.9	91.4	108.6
2.0	89.7	110.3	89.9	110.1	90.1	109.9	90.4	109.6	90.7	109.3	90.9	109.1	91.2	108.8	91.5	108.5
2.1	89.9	110.1	90.1	109.9	90.3	109.7	90.6	109.4	90.8	109.2	91.1	108.9	91.4	108.6	91.7	108.3
2.2	90.1	109.9	90.3	109.7	90.6	109.4	90.8	109.2	91.0	109.0	91.2	108.8	91.5	108.5	91.7	108.0
2.3	90.4	109.6	90.6	109.4	90.8	109.2	91.0	109.0	91.2	108.8	91.5	108.5	91.7	108.3	92.0	108.0
2.4	90.6	109.4	90.8	109.2	91.0	109.0	91.2	108.8	91.4	108.6	91.7	108.3	91.9	108.1	92.2	107.8
2.5	90.8	109.2	91.0	109.0	91.2	108.8	91.4	108.6	91.6	108.4	91.9	108.1	92.1	107.9	92.4	107.6
2.6	91.1	108.9	91.2	108.8	91.4	108.6	91.6	108.4	91.8	108.2	92.1	107.9	92.3	107.7	92.6	107.4
2.7	91.3	108.7	91.5	108.5	91.6	108.4	91.8	108.2	92.0	108.0	92.3	107.7	92.5	107.5	92.7	107.3
2.8	91.5	108.5	91.7	108.3	91.9	108.1	92.0	108.0	92.2	107.8	92.5	107.5	92.7	107.3	92.9	107.1
2.9	91.8	108.2	91.9	108.1	92.1	107.9	92.3	107.7	92.5	107.5	92.7	107.3	92.9	107.1	93.1	106.9
3.0	92.0	108.0	92.2	107.8	92.3	107.7	92.5	107.5	92.7	107.3	92.9	107.1	93.1	106.9	93.3	106.7
3.1	92.2	107.8	92.4	107.6	92.5	107.5	92.7	107.3	92.9	107.1	93.1	106.9	93.3	106.7	93.5	106.5
3.2	92.5	107.5	92.6	107.4	92.8	107.2	92.9	107.1	93.1	106.9	93.3	106.7	93.5	106.5	93.7	106.3
3.3	92.7	107.3	92.9	107.1	93.0	107.0	93.2	106.8	93.4	106.6	93.5	106.5	93.7	106.3	93.9	106.1
3.4	93.0	107.0	93.1	106.9	93.3	106.7	93.4	106.6	93.6	106.4	93.8	106.2	94.0	106.0	94.2	105.8
3.5	93.2	106.8	93.3	106.7	93.5	106.5	93.6	106.4	93.8	106.2	94.0	106.0	94.2	105.8	94.4	105.6
3.6	93.4	106.6	93.6	106.4	93.7	106.3	93.9	106.1	94.0	106.0	94.2	105.8	94.4	105.6	94.6	105.4
3.7	93.7	106.3	93.8	106.2	94.0	106.0	94.1	105.9	94.3	105.7	94.4	105.6	94.6	105.4	94.8	105.2
3.8	93.9	106.1	94.1	105.9	94.2	105.8	94.4	105.6	94.5	105.5	94.7	105.3	94.8	105.2	95.0	105.0
3.9	94.2	105.8	94.3	105.7	94.4	105.6	94.6	105.4	94.7	105.3	94.9	105.1	95.1	104.9	95.3	104.7
4.0	94.4	105.6	94.6	105.4	94.7	105.3	94.8	105.2	95.0	105.0	95.1	104.9	95.3	104.7	95.5	104.5
4.1	94.7	105.3	94.8	105.2	94.9	105.1	95.1	104.9	95.2	104.8	95.4	104.6	95.5	104.5	95.7	104.3
4.2	94.9	105.1	95.0	105.0	95.2	104.8	95.3	104.7	95.5	104.5	95.6	104.4	95.8	104.2	95.9	104.1
4.3	95.2	104.8	95.3	104.7	95.4	104.6	95.6	104.4	95.7	104.3	95.8	104.2	96.0	104.0	96.2	103.8
4.4	95.4	104.6	95.5	104.5	95.7	104.3	95.8	104.2	95.9	104.1	96.1	103.9	96.2	103.8	96.4	103.6
4.5	95.7	104.3	95.8	104.2	95.9	104.1	96.0	104.0	96.2	103.8	96.3	103.7	96.5	103.5	96.6	103.4
4.6	95.9	104.1	96.0	104.0	96.2	103.8	96.3	103.7	96.4	103.6	96.6	103.4	96.7	103.3	96.9	103.1
4.7	96.2	103.8	96.3	103.7	96.4	103.6	96.5	103.5	96.7	103.3	96.8	103.2	97.0	103.0	97.1	102.9
4.8	96.4	103.6	96.5	103.5	96.6	103.4	96.8	103.2	96.9	103.1	97.0	103.0	97.2	102.8	97.3	102.7
4.9	96.7	103.3	96.8	103.2	96.9	103.1	97.0	103.0	97.2	102.8	97.3	102.7	97.4	102.6	97.6	102.4
5.0	96.9	103.1	97.0	103.0	97.1	102.9	97.3	102.7	97.4	102.6	97.5	102.5	97.7	102.3	97.8	102.2
5.1	97.2	102.8	97.3	102.7	97.4	102.6	97.5	102.5	97.6	102.4	97.8	102.2	97.9	102.1	98.1	101.9
5.2	97.4	102.6	97.5	102.5	97.6	102.4	97.8	102.2	97.9	102.1	98.0	102.0	98.2	101.8	98.3	101.7
5.3	97.7	102.3	97.8	102.2	97.9	102.1	98.0	102.0	98.1	101.9	98.3	101.7	98.4	101.6	98.6	101.4
5.4	97.9	102.1	98.0	102.0	98.2	101.8	98.3	101.7	98.4	101.6	98.5	101.5	98.7	101.3	98.8	101.2
5.5	98.2	101.8	98.3	101.7	98.4	101.6	98.5	101.5	98.7	101.3	98.8	101.2	98.9	101.1	99.1	100.9
5.6	98.5	101.5	98.6	101.4	98.7	101.3	98.8	101.2	98.9	101.1	99.1	100.9	99.2	100.8	99.4	100.6
5.7	98.7	101.3	98.9	101.1	99.0	101.0	99.1	100.9	99.2	100.8	99.4	100.6	99.6	100.4	99.7	100.3
5.8	99.1	100.9	99.2	100.8	99.3	100.7	99.4	100.6	99.6	100.4	99.8	100.2	100.0	100.0	.	.
5.9	99.4	100.6	99.6	100.4	99.7	100.3	99.9	100.1	.	.	.	.	.	.	.	.