



SLOVENSKI STANDARD SIST ISO 5613:1995

01-november-1995

Pogonska verižna kolesa verižnih transporterjev

Mining -- Drive sprocket assemblies for chain conveyors

Exploitation minière -- Tourteaux d'entraînement à empreintes pour convoyeurs à chaînes

(standards.iteh.ai)

Ta slovenski standard je istoveten z: **ISO 5613:1984**

<https://standards.iteh.ai/catalog/standards/sist/3aa153e3-9890-4a4e-963e-067c64de303/sist-iso-5613-1995>

ICS:

53.040.20	Deli za transporterje	Components for conveyors
73.100.40	Oprema za vleko in dviganje	Haulage and hoisting equipment

SIST ISO 5613:1995

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 5613:1995

<https://standards.iteh.ai/catalog/standards/sist/3aa153e3-9890-4a4e-963e-067c64def303/sist-iso-5613-1995>

International Standard



5613

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Mining — Drive sprocket assemblies for chain conveyors

Exploitation minière — Tourteaux d'entraînement à empreintes pour convoyeurs à chaînes

First edition — 1984-06-15

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 5613:1995](https://standards.iteh.ai/catalog/standards/sist/3aa153e3-9890-4a4e-963e-067c64de303/sist-iso-5613-1995)

<https://standards.iteh.ai/catalog/standards/sist/3aa153e3-9890-4a4e-963e-067c64de303/sist-iso-5613-1995>

UDC 621.867.1 : 622.64

Ref. No. ISO 5613-1984 (E)

Descriptors : mining equipment, chain conveyors, chain drives, sprocket wheels, specifications, design, dimensions, marking.

Price based on 7 pages

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been authorized has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 5613 was developed by Technical Committee ISO/TC 82, *Mining*, and was circulated to the member bodies in October 1982.

It has been approved by the member bodies of the following countries:

Australia	Egypt, Arab Rep. of	Poland
Austria	France	Romania
Belgium	Germany, F.R.	Spain
Brazil	India	United Kingdom
Bulgaria	Korea, Dem. P. Rep. of	USSR
China	Mexico	
Czechoslovakia	New Zealand	

No member body expressed disapproval of the document.

Mining — Drive sprocket assemblies for chain conveyors

1 Scope and field of application

This International Standard specifies the requirements for a range of sprocket assemblies for use with twin outboard chain assemblies for chain conveyors. These assemblies incorporate sprocket rings designed to accept chains complying with ISO 610, shackle type connectors complying with ISO 1082 and scraper bars complying with ISO 5612.

2 References

ISO 610, *High-tensile steel chains (round link) for chain conveyors and coal ploughs*.

ISO 1082, *Mining — Shackle type connector units for chain conveyors*.

ISO 5612, *Mining — Scraper bars for chain conveyors*.

3 Definitions

For the purpose of this International Standard, the following definitions apply:

3.1 drive sprocket assembly: An arrangement which comprises the drive sprocket rings and connecting barrel, shown in figure 1, or a barrel incorporating integral drive sprocket rings.

3.2 drive sprocket ring: A toothed wheel by which the chain of a chain conveyor is driven.

3.3 connecting barrel: A cylindrical spacer between two drive sprocket rings.

3.4 sprocket pocket: That part of a complete sprocket ring into which either a chain link or shackle type connector sits.

3.5 inspector: The representative of the purchaser.

4 Drive sprocket assembly

4.1 Design

Drive sprocket assemblies as shown in figure 1 shall conform to the dimensions and tolerances stated in tables 1 and 2 which are based on the design formulae given in the annex. Unless

otherwise specified by the purchaser and having regard to these limitations, it is the manufacturer's responsibility to ensure that the assembly and its components shall be of adequate strength for the duty which they are required to perform, when related to the dimensions and mechanical properties of the appropriate chain (see ISO 610).

4.2 Assembly

When constructing the drive sprocket assembly shown in figure 1, the profiles of each complete sprocket ring shall be aligned with the other within the permitted tolerances stated in 5.1. Where applicable, care shall be taken to adopt the correct welding procedure for the steels used for the sprocket rings and the barrel.

4.3 Dimensional tests

The dimensions for each sprocket assembly given in table 2 shall be verified by methods agreed between the purchaser and the manufacturer.

NOTE — An associated guidance document on methods of verifying sprocket dimensions is being prepared.

4.4 Workmanship

Where applicable, all welds shall be smoothly finished, and on visual examination, have no harmful fissures, notches or other imperfections.

Magnetic and/or fluorescent crack deflection, gamma radiography or other forms of non-destructive testing shall be specified only by agreement between purchaser and manufacturer. Such methods of testing and the criteria to be applied shall be clearly defined and agreed at the time of the enquiry and order.

4.5 Marking

Each sprocket assembly shall be visibly and permanently marked with

- the manufacturer's registered trade name or trade mark;
- the size and pitch of chain and the chain centres (see table 1);
- any other marking as agreed between the purchaser and the manufacturer.

ISO 5613-1984 (E)

4.6 General inspection

For the purpose of witnessing the specified tests and inspecting the testing machines and methods of examination, the inspector shall be given access to the relevant parts of the works of the manufacturer at all reasonable times.

5 Sprocket ring and barrel

5.1 Dimensions

Drive sprocket rings as shown in figure 2 shall comply with the dimensions and tolerances stated in table 2. The compatibility between chain and sprocket shall be verified by methods agreed between the purchaser and the manufacturer (see note to 4.3).

5.2 Construction

Drive sprocket rings shall comply with one of the following methods of construction:

- a) cast in one piece;
- b) machined from the solid;
- c) a pair of forged or cast inner and outer half rings.

Radial alignment between the profiles of the sprocket teeth of each ring in the finished drive sprocket assembly shall be within 1 mm measured at the centreline of the chain.

5.3 Design and materials

The selection of materials, any heat treatment and the method of construction shall be agreed between the purchaser and the manufacturer.

**Table 1 — Sprocket assemblies
and corresponding chain centres**

Dimensions in millimetres

Nominal size and pitch of chain	Nominal dimension of chain centres ¹⁾ , $A \pm 1$					
	350	400	500	600	650	700
14 × 50						
18 × 64	400	500	600	650	700	
22 × 86	450	500	600	650	700	750
24 × 86	600					
24 × 87,5	600					
26 × 92	500	600	650	700	800	

1) See figure 1.

NOTE — These chain centres correspond to the nominal chain centres specified in ISO 5612.

Other chain centres may be specified by agreement between the manufacturer and purchaser.

SIST ISO 5613:1995

<https://standards.iteh.ai/catalog/standards/sist/3aa153e3-9890-4a4e-963e-067c64def303/sist-iso-5613-1995>


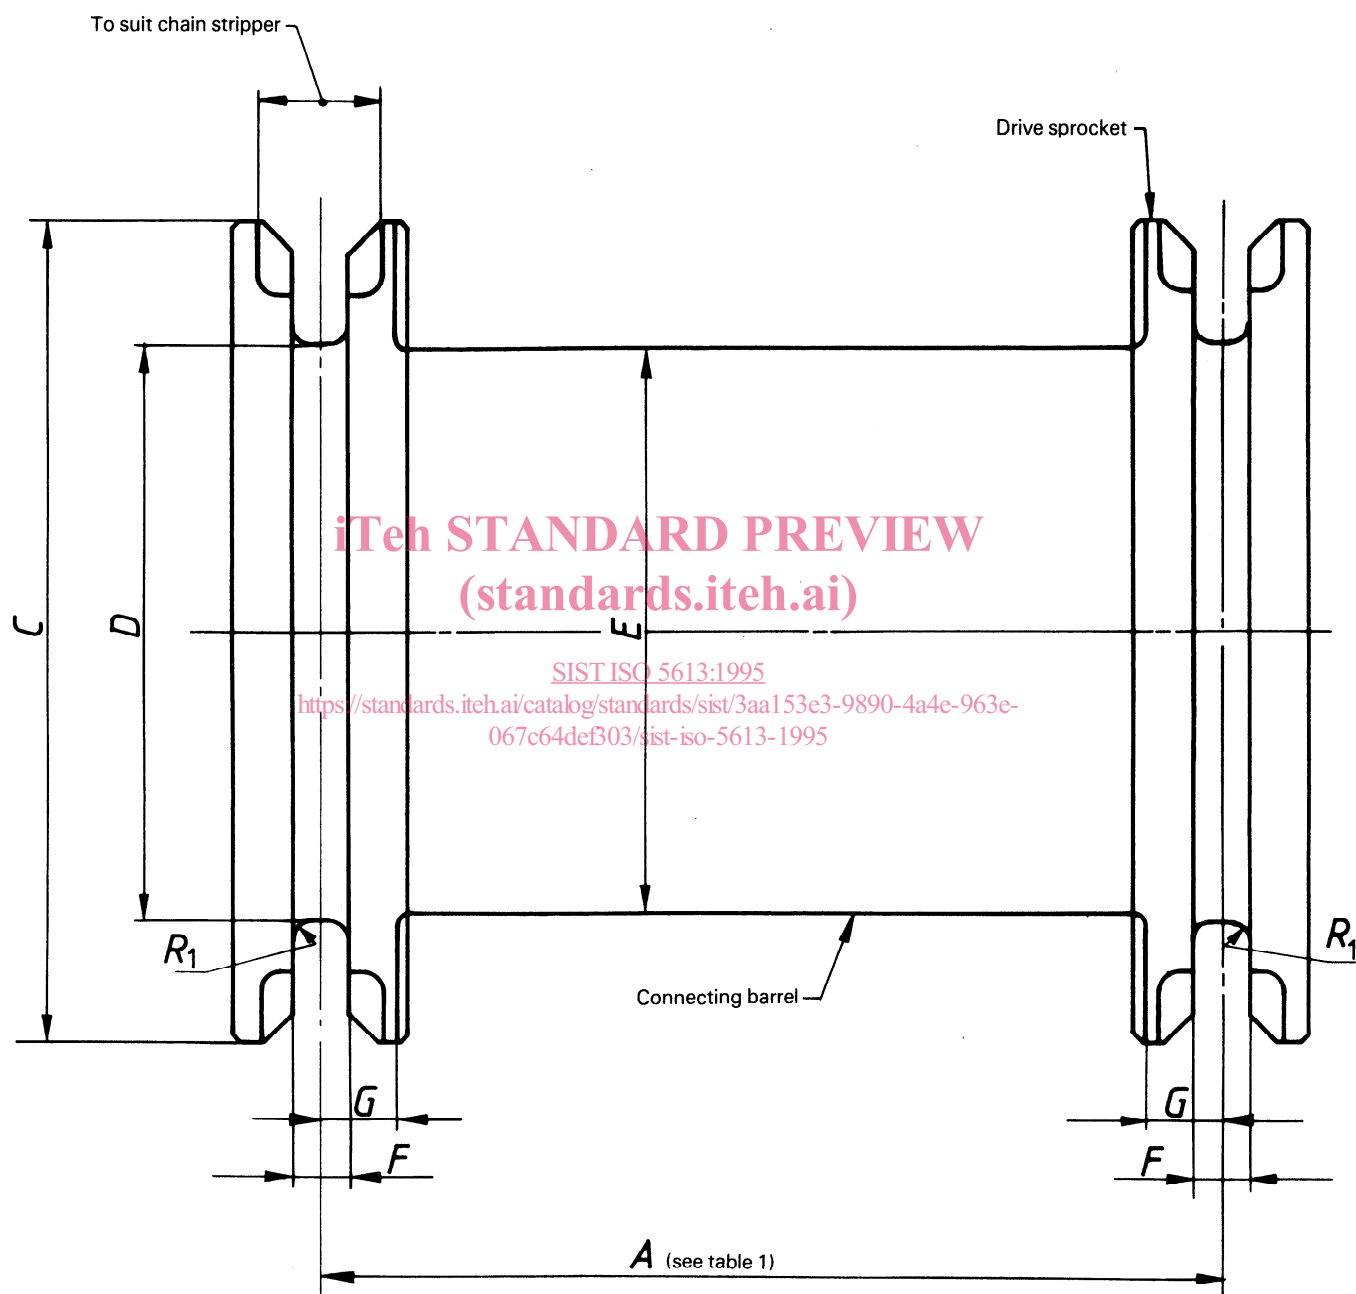


Figure 1 — Typical sprocket assembly

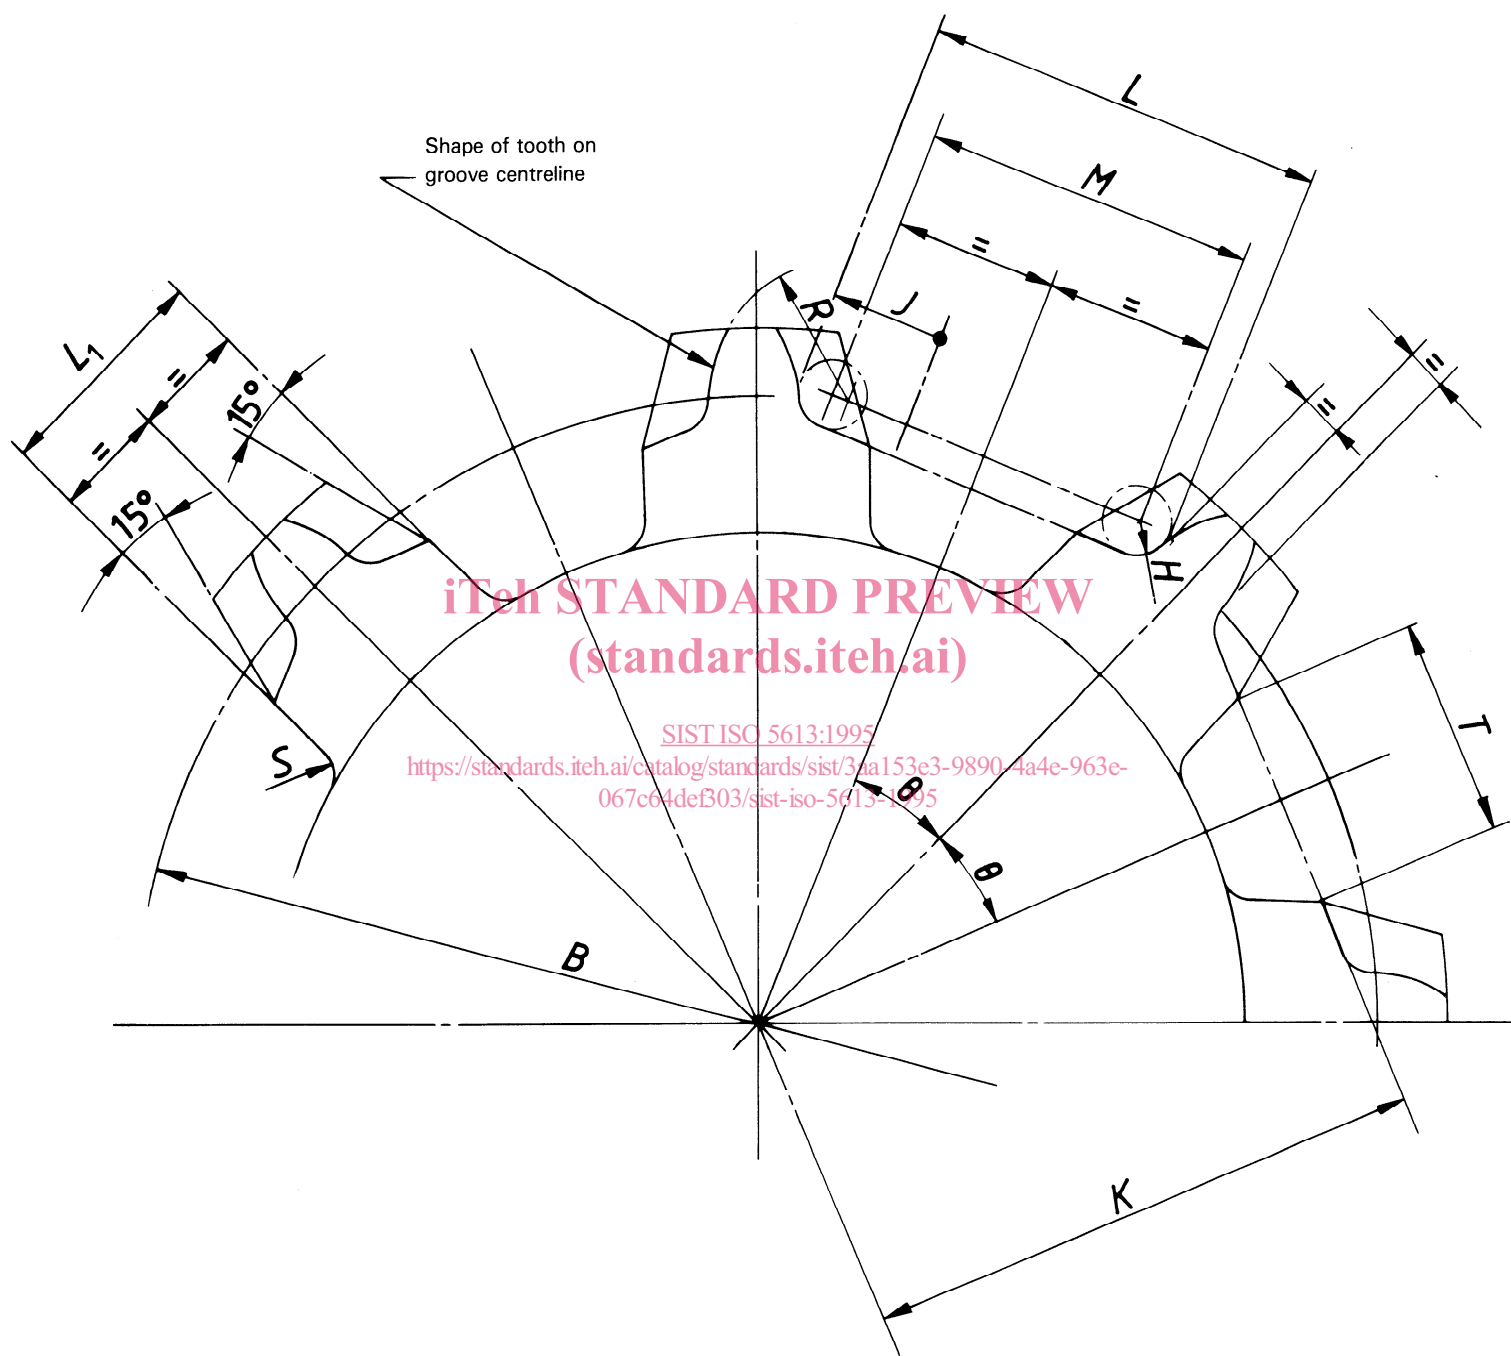

NOTE — See clause A.16 with reference to dimension T .

Figure 2 — Tooth profile

Table 2 — Sprocket dimensions

Nominal size and pitch of chain	Number of sprocket teeth N	Pitch circle diameter of sprocket B	Overall diameter C	Groove diameter D	Barrel diameter E	Groove width F		Centreline of groove to inside face G	Root radius H		Pocket plan radius J	Height from centre to bottom of pocket K		Length of pocket L		Tooth stub thickness L_1	Pocket centres M	Tooth flank radius R	Groove radius R_1	Tooth stub root radius S
						min.	tol.		nom.	tol.		nom.	tol.	nom.	tol.					
14 × 50	5	162	190	104	92							67,5								
	6	193	221	136	126							84,5								
	7	225	253	168	159						24	101	0	82	+2	46	68	29	7	7
	8	256	284	201	192	16,0	+1,5 0	33	7	+0,5 0		117,5	-1,5							
	9	288	316	232	224							133,5								
18 × 64	10	320	348	263	256							149,5								
	5	208	244	135	122							86,5								
	6	248	284	176	165							108								
	7	288	324	216	207						30	129	0	105	+2	60	87	37	9	9
	8	328	364	257	249	21,0	+1,5 0	34	9	+0,5 0		150	-1,5							
22 × 86	9	369	405	298	291							171								
	5	279	323	188	172							118								
	6	333	377	243	229							146,5								
	7	387	431	298	286						37	175	0	136	+2	81	114	53	11	11
	8	441	485	353	342	26,0	+1,5 0	50	11	+0,5 0		203	-1,5							
24 × 86	9	495	539	408	398							231								
	5	279	327	182	164							116,5								
	6	333	381	237	222							146,5								
	7	387	435	291	278						40	173,5	0	140	+2	81	116	50	12	12
	8	441	489	346	335	28,0	+1,5 0	53	12	+0,5 0		202	-1,5							
24 × 87,5	9	495	543	400	390							229,5								
	5	284	332	186	168							118,5								
	6	339	387	242	227							148								
	7	394	442	298	285						40	177	0	142	+2	82	118	51,5	12	12
	8	449	497	353	342	28,0	+1,5 0	53	12	+0,5 0		205,5	-1,5							
26 × 92	9	504	552	409	399							234								
	5	299	350	194	175							124,5								
	6	356	408	252	236							155								
	7	414	466	311	297						43	186,5	0	151	+2	86	125	53	13	13
	8	472	524	369	357	30,0	+1,5 0	57	13	+0,5 0		215,5	-1,5							
26 × 92	9	530	582	428	417							245,5								