
International Standard



5652

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Information processing — 9-Track, 12,7 mm (0.5 in) wide magnetic tape for information interchange — Format and recording, using group coding at 246 cpmm (6 250 cpi)

Traitement de l'information — Bande magnétique à 9 pistes de 12,7 mm (0,5 in) de large pour l'échange d'information — Format et enregistrement utilisant des codages de groupe à 246 cpmm (6 250 cpi)

ITeH STANDARD PREVIEW

First edition — 1983-01-15

(standards.iteh.ai)

[ISO 5652:1983](#)

<https://standards.iteh.ai/catalog/standards/sist/0d472529-6569-4608-85f1-22176fe452e3/iso-5652-1983>

UDC 681.3.04 : 681.327.64

Ref. No. ISO 5652-1983 (E)

Descriptors : data processing, information interchange, magnetic tapes, magnetic recording, definitions, operating requirements, recording characteristics, equipment specifications, 9-tracks.

Price based on 15 pages

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been authorized has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 5652 was developed by Technical Committee ISO/TC 97, *Information processing systems*, and was circulated to the member bodies in April 1981.

It has been approved by the member bodies of the following countries:

Belgium	Italy	Sweden
Canada	Japan	Switzerland
Czechoslovakia	Mexico	United Kingdom
Egypt, Arab Rep. of	Netherlands	USA
Finland	Poland	USSR
France	Romania	Yugoslavia
Germany, F.R.	South Africa, Rep. of	
Ireland	Spain	

No member body expressed disapproval of the document.

Contents

	Page
1 Scope and field of application	1
2 References	1
3 Definitions	1
3.1 Magnetic tape	1
3.2 Reference tape	1
3.3 Secondary reference tape	1
3.4 Signal amplitude reference tape	1
3.5 Typical field	1
3.6 Reference field	1
3.7 Standard reference amplitude	2
3.8 Reference edge	2
3.9 In contact	2
3.10 Track	2
3.11 Row	2
3.12 Position of flux transition	2
3.13 Physical recording density	2
3.14 Data density	2
3.15 Skew	2
3.16 ECC character	2
3.17 Auxiliary CRC character	2
3.18 CRC character	2
3.19 Preamble	2
3.20 Postamble	2
3.21 Density identification area (ID burst)	2
3.22 Automatic Read Amplification (ARA burst)	2

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/0d472529-6569-4608-85f1-222736f85214/sist/5652-1983>

	Page
3.23 Error	2
4 Operating and transportation conditions	2
4.1 Operating environment	2
4.2 Transportation	2
4.3 Wind tension	2
5 Recording	2
5.1 Method of recording	2
5.2 Density of recording	2
5.3 Average flux transition spacings	3
5.4 Instantaneous flux transition spacings	3
5.5 Skew	4
5.6 Signal amplitude	4
5.7 Erasure	4
6 Tracks	4
6.1 Number of tracks	4
6.2 Track identification	4
6.3 Track positions	4
6.4 Track width	4
7 Data representation	4
7.1 7-bit coded characters	4
7.2 8-bit coded characters	4
8 Data formatting	5
8.1 Data groups	5
8.2 Residual group	5
8.3 CRC group	5
8.4 Check characters	6
9 Recording of groups on tape	7
10 Control sub-groups	8
10.1 Terminator control sub-groups (TERM)	8
10.2 Second control sub-groups (SEC)	8
10.3 Synchronization control sub-group (SYNC)	8

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 5652:1983
<https://standards.iteh.ai/catalog/standards/sist/0d472529-6569-4608-85f1-221761e452e3/iso-5652-1983>

	Page
10.4 MARK 1 control sub-group	8
10.5 MARK 2 control sub-group	8
10.6 END MARK sub-group.....	8
11 Storage block	8
11.1 Data portion	8
11.2 Structure of a block.....	9
11.3 Interblock gap.....	9
11.4 Maximum data density	9
12 Tape format	9
12.1 Density identification area (ID burst).....	9
12.2 Gap G1	9
12.3 Automatic Read Amplification (ARA) Area.....	10
12.4 Gap G2.....	10
12.5 Tape mark.....	10
13 Interchange criteria	11
https://standards.iteh.ai/catalog/standards/sist/72529-6569-4608-85f1-22176fe452e3/iso-5652-1983	
13.1 Correctable errors	11
13.2 Acceptable criteria	11
13.3 Elongated interblock gap	11
Annexes	
A Transportation	12
B Measurement of flux transition spacing.....	13

iTeh STANDARD PREVIEW
(standards.iteh.ai)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 5652:1983

<https://standards.iteh.ai/catalog/standards/sist/0d472529-6569-4608-85f1-22176fe452e3/iso-5652-1983>

Information processing — 9-Track, 12,7 mm (0.5 in) wide magnetic tape for information interchange — Format and recording, using group coding at 246 cpmm (6 250 cpi)

1 Scope and field of application

This International Standard specifies a format and recording standard for 9-track, 12,7 mm (0.5 in) magnetic tape to be used for data interchange between information processing systems, communication systems, and associated equipment utilizing the 7-bit coded character set (see ISO 646), its extension in ISO 2022 where required, and the 8-bit coded character set (see ISO 4873). Magnetic labelling for use on magnetic tape is the subject of ISO 1001. The magnetic tape and reel to be used shall conform to ISO 1864.

NOTE — Numeric values in the SI and/or Imperial measurement system in this International Standard may have been rounded and therefore are consistent with, but not exactly equal to, each other. Either system may be used, but the two should be neither intermixed nor reconverted. The original design was made using the Imperial measurement system.

2 References

ISO 646, *Data processing-7-bit coded character set for information interchange*.¹⁾

ISO 1001, *Information processing — Magnetic tape labelling and file structure for information interchange*.

ISO 1864, *Information processing — Unrecorded 12,7 mm (0.5 in) wide magnetic tape for information interchange — 32 ftpmm (800 ftpi) NRZ1, 126 ftpmm (3 200 ftpi) phase encoded and 356 ftpmm (9 042 ftpi), NRZ1*.²⁾

ISO 2022, *Information processing — ISO 7-bit and 8-bit coded character sets — Coded extension techniques*.³⁾

ISO 4873, *Information processing — 8-bit coded character set for information interchange*.

3 Definitions

For the purpose of this International Standard, the following definitions apply.

3.1 magnetic tape : A tape which will accept and retain magnetic signals intended for input, output and storage purposes on computers and associated equipment.

3.2 reference tape : A tape which has been selected for given properties for use in calibration.

3.3 secondary reference tape : A tape intended for routine calibrating purposes whose performance is known and is stated in relation to that of a reference tape.

3.4 signal amplitude reference tape : A reference tape selected as a standard for signal amplitude.

NOTE — A master standard (computer amplitude reference) has been established at the US National Bureau of Standards (NBS) based on reference tapes and heads. Secondary signal amplitude reference tapes are available from the NBS⁴⁾ under the part number SRM 6250.

3.5 typical field : The minimum recording field which, when applied to a magnetic tape, causes a signal output equal to 95 % of the maximum signal amplitude at the specified physical recording density.

3.6 reference field : The typical field of the signal amplitude reference tape at 356 ftpmm (9 042 ftpi).

1) At present at the stage of draft. (Revision of ISO 646-1973.)

2) At present at the stage of draft. (Revision of ISO 1864-1975.)

3) At present at the stage of draft. (Revision of ISO 2022-1973.)

4) Office of Standard Reference Materials, Room B 311, Chemistry Building, National Bureau of Standard (NBS), Washington, B.C. 20234, USA.

3.7 standard reference amplitude : The average peak-to-peak signal amplitude derived from the signal amplitude reference tape on the NBS measurement system, or equivalent, under the recording conditions specified in ISO 1864.

3.8 reference edge : The edge furthest from an observer when a tape is lying flat with the magnetic surface uppermost and the direction of movement for recording is from left to right.

3.9 in contact : An operation condition in which the magnetic surface of a tape is in contact with a magnetic head.

3.10 track : A longitudinal area on a tape along which a series of magnetic signals may be recorded.

3.11 row : Nine transversely related locations (one in each track) in which bits are recorded.

3.12 position of flux transition : The point which exhibits the maximum free-space flux density normal to the tape surface.

3.13 physical recording density : The number of recorded flux transitions per unit length of track (ftpm or ftpi).

3.14 data density : The number of data characters stored per unit length of tape (cpmm or cpi).

3.15 skew : The maximum longitudinal deviation in the placement of bits within a row.

3.16 ECC character : A character used for error detection and correction within a data group.

3.17 auxiliary CRC character : A character used for error detection within the data part of a block.

3.18 CRC character : A character used for error detection within a complete block.

3.19 preamble : A pattern of signals marking the beginning of each storage block, used primarily for electronic synchronization.

3.20 postamble : A pattern of signals marking the end of each storage block.

3.21 density identification area (ID burst) : A burst of recording at the beginning of a tape identifying the use of the group-coded-recording method.

3.22 Automatic Read Amplification (ARA) burst : A burst of recording at the beginning of a tape which may be used for setting the gain of the read amplifiers.

3.23 error : The detection of a missing pulse or an extra pulse in a track. Missing pulse and extra pulse are as defined in ISO 1864 sub-clauses 5.16.1 c) and 5.16.2 respectively.

4 Operating and transportation conditions

4.1 Operating environment

Tapes used for data interchange shall be operated under the following conditions :

- temperature : 16 to 32 °C (60 to 90 °F);
- relative humidity : 20 to 80 %;
- wet bulb temperature : not greater than 26 °C (78 °F).

Conditioning before operating : If a tape has been exposed during storage and/or transportation to conditions outside the above values, it should be conditioned for a period of 2 to 12 h, depending on the extent of exposure.

4.2 Transportation

Responsibility for ensuring that adequate precautions against damage are taken during shipment shall lie with the sender (see annex A).

4.3 Wind tension

For interchange, the tape winding tension shall be between 2 N and 3,6 N (7 to 13 ozf).

5 Recording

5.1 Method of recording

The "non return to zero mark" (NRZ1) method of recording shall be used where a ONE is represented by a change of direction of longitudinal magnetization.

5.2 Density of recording

The nominal density shall be 356 ftpmm (9 042 ftpi). Other nominal densities used hereafter for specific measurements shall be :

178 ftpmm (4 521 ftpi)

119 ftpmm (3 014 ftpi).

5.3 Average flux transition spacings

The following measurements shall be made after interchange using a tape recorded at a density of 178 ftpmm (4 521 ftpi). The nominal flux transition spacing at this density shall be 5,618 μm (221.2 μin) subject to the following variations.

5.3.1 The long term average (static) flux transition spacing shall be within $\pm 4\%$ of the nominal spacing. This average shall be measured over a minimum of 5×10^5 successive flux transitions.

5.3.2 The short term average (dynamic) flux transition spacing, when referred to a particular flux transition spacing, is the average of that flux transition spacing and the preceding flux transition spacing.

The short term average flux transition spacing shall be within the limits of $\pm 6\%$ of the long term average flux transition spacing.

In addition, the rate of change of the short term average flux transition spacing shall not exceed 0,26 % per flux transition spacing.

5.4 Instantaneous flux transition spacings

The instantaneous spacing between flux transitions may be influenced by the reading and writing processes, the pattern recorded (pulse crowding effects) and other factors.


Instantaneous spacings between flux transitions shall meet the following conditions, when tested on the reference read chain (see annex B).

5.4.1 At the nominal maximum density of 356 ftpmm (9 042 ftpi) the spacing d_1 between successive flux transitions shall be between 48 % and 52 % of the corresponding short term average flux transition spacing determined at 178 ftpmm (4 521 ftpi).



<https://standards.iteh.ai/catalog/standards/sist/0d472529-6569-4608-85f1-22176f452e3/iso-5652-1983>

5.4.2 In a sequence of flux transitions defined by the bit pattern 1110011100..., the average displacement of the spacing of the flux transitions on either side of a reference transition, from that reference transition, shall be not more than $\pm 28\%$ from the average spacing of flux transitions at 356 ftpmm (9 042 ftpi).

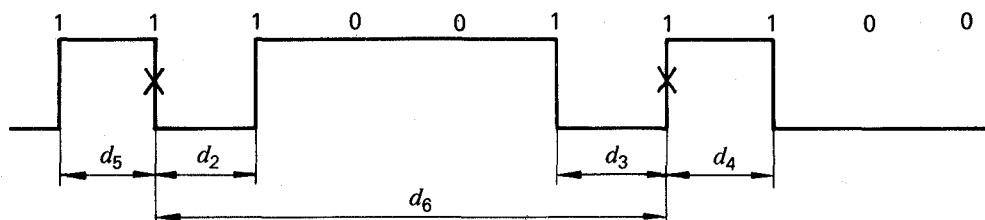

Crosses denote reference transitions.

$$1,28 d_1 > \text{average } d_5 > 0,72 d_1$$

$$1,28 d_1 > \text{average } d_2 > 0,72 d_1$$

$$1,28 d_1 > \text{average } d_3 > 0,72 d_1$$

$$1,28 d_1 > \text{average } d_4 > 0,72 d_1$$

The tolerances of long term average spacing and short term average spacing (see 5.3.1 and 5.3.2) are included in this deviation.

The average distance d_6 between actual consecutive reference flux transitions in a sequence defined by the bit pattern 1110011100... and the calculated distance $5d_1$, of six flux transitions at nominal maximum density of 356 ftpmm (9 042 ftpi) shall not differ by more than 6 % of d_1 .

$$5,06 d_1 > \text{average } d_6 > 4,94 d_1$$

5.5 Skew

No flux transition shall be displaced by more than 16,86 µm (664 µin) from any other flux transition in the same row. This displacement shall be measured as the distance between perpendiculars to the reference edge through the said flux transitions.

5.6 Signal amplitude

5.6.1 Standard reference amplitude

The standard reference amplitude is the average peak-to-peak signal amplitude derived from the signal amplitude reference tape on the qualified measurement system at the density of 356 ftpmm (9 042 ftpi) and the recording current $I_R = k \times I_f$ (see ISO 1864).

The signal amplitude shall be averaged over a minimum of 4 000 flux transitions and shall be measured on the read-while-write pass.

The reference current I_f is the current which produces the reference field (see 3.6).

5.6.2 Average signal amplitude

5.6.2.1 The average peak-to-peak signal amplitude of the interchanged tape at 356 ftpmm (9 042 ftpi) shall not deviate by more than ± 50 % from the standard reference amplitude.

5.6.2.2 The average peak-to-peak signal amplitude at 119 ftpmm (3 014 ftpi) shall be less than five times the standard reference amplitude.

5.6.2.3 Averaging shall be done over a minimum of 4 000 flux transitions, which for the interchange tape may be segmented into blocks. Averaging shall be done on the first-read pass after interchange.

5.6.3 Minimum signal amplitude

A tape to be interchanged shall contain no flux transition in more than one track since the last MARK 1 control sub-group, the base-to-peak amplitude of which is less than 15 % of half the standard reference amplitude.

5.7 Erasure

5.7.1 When erased, the rim end of the erased area of the tape shall be magnetized so that it is a North-seeking pole.

5.7.2 The full width of the tape shall be DC erased in the direction specified in 5.7.1.

5.7.3 The tape shall be erased so that the residual signal shall not exceed 4 % of the standard reference amplitude.

6 Tracks

6.1 Number of tracks

There shall be nine tracks.

6.2 Track identification

Tracks shall be numbered consecutively beginning at the reference edge with track 1.

6.3 Track positions

The distance from the centrelines of the tracks to the reference edge shall be :

- Track 1 : 0,74 ± 0,08 mm (0.029 ± 0.003 in)
- Track 2 : 2,13 ± 0,08 mm (0.084 ± 0.003 in)
- Track 3 : 3,53 ± 0,08 mm (0.139 ± 0.003 in)
- Track 4 : 4,93 ± 0,08 mm (0.194 ± 0.003 in)
- Track 5 : 6,32 ± 0,08 mm (0.249 ± 0.003 in)
- Track 6 : 7,72 ± 0,08 mm (0.304 ± 0.003 in)
- Track 7 : 9,12 ± 0,08 mm (0.359 ± 0.003 in)
- Track 8 : 10,52 ± 0,08 mm (0.414 ± 0.003 in)
- Track 9 : 11,91 ± 0,08 mm (0.469 ± 0.003 in)

6.4 Track width

The width of a written track shall be :
1,09 mm min. (0.043 in min.)

7 Data representation

The characters shall be represented by means of the 7-bit coded character set (see ISO 646) or the 8-bit coded character set (see ISO 4873) or, where required, of an extension of the 7-bit coded character set (see ISO 2022).

The bit-to-track allocation shall be as follows :

7.1 7-bit coded characters

Binary weight	2 ⁰	2 ¹	2 ²	2 ³	2 ⁴	2 ⁵	2 ⁶	—	—
Bit designation	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇	—	P
Track	2	8	1	9	3	5	6	7	4

Track 7 shall always be recorded with bit ZERO.

7.2 8-bit coded characters

Binary weight	2 ⁰	2 ¹	2 ²	2 ³	2 ⁴	2 ⁵	2 ⁶	2 ⁷	—
Bit designation	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇	b ₈	P
Track	2	8	1	9	3	5	6	7	4

Bit P in track 4 shall be the parity bit. The parity shall be odd.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
ISO 5652-1983
<https://standards.iteh.ai/catalog/standards/sist/0d472529-6569-4608-85ff-22176f452e3/iso-5652-1983>

8 Data formatting

Prior to recording, the data shall be arranged in groups completed with computed check characters (see 8.4). These data groups shall be in turn arranged in a given sequence together with groups of control characters. The data and control character groups so arranged are then recorded on the tape according to a specific coding scheme (see clause 9).

8.1 Data groups

A data group shall comprise 8 bytes as follows :

- in positions 1 to 7, seven data bytes;
- in position 8, an ECC character.

8.2 Residual group

A residual group shall be a group comprising :


- in positions 1 to 6, the remaining data bytes, if any;

- in positions 1 to 6, not occupied by a data byte, a padding character [byte (00) with odd parity];
- in position 7, an auxiliary CRC character;
- in position 8, an ECC character.

8.3 CRC group (see figure below)

After the residual group, a CRC group shall be formed comprising :

- in position 1 : byte (00) with odd parity if the number of preceding data groups is even, or the CRC character if the number of preceding data groups is odd;
- in positions 2 to 6, the CRC character;
- in position 7, the residual character;
- in position 8, an ECC character.

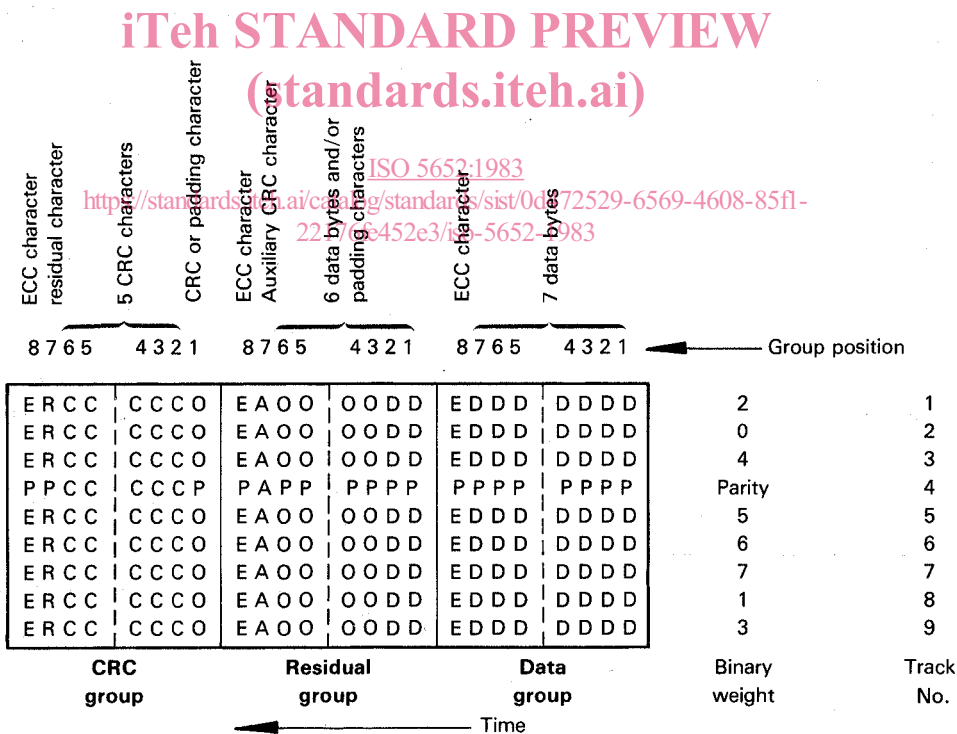

NOTE — The line of bits corresponding to each track number shown will then be group coded (see clause 9), and the resulting bit stream will then be recorded on the tape in the corresponding track.