



SLOVENSKI STANDARD
SIST EN 300 392-11-19 V1.1.1:2003
01-december-2003

Prizemni snopovni radio (TETRA) - Govor in podatki (V+D) - 11. del: Dopolnilne storitve stopnje 2 - 11.-19. del: Zapora dohodnih klicev (BIC)

Terrestrial Trunked Radio (TETRA); Voice plus Data (V+D); Part 11: Supplementary services stage 2; Sub-part 19: Barring of Incoming Calls (BIC)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **EN 300 392-11-19 Version 1.1.1**

SIST EN 300 392-11-19 V1.1.1:2003
<https://standards.iteh.ai/catalog/standards/sist/4d55dc65-3680-4c60-9ccc-a278887cbc56/sist-en-300-392-11-19-v1-1-1-2003>

ICS:

33.070.10	Prizemni snopovni radio (TETRA)	Terrestrial Trunked Radio (TETRA)
-----------	---------------------------------	-----------------------------------

SIST EN 300 392-11-19 V1.1.1:2003 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 392-11-19 V1.1.1:2003

<https://standards.iteh.ai/catalog/standards/sist/4d53dc65-3680-4c60-9ece-a278887cbc56/sist-en-300-392-11-19-v1-1-1-2003>

ETSI EN 300 392-11-19 V1.1.1 (2001-08)

European Standard (Telecommunications series)

**Terrestrial Trunked Radio (TETRA);
Voice plus Data (V+D);
Part 11: Supplementary services stage 2;
Sub-part 19: Barring of Incoming Calls (BIC)**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 392-11-19 V1.1.1:2003](https://standards.iteh.ai/catalog/standards/sist/4d53dc65-3680-4c60-9ece-a278887cbc56/sist-en-300-392-11-19-v1-1-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/4d53dc65-3680-4c60-9ece-a278887cbc56/sist-en-300-392-11-19-v1-1-1-2003>



Reference

DEN/TETRA-03A-11-19

Keywords

TETRA, supplementary service

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 392-11-19 V1.1.1:2003](https://standards.iteh.ai/catalog/standards/sist/4d53dc65-3680-4c60-9ece-a278887cbc56/sist-en-300-392-11-19-v1-1-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/4d53dc65-3680-4c60-9ece-a278887cbc56/sist-en-300-392-11-19-v1-1-1-2003>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.
All rights reserved.

Contents

Intellectual Property Rights	4
Foreword	4
1 Scope	6
2 References	6
3 Definitions and abbreviations	7
3.1 Definitions	7
3.2 Abbreviations	7
4 Functional model	7
4.1 Functional model description	7
4.2 Description of FEs	8
4.2.1 Affected user's FE, FE1	8
4.2.2 SS-BIC FE in SwMI, FE2	9
4.2.3 Authorized user's FE, FE3	9
4.2.4 SS-BIC FE2 in visited SwMI	9
4.2.5 Calling party's FE, FE5	9
4.3 Relationship with a basic and a packet data service	10
5 Information flows	10
5.1 Void	10
5.2 Definition of information flows	10
5.2.1 Definition	10
5.2.1.1 DEFINE and DEFINE EXTERNAL	11
5.2.1.2 DEFINE ACK	12
5.2.1.3 DEFINE/DEFINE EXTERNAL USER	13
5.2.1.4 DEFINE USER ACK	13
5.2.2 Interrogation	14
5.2.2.1 INTERROGATE	14
5.2.2.2 INTERROGATE ACK	14
5.2.3 Operation	15
5.2.3.1 CALL BARRED	16
5.3 Service primitives	16
5.4 Information flow sequences	17
5.4.1 Definition	17
5.4.2 Definition over ISI	18
5.4.3 Interrogation	19
5.4.4 Interrogation over ISI	19
5.4.5 Operation	20
5.4.6 Operation of SS-BIC when the service is barred through ISI	20
5.5 FE actions	20
5.5.1 FE actions of FE1	20
5.5.2 FE actions of FE2	21
5.5.3 FE actions of FE3	21
5.5.4 FE actions of visited SwMI FE2	21
5.5.5 FE actions of FE5	21
6 Allocation of FEs to physical equipment	22
7 Inter-working considerations	22
History	23

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Project Terrestrial Trunked Radio (TETRA).

The present document had been submitted to Public Enquiry as ETS 300 392-11-19. During the processing for Vote it was converted into an EN.

The present document is part 11, sub-part 19 of a multi-part deliverable covering Voice plus Data (V + D), as identified below:

- Part 1: "General network design";
- Part 2: "Air Interface (AI)";
- Part 3: "Interworking at the Inter-System Interface (ISI)";
- Part 4: "Gateways basic operation";
- Part 5: "Peripheral Equipment Interface (PEI)";
- Part 7: "Security";
- Part 9: "General requirements for supplementary services";
- Part 10: "Supplementary services stage 1";
- Part 11: "Supplementary services stage 2";**
- Part 12: "Supplementary services stage 3";
- Part 13: "SDL model of the Air Interface (AI)";
- Part 14: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 15: "TETRA frequency bands, duplex spacings and channel numbering";
- Part 16: "Network Performance Metrics";
- Part 17: "TETRA V+D and DMO Release 1.1 specifications".

National transposition dates	
Date of adoption of this EN:	3 August 2001
Date of latest announcement of this EN (doa):	30 November 2001
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 May 2002
Date of withdrawal of any conflicting National Standard (dow):	31 May 2002

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 300 392-11-19 V1.1.1:2003](https://standards.iteh.ai/catalog/standards/sist/4d53dc65-3680-4c60-9ecea278887cbc56/sist-en-300-392-11-19-v1-1-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/4d53dc65-3680-4c60-9ecea278887cbc56/sist-en-300-392-11-19-v1-1-1-2003>

1 Scope

The present document defines the stage 2 specification of the Supplementary Service Barring of Incoming Calls (SS-BIC) for the Terrestrial Trunked Radio (TETRA) as provided by European operators.

SS-BIC enables barring restrictions for incoming services, e.g. calls, to be set. SS-BIC specifies the definition, interrogation and operation of the supplementary service. The Switching and Management Infrastructure (SwMI) applies the SS-BIC definitions when an incoming service is requested for the restricted user. The SS-BIC actions are defined for the SwMI, for the Mobile Station (MS) and for the Line Station (LS). The SS-BIC information flows may be delivered over the Inter-System Interface (ISI).

SS-BIC is invoked for incoming services within one TETRA system or for services that extend over the ISI to several TETRA systems.

Man-Machine Interface (MMI) and charging principles are outside the scope of the present document.

Stage 2 describes the functional capabilities of the Supplementary Service introduced in stage 1 description. Stage 2 identifies the functional capabilities for the management and operation of the service in the SwMI, in the MS and in the LS. Stage 2 describes also the information flows exchanged between these entities and the flows sent over the ISI.

NOTE: The stage 2 description is followed by the stage 3 description, which specifies the encoding rules for the information flows and process behaviour for the different entities in the SwMI, in the MS and in the LS.

Aspects relating to all supplementary services are detailed in EN 300 392-9 [5].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] ETSI EN 300 392-2: "Terrestrial Trunked Radio (TETRA); Voice plus Data (V+D); Part 2: Air Interface (AI)".
- [2] ETSI EN 300 392-12-19: "Terrestrial Trunked Radio (TETRA); Voice plus Data (V+D); Part 12: Supplementary services stage 3; Sub-part 19: Barring of Incoming Calls (BIC)".
- [3] ETSI ETS 300 392-10-1: "Terrestrial Trunked Radio (TETRA); Voice plus Data (V+D); Part 10: Supplementary services stage 1; Sub-part 1: Call identification".
- [4] ETSI ETS 300 392-10-6: "Terrestrial Trunked Radio (TETRA); Voice plus Data (V+D); Part 10: Supplementary services stage 1; Sub-part 6: Call Authorized by Dispatcher (CAD)".
- [5] ETSI EN 300 392-9: "Terrestrial Trunked Radio (TETRA); Voice plus Data (V+D); Part 9: General requirements for supplementary services".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

affected user: user whose incoming services are barred

authorized user: user who is permitted to define SS-BIC on affected user's behalf

calling party: party whose service request is barred due to SS-BIC

packet data service: packet mode data service, see EN 300 392-2, clause 28

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CC	Call Control functional entity
CCA	Call Control functional entity Agent
FE	Functional Entity
ISI	Inter-System Interface
LS	Line Station
MS	Mobile Station
SS-BIC	Supplementary Service Barring of Incoming Calls
SwMI	Switching and Management Infrastructure
TETRA	Terrestrial Trunked Radio
V+D	Voice plus Data

SIST EN 300 392-11-19 V1.1.1:2003

4 Functional model

<https://standards.iteh.ai/catalog/standards/sist/4d53dc65-3680-4c60-9ece-a27b20c216/sist-en-300-392-11-19-v1-1-1-2003>

4.1 Functional model description

The functional model shall comprise the following Functional Entities (FEs):

FE1 affected user's FE for SS-BIC in MS/LS;

FE2 SS-BIC FE in SwMIs;

FE3 authorized party's FE for SS-BIC in MS/LS;

FE5 calling party's FE for SS-BIC in MS/LS;

CC call control functional entity in SwMI;

CCA call control functional entity agent in MS/LS.

NOTE: CC/CCA refers to any basic service sub-entity or packet mode data service entity, which is used in conjunction with SS-BIC.

The following relationships shall exist between these FEs:

- ra between FE1 and FE2;
- rb between FE2s in different TETRA systems for management;
- rc between FE2 and FE3;
- rd between FE2s in different TETRA systems for operation;
- re between FE1 and visited SwMI FE2;
- rf between FE3 and visited SwMI FE2;
- rg between FE2 and FE5.

Figures 1 and 2 show these FEs and their relationships. Figure 1 gives the functional model for the management part and figure 2 gives the functional model for the operational part.


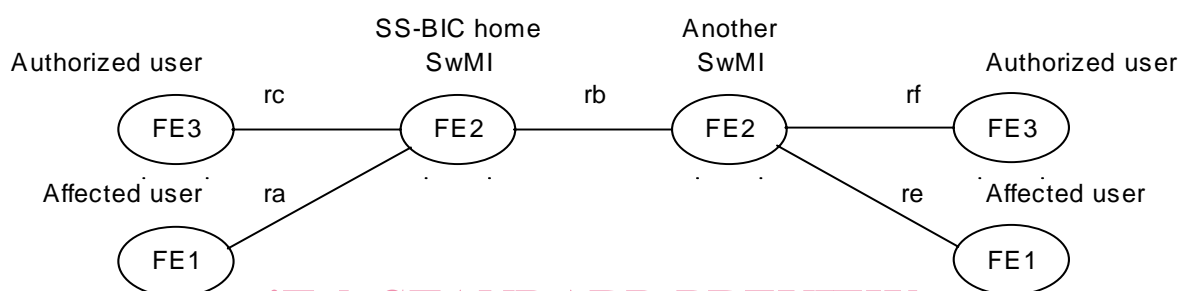


Figure 1: Functional model for the management part
(standards.iteh.ai)

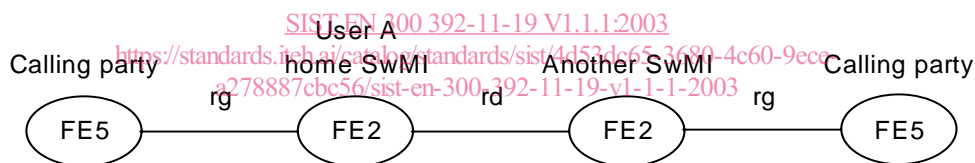

NOTE: FE1 does not receive any information of the barring.

Figure 2: Functional model for the operational part

4.2 Description of FEs

4.2.1 Affected user's FE, FE1

The functional tasks of FE1 shall be the following:

- upon reception of an SS-BIC definition indication from the SwMI, FE1 shall inform the user application;
- upon reception of an SS-BIC interrogation request from the user, FE1 shall send the interrogation request to the SwMI;
- upon reception of an SS-BIC interrogation response from the SwMI, FE1 shall inform the user of the response.

4.2.2 SS-BIC FE in SwMI, FE2

The functional tasks of FE2 shall be the following in the home system of the restricted identity:

- upon reception of an SS-BIC definition request from FE3, FE2 shall save the definition in the SwMI and acknowledge the request to FE3. FE2 shall send the SS-BIC definition indication(s) to FE1(s), if requested by FE3 in the definition request;
- upon reception of an SS-BIC interrogation request from FE1 or FE3, FE2 shall send the interrogation response to FE1 or FE3 respectively;
- upon reception of an incoming basic or packet data service request to FE1, for which the SS-BIC restrictions apply, FE2 shall bar the request and inform FE5 about the barring.

The functional tasks of FE2 shall be the following in the visited system of the restricted identity:

- upon reception of an SS-BIC interrogation request from FE1 or FE3, FE2 shall send the interrogation response to FE1 or FE3 respectively, if the visited system knows the SS-BIC definition;
- upon reception of an incoming basic or packet data service request to FE1, for which the SS-BIC restrictions apply, FE2 shall bar the request and inform FE5 about the barring, if the visited system knows the SS-BIC definition;
- upon reception of an incoming basic or packet data service request to FE1, FE2 may send the service request to the home system and bar the call if indicated by the home system. FE2 shall inform FE5 about the barring of the service.

4.2.3 Authorized user's FE, FE3

The functional tasks of FE3 shall be the following:

- upon reception of an SS-BIC definition request from the user, FE3 shall send the request to the SwMI;
- upon reception of an SS-BIC definition acknowledgement from the SwMI, FE3 shall inform the user of the acknowledgement;
- upon reception of an SS-BIC interrogation request from the user, FE3 shall send the request to the SwMI;
- upon reception of an SS-BIC interrogation response from the SwMI, FE3 shall inform the user of the response.

4.2.4 SS-BIC FE2 in visited SwMI

The visited SwMI FE2 shall have perform the following tasks, refer EN 300 392-9 [5]:

- upon reception of an SS-BIC information flow over the ISI from home SwMI FE2 to FE1 or to FE3, the visited SwMI FE2 shall transport the flow to FE1 or to FE3 respectively;
- upon reception of an SS-BIC information flow from FE1 or from FE3 to home SwMI FE2, the visited SwMI FE2 shall transport the flow over the ISI to the home SwMI FE2.

4.2.5 Calling party's FE, FE5

Upon reception of a barred basic or packet data service from the SwMI, FE5 shall inform the user of the barring.