

SLOVENSKI STANDARD
SIST EN 300 394-4-6 V1.1.1:2003
01-december-2003

**Prizemni snopovni radio (TETRA) - Specifikacija za preskušanje skladnosti - 4. del:
Specifikacija za preskušanje protokola za neposredno obratovanje (DMO) - 6.
poddel: Abstraktni preskušalni niz (ATS) za neposredni ponavljajnik (repetitor)
(DM-REP) tipa 1**

Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 6: Abstract Test Suite (ATS) for Direct Mode Repeater (DM-REP) type 1

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 394-4-6 V1.1.1:2003](#)
<https://standards.iteh.ai/catalog/standards/sist/8588d1be-3cd5-4a13-816fb10cd83f83e1/sist-en-300-394-4-6-v1-1-1-2003>

Ta slovenski standard je istoveten z: EN 300 394-4-6 Version 1.1.1

ICS:

33.070.10	Prizemni snopovni radio (TETRA)	Terrestrial Trunked Radio (TETRA)
-----------	------------------------------------	--------------------------------------

SIST EN 300 394-4-6 V1.1.1:2003 en

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST EN 300 394-4-6 V1.1.1:2003](#)

<https://standards.iteh.ai/catalog/standards/sist/8588d1be-3cd5-4a13-816fb10cd83f83e1/sist-en-300-394-4-6-v1-1-1-2003>

ETSI EN 300 394-4-6 V1.1.1 (2001-01)

European Standard (Telecommunications series)

**Terrestrial Trunked Radio (TETRA);
Conformance testing specification;
Part 4: Protocol testing specification for
Direct Mode Operation (DMO);
Sub-part 6: Abstract Test Suite (ATS) for
Direct Mode Repeater (DM-REP) type 1**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 394-4-6 V1.1.1:2003](#)

<https://standards.iteh.ai/catalog/standards/sist/8588d1be-3cd5-4a13-816fb10cd83f83e1/sist-en-300-394-4-6-v1-1-1-2003>



Reference

DEN/TETRA-02009-4-6

KeywordsTETRA, DMO, protocol, testing, TTCN, ATS,
radio***ETSI***

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse 06 N° 7303/88**iTeh STANDARD PREVIEW**
(standards.iteh.ai)

[SIST EN 300 394-4-6 V1.1.1:2003](#)
<https://standards.iteh.ai/catalog/standards/sist/8588d1be-3cd5-4a13-816f-b10cd83f83e1/sist-en-300-394-4-6-v1-1-1-2003>

Important notice

Individual copies of the present document can be downloaded from:
<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword	5
1 Scope.....	6
2 References	6
3 Definitions and abbreviations.....	7
3.1 TETRA definitions.....	7
3.2 TETRA abbreviations.....	7
3.3 ISO 9646 definitions.....	7
3.4 ISO 9646 abbreviations	7
4 Abstract Test Method (ATM).....	8
4.1 Single PCO testing	8
4.1.1 Lower Tester (LT).....	8
4.1.2 Upper Tester (UT).....	8
4.1.3 Test Coordination Procedures (TCP)	8
4.1.4 Point of Control and Observation (PCO).....	9
4.2 Multiple PCO testing.....	9
4.2.1 Lower Testers (LT).....	9
4.2.2 Upper Tester (UT).....	9
4.2.3 Test Coordination Procedures (TCP)	9
4.2.4 Point of Control and Observation (PCO).....	9
4.3 Test configurations and use of concurrent TTCN	10
5 ATS conventions	11
5.1 Naming conventions.....	11
5.1.1 Declarations part.....	11
5.1.1.1 Test suite type and structured type definitions.....	11
5.1.1.2 Test suite operations definitions.....	11
5.1.1.3 Test suite parameter declarations.....	11
5.1.1.4 Test case selection expression definitions.....	11
5.1.1.5 Test suite constant declarations	12
5.1.1.6 Test suite variable declarations.....	12
5.1.1.7 Test case variable declarations	12
5.1.1.8 PCO declarations.....	12
5.1.1.9 Timer declarations	12
5.1.1.10 ASP type definitions	13
5.1.1.11 PDU type definitions	13
5.1.1.12 Alias definitions	13
5.1.2 Constraints part.....	13
5.1.3 Dynamic part	14
5.1.3.1 Test case identifier.....	14
5.1.3.2 Test step identifier	14
5.1.3.3 Default identifier	14
5.2 Implementation conventions	14
5.3 TC and TP naming	14

ITEH STANDARD PREVIEW
(standards.iteh.ai)

Annex A (normative):	ATS for DMO Repeater type 1 (DM-REP1) MAC layer.....	15
A.1	The TTCN Graphical form (TTCN.GR).....	15
A.2	The TTCN Machine Processable form (TTCN.MP)	15
Annex B (normative):	Partial PIXIT proforma for TETRA DMO Repeater type 1 MAC layer protocol.....	16
B.1	Identification summary	16
B.2	ATS summary	16
B.3	Test laboratory.....	16
B.4	Client identification	16
B.5	SUT.....	17
B.6	Protocol layer information	17
B.6.1	Protocol identification	17
B.6.2	IUT information	17
B.6.2.1	Implicit send events	17
B.6.2.2	Parameter values.....	17
Annex C (normative):	Protocol Conformance Test Report (PCTR) proforma for TETRA DMO Repeater type 1 MAC layer protocol	18
C.1	Identification summary	18
C.1.1	Protocol conformance test report.....	18
C.1.2	IUT identification.....	18
C.1.3	Testing environment.....	18
C.1.4	Limits and reservation	19
C.1.5	Comments.....	19
C.2	IUT conformance status.....	19
C.3	Static conformance summary.....	19
C.4	Dynamic conformance summary.....	19
C.5	Static conformance review report.....	20
C.6	Test campaign report	20
C.7	Observations.....	21
	History	22

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Project Terrestrial Trunked Radio (TETRA).

The present document had been submitted to Public Enquiry as ETS 300 394-4-6. During the processing for Vote it was converted into an EN.

The present document consists of the following parts:

Part 1: "Radio";

Part 2: "Protocol testing specification for Voice plus Data (V+D)";

Part 4: "Protocol testing specification for Direct Mode Operation (DMO)";

Part 5: "Security".

iTeh STANDARD REVIEW

(standards.iteh.ai)

SIST EN 300 394-4-6 V1.1.1:2003

<https://standards.iteh.ai/catalog/standards/sist/8588d1be-3cd5-4a13-816f-b10cd83f83e1/sist-en-300-394-4-6-v1-1-1-2003>

National transposition dates	
Date of adoption of this EN:	5 January 2001
Date of latest announcement of this EN (doa):	30 April 2001
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 October 2001
Date of withdrawal of any conflicting National Standard (dow):	31 October 2001

1 Scope

The present document contains the Abstract Test Suite (ATS) to test the TETRA Direct Mode Operation (DMO) Repeater type 1 (DM-REP1) protocol at layer 2, the Medium Access Control (MAC) protocol. The MAC protocol is specified in ETS 300 396-3 [1] and in EN 300 396-4 [2]. The Test Suite Structure (TSS) and Test Purposes (TPs) for this ATS are defined in EN 300 394-4-4 [4].

The objective of this test specification is to provide a basis for approval tests for TETRA equipment giving a high probability of air interface inter-operability between different manufacturer's TETRA equipment.

The ISO standard for the methodology of conformance testing, ISO/IEC 9646-1 [5], ISO/IEC 9646-2 [6], ISO/IEC 9646-3 [7] and ISO/IEC 9646-5 [8], as well as the ETSI rules for conformance testing, ETS 300 406 [9] and ETR 141 [10] are used as a basis for the test methodology.

Annex A provides the Tree and Tabular Combined Notation (TTCN) part of this ATS.

Annex B provides the partial Protocol Implementation eXtra Information for Testing (PIXIT) Proforma of this ATS.

Annex C provides the Protocol Conformance Test Report (PCTR) Proforma of this ATS.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

iTeh STANDARD PREVIEW (standards.iteh.ai)

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
 - For a specific reference, subsequent revisions do not apply.
 - For a non-specific reference, the latest version applies.
<https://standards.iteh.ai/catalog/standards/sist/8588d1be-3cd5-4a13-816fb10cd83f83e1/sist-en-300-394-4-6-v1-1-1-2003>
- [1] ETSI EN 300 396-3: "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 3: Mobile Station to Mobile Station (MS-MS) Air Interface (AI) protocol".
- [2] ETSI EN 300 396-4: "Radio Equipment and Systems (RES); Trans-European Trunked Radio (TETRA); Direct Mode (DM); Part 4: Type 1 Repeater Air Interface".
- [3] ETSI EN 300 396-8-2: "Radio Equipment and Systems (RES); Trans-European Trunked RAdio (TETRA); Direct Mode Operation (DMO); Part 8: Protocol Implementation Conformance Statement (PICS) proforma specification; Part 8-2: Type 1 repeater Air Interface".
- [4] ETSI EN 300 394-4-4: "Radio Equipment and Systems (RES); Trans-European Trunked RAdio (TETRA) system; Direct Mode Operation (DMO); Part 4: Protocol testing specification; Test Suite Structure and Test Purposes; Part 4-4 Repeater type 1 (DM REP1) Air Interface (AI)".
- [5] ISO/IEC 9646-1 (1994): "Information technology - Open Systems Interconnection - Conformance Testing Methodology and Framework - Part 1: General Concepts". (See also ITU-T Recommendation X.290 (1991)).
- [6] ISO/IEC 9646-2 (1994): "Information technology - Open Systems Interconnection - Conformance Testing Methodology and Framework - Part 2: Abstract Test Suite Specification". (See also ITU-T Recommendation X.291 (1991)).
- [7] ISO/IEC 9646-3 (1994): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 3: The tree and tabular combined notation". (See also ITU-T Recommendation X.292 (1992)).

- [8] ISO/IEC 9646-5 (1994): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 5: Requirements on test laboratories and clients for the conformance assessment process". (See also ITU-T Recommendation X.292 (1992)).
- [9] ETSI ETS 300 406: "Methods for Testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".
- [10] ETSI ETR 141: "Methods for Testing and Specification (MTS); Protocol and profile conformance testing specifications; The Tree and Tabular Combined Notation (TTCN) style guide".

3 Definitions and abbreviations

3.1 TETRA definitions

For the purposes of the present document, the terms and definitions given in EN 300 396-4 [2] apply.

3.2 TETRA abbreviations

For the purposes of the present document the following TETRA abbreviations apply:

DM-REP1	Direct Mode Repeater Type 1
MAC	Medium Access Control
MS	Mobile Station
SDS	Short Data Service
SDU	Service Data Unit

ITEH STANDARD PREVIEW
(standards.iteh.ai)

3.3 ISO 9646 definitions

SIST EN 300 394-4-6 V1.1.1:2003

For the purposes of the present document the following ISO/IEC 9646 definitions apply:
https://standards.iteh.ai/jtc1/st14/1/jt05811b_v3e15_4v13_816fb10cd83f83e1/sist-en-300-394-4-6-v1-1-1-2003

TTCN.GR	
TTCN.MP	
PCTR	Protocol Conformance Test Report (PCTR proforma)

3.4 ISO 9646 abbreviations

For the purposes of the present document the following ISO/IEC 9646-1 [5] abbreviations apply:

ASP	Abstract Service Primitive
ATM	Abstract Test Method
ATS	Abstract Test Suite
ICS	Implementation Conformance Statement
IUT	Implementation Under Test
IXIT	Implementation eXtra Information for Testing
LT	Lower Tester
PCO	Point of Control and Observation
PCTR	Protocol Conformance Test Report
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statements
PIXIT	Protocol Implementation eXtra Information for Testing
SAP	Service Access Point
SPyT	Single Party Testing
SUT	System Under Test
TC	Test Case
TP	Test Purpose
TSS	Test Suite Structure
TTCN	Tree and Tabular Combined Notation

UT Upper Tester

4 Abstract Test Method (ATM)

This clause describes the ATM used for testing the DM-REP1 MAC layer protocol. The selected method is the remote method, as defined in ISO/IEC 9646-2 [6], clause 11. This test method has been selected, because:

- this test method implies no specific requirements from the Implementation Under Test (IUT);
- the upper Service Access Point (SAP) of the IUT cannot be directly observed;
- the variety of the possible TETRA implementations is a serious technical obstacle for the adoption of a different ATM;
- this test method places minimum limitations in the realization of conformance testing.

The DM-REP1 MAC protocol defines the operation of a DM-REP1 serving two air interfaces, the master and the slave link. To test the repeater operation in some cases both interfaces need to be controlled and observed simultaneously. This implies that two testing methods are used: the remote single-party test method (with one PCO) and the remote multiparty test method with two PCOs.

4.1 Single PCO testing

The remote Single Party test method with a single PCO is illustrated in figure 1.

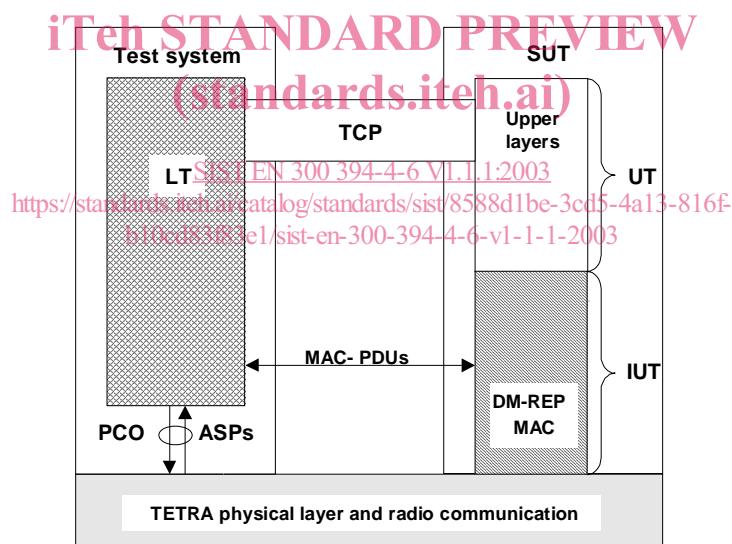


Figure 1: Remote SPyT test method for TETRA DM-REP1 MAC layer

4.1.1 Lower Tester (LT)

A LT is located in a remote TETRA test system. It controls and observes the behaviour of the IUT.

4.1.2 Upper Tester (UT)

There is no explicit UT in the remote test method, but the DM-REP1 MAC layer and the layers above inside the System Under Test (SUT) are used implicitly for testing the MAC layer.

4.1.3 Test Coordination Procedures (TCP)

The implicit send events defined by the provider of an implementation in annex B serve the purpose of the TCP. They are used as an input to the IUT communicating with the UT to initiate test events at the DMO MAC layer.

4.1.4 Point of Control and Observation (PCO)

All test events at the PCO carrying service user data are specified in terms of MAC layer PDUs. Only few Abstract Service Primitives (ASPs) are defined for control or observation purposes. The mapping of the MAC PDUs into the physical layer frame structure is left to the test implementation.

4.2 Multiple PCO testing

The selected test method is illustrated in figure 2.

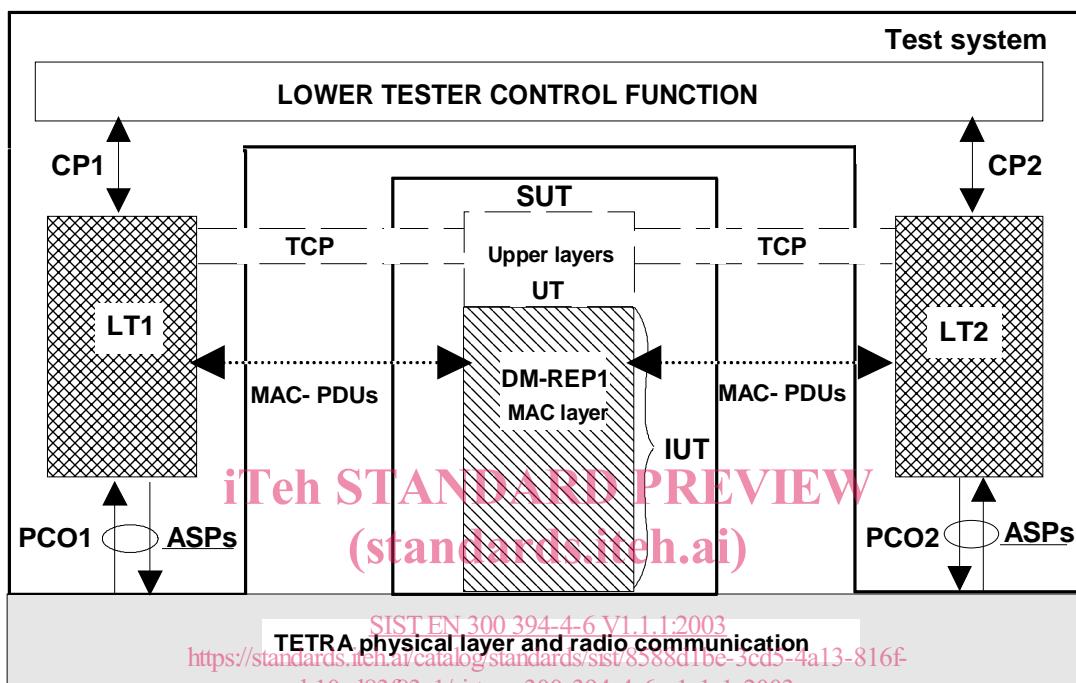


Figure 2: Remote multi party test method for TETRA DM-REP1 MAC protocol

4.2.1 Lower Testers (LT)

Two LTs: LT1 and LT2 are located in a remote TETRA test system. They observe the behaviour of the IUT. They are controlled and synchronized by the lower tester control function.

4.2.2 Upper Tester (UT)

There is no explicit UT in the remote test method, but the layers above inside the System Under Test (SUT) are used implicitly for testing the DM-REP1 MAC layer.

4.2.3 Test Coordination Procedures (TCP)

The implicit send events defined by the provider of an implementation in annex B serve the purpose of the TCP. They are used as an input to the IUT communicating with the UT to initiate test events at the MAC protocol layer.

4.2.4 Point of Control and Observation (PCO)

The PCOs are located inside the protocol.

All test events at the PCOs carrying service user data are specified in terms of MAC PDUs. The mapping of the PDUs to possible physical layer service primitives is left to the test implementation.