
International Standard



5752

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Metal valves for use in flanged pipe systems — Face-to-face and centre-to-face dimensions

Appareils de robinetterie métalliques utilisés dans les tuyauteries à brides — Dimensions face-à-face et face-à-axe

Second edition — 1982-06-01

ITeH STANDARD PREVIEW
(standards.iteh.ai)

[ISO 5752:1982](https://standards.iteh.ai/catalog/standards/sist/d481b728-8532-4b04-b119-e6ca41f0505b/iso-5752-1982)

<https://standards.iteh.ai/catalog/standards/sist/d481b728-8532-4b04-b119-e6ca41f0505b/iso-5752-1982>

UDC 621.646

Ref. No. ISO 5752-1982 (E)

Descriptors : piping, valves and fittings, industrial valves, cocks, pipe flanges, nomenclature, connecting dimensions.

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 5752 was developed by Technical Committee ISO 153, *Valves*.

The first edition (ISO 5752-1979) had been approved by the member bodies of the following countries :

| | | |
|----------------|-------------|----------------|
| Australia | Italy | Spain |
| Austria | Japan | Sweden |
| Canada | Mexico | Switzerland |
| Denmark | Netherlands | United Kingdom |
| Finland | Norway | USA |
| Germany, F. R. | Poland | |
| India | Romania | |

STANDARD PREVIEW
(standards.iteh.ai)

The member bodies of the following countries had expressed disapproval of the document on technical grounds

ISO 5752:1982

<http://standards.iteh.ai/catalog/standards/sist/d481b728-8532-4b04-b119-e6ca41f0505b/iso-5752-1982>
Belgium
France
South Africa, Rep. of
USSR

This second edition, which cancels and replaces ISO 5752-1979, incorporates draft Amendment 1, which was circulated to the member bodies in January 1981 and has been approved by the member bodies of the following countries :

| | | |
|---------------------|----------------|-----------------------|
| Australia | Germany, F. R. | Romania |
| Austria | India | South Africa, Rep. of |
| Belgium | Iraq | Sweden |
| Canada | Italy | Switzerland |
| Denmark | Japan | United Kingdom |
| Egypt, Arab Rep. of | Korea, Rep. of | USA |
| Finland | Netherlands | |
| France | Norway | |

The member body of the following country expressed disapproval of the document on technical grounds :

USSR

Metal valves for use in flanged pipe systems — Face-to-face and centre-to-face dimensions

0 Introduction

The object of this International Standard is the establishment of face-to-face and centre-to-face dimensions for metal valves to permit a degree of dimensional interchangeability. It is intended for use in preparing product standards for industrial valves.

Although the tables of face-to-face dimensions in this International Standard represent a considerable rationalization of international practices it has not been possible to reduce these to a single series of dimensions for the various types of valves. Alternatives have been included. For convenience these have been called short, medium and long, but these terms are not used in a purely descriptive sense.

The pressure/temperature ratings for the different types of valves are those to be specified in the valve product standards for the types of valve and materials used.

Where dimensions from inch series of valves have been converted into millimetres, the exact values obtained have been rounded to the whole millimetre below when the decimal value obtained in conversion has been less than 0,5 mm, and to whole millimetre above when the decimal value obtained in conversion has been equal to or greater than 0,5 mm.

Throughout this International Standard, nominal sizes DN 550 and DN 650 are shown in parenthesis to indicate non-preferred sizes.

1 Scope and field of application

1.1 This International Standard specifies the basic series of face-to-face or centre-to-face dimensions for two-way metal valves used in flanged pipe systems. Each basic series of face-to-face or centre-to-face dimensions may be used as required with flanges of mating dimensions conforming to ISO 2084 or ISO 2229.

1.2 The range of pressure ratings, in PN values, is

1 — 1,6 — 2,5 — 4 — 6 — 10 — 16 — 25 and 40.
and classes 125 — 150 — 250 — 300 and 600.

1.3 The range of nominal sizes, in DN values, is

10 — 15 — 20 — 25 — 32 — 40 — 50 — 65 — 80 — 100 —
125 — 150 — 200 — 250 — 300 — 350 — 400 — 450 —
500 — (550) — 600 — (650) — 700 — 750 — 800 — 900 —
1 000 — 1 200 — 1 400 — 1 600 — 1 800 and 2 000.

2 Definitions

2.1 nominal size (DN) : A numerical designation of size which is common to all components in a piping system other than components designated by outside diameters. It is a convenient round number for reference purposes and it is normally only loosely related to manufacturing dimensions.

It shall be designated by the letters DN, followed by a number.

2.2 nominal pressure : The nominal pressures in this International Standard follow one of two systems, the PN rating system or the class rating system.

2.3 face-to-face dimension (for straight pattern valves) : The distance, expressed in millimetres, between the two planes perpendicular to the valve axis located at the extremities of the body end ports or as may be specified in the relevant valve products standards.

The face-to-face dimension for butterfly valves is the distance between the extremities of the valve in the installed conditions.

2.4 centre-to-face dimension (for angle pattern valves) : The distance, expressed in millimetres, between the plane located at the extremity of either body end port and perpendicular to its axis and the other body end port axis.

3 Dimensions and tolerances


The basic series of face-to-face and centre-to-centre dimensions, expressed in millimetres, are given in table 1. The table is a summary of the dimensions in tables 2 to 10 giving the origin of each series, and should be referred to when consideration is given to the standardization of valve types not presently covered by this International Standard. Each particular column does not necessarily include all the valves of the relevant basic series.

The face-to-face or centre-to-face dimensions as appropriate for the types of valves included in this International Standard, shall be in accordance with table 2 for the isomorphic series and tables 3 to 10 for the isobaric series, and the tolerances shall be in accordance with table 11.


4 Terminology*

4.1 Gate valves

4.1.1 Wedge gate valve




4.1.2 Parallel slide gate valve




4.2 Butterfly valves

4.2.1 Wafer butterfly valve




4.2.2 Double-flanged butterfly valve




4.3 Plug and ball valves

4.3.1 Conical or cylindrical plug valve



4.3.2 Ball valve




iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 5752:1982

<https://standards.iteh.ai/catalog/standards/sist/d481b728-8532-4b04-b119-e6ca41f0505b/iso-5752-1982>


* The illustrations are intended to be a diagrammatic only and should not be used as symbols. They do not assume the principle or the construction details.

4.4 Diaphragm valves




4.5 Globe valves


4.5.1 Globe valve



4.5.2 Oblique type of globe valve




4.5.3 Globe type angle valve




4.6 Check (non-return) valves


4.6.1 Lift type check valve




4.6.2 Swing type check valve

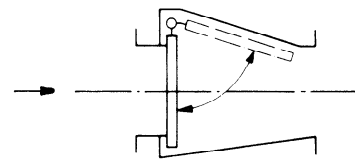

4.6.3 Lift type angle check valve



4.6.4 Non-return diaphragm valve

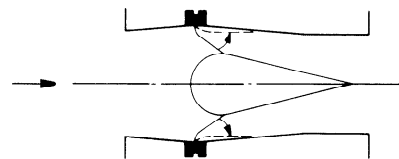

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 5752:1982
<https://standards.iteh.ai/catalog/standards/sist/d481b728-8532-4b04-b119-e6ca41f0505b/iso-5752-1982>

Table 1 — Face-to-face and centre-to-face dimensions — Basic series

| Nominal size (DN) | Basic series | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------|------------------------|------------|-------------|-------------|-------------|---|-----|--------------|--------------|--------------------|------------------|------------------|---------|-------------|-------------|---------|---------|---------|-------------|---------|-------------|----|----|-----|-------------|-----------|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8* | 9* | 10 | 11* | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24* | 25 | |
| | DIN 3202/F1 | DIN 3203/F | ANSI B16.10 | ANSI B16.10 | ANSI B16.10 | | | DIN 3202/F32 | DIN 3202/F33 | ANSI B16.10 15-150 | ANSI B16.10 1868 | ANSI B16.10 5353 | BS 5155 | DIN 3202/F4 | DIN 3202/F5 | API 609 | API 600 | BS 5154 | ANSI B16.10 | API 609 | ANSI B16.10 | | | | ANSI B16.10 | MSS SP 67 |
| | Origin of basic series | | | | | | | | | | | | | | | | | | | | | | | | | |
| | DN range | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 130 | 210 | 102 | — | — | | 108 | 85 | 105 | 15-150 | — | 130 | — | — | — | — | — | 80 | — | 40-600 | — | — | — | — | — | — |
| 15 | 130 | 210 | 108 | 140 | 165 | | 108 | 90 | 105 | 108 | 57 | 130 | — | — | — | — | 140 | 80 | 140 | — | — | — | — | — | — | 83 |
| 20 | 150 | 230 | 117 | 152 | 190 | | 117 | 96 | 115 | 117 | 64 | 130 | — | — | — | — | 152 | 90 | 152 | — | — | — | — | — | — | 95 |
| 25 | 160 | 230 | 127 | 165 | 216 | | 127 | 100 | 115 | 127 | 70 | 140 | — | — | — | — | 165 | 100 | 165 | — | — | — | — | — | — | 108 |
| 32 | 180 | 260 | 140 | 178 | 229 | | 146 | 105 | 130 | 140 | 76 | 165 | — | — | — | — | 178 | 110 | 178 | — | — | — | — | — | — | 114 |
| 40 | 200 | 260 | 165 | 190 | 241 | | 159 | 115 | 130 | 165 | 82 | 165 | 106 | 140 | 240 | | 190 | 120 | 190 | 33 | 241 | — | — | — | — | 121 |
| 50 | 230 | 300 | 178 | 216 | 292 | | 190 | 125 | 150 | 203 | 102 | 203 | 108 | 150 | 250 | | 216 | 135 | 216 | 43 | 267 | — | — | — | — | 146 |
| 65 | 290 | 340 | 190 | 241 | 330 | | 216 | 145 | 170 | 216 | 108 | 222 | 112 | 170 | 270 | | 241 | 165 | 241 | 46 | 292 | — | — | — | — | 165 |
| 80 | 310 | 380 | 203 | 283 | 356 | | 294 | 155 | 190 | 241 | 121 | 241 | 114 | 180 | 280 | | 283 | 185 | 283 | 46 | 318 | — | — | — | — | 178 |
| 100 | 350 | 430 | 229 | 305 | 432 | | 305 | 175 | 215 | 292 | 146 | 305 | 127 | 190 | 300 | | 305 | 305 | 305 | 52 | 356 | — | — | — | — | 216 |
| 125 | 400 | 500 | 254 | 381 | 508 | | 356 | 200 | 250 | 330 | 178 | 356 | 140 | 200 | 325 | | 381 | 400 | 381 | 56 | 400 | — | — | — | — | 254 |
| 150 | 480 | 550 | 267 | 403 | 559 | | 406 | 225 | 275 | 356 | 203 | 394 | 140 | 210 | 350 | | 403 | 403 | 56 | 444 | — | — | — | — | — | 279 |
| 200 | 600 | 650 | 292 | 419 | 660 | | 521 | 275 | 325 | 495 | 248 | 457 | 152 | 230 | 400 | | 502 | 419 | 60 | 533 | — | — | — | — | — | 330 |
| 250 | 730 | 775 | 330 | 457 | 787 | | 635 | 325 | 375 | 627 | 311 | 533 | 165 | 250 | 450 | | 568 | 457 | 68 | 622 | — | — | — | — | — | 394 |
| 300 | 850 | 900 | 356 | 502 | 838 | | 749 | 375 | 425 | 698 | 350 | 610 | 178 | 270 | 500 | | 648 | 502 | 78 | 711 | — | — | — | — | — | 419 |
| 350 | 980 | 1 025 | 381 | 762 | 889 | | | 425 | | 787 | 394 | 686 | 190 | 290 | 550 | | 572 | 572 | 78 | 838 | — | — | — | — | — | 92 |
| 400 | 1 100 | 1 150 | 406 | 838 | 991 | | | 475 | | 914 | 457 | 762 | 216 | 310 | 600 | | 838 | 610 | 102 | 864 | — | — | — | — | — | 102 |
| 450 | 1 200 | 1 275 | 432 | 914 | 1 092 | | | 500 | | 978 | 483 | 864 | 222 | 330 | 650 | | 914 | 660 | 114 | 978 | — | — | — | — | — | 114 |
| 500 | 1 250 | 1 400 | 457 | 991 | 1 194 | | | | | 978 | 978 | 914 | 229 | 350 | 700 | | 991 | 711 | 127 | 1 016 | — | — | — | — | — | 127 |
| (550) | 1 350 | — | 483 | 1 092 | 1 295 | | | | | 1 067 | 1 016 | 1 016 | — | — | 750 | | — | 749 | 154 | 1 118 | — | — | — | — | — | 154 |
| 600 | 1 450 | 1 650 | 508 | 1 143 | 1 397 | | | | | 1 295 | 1 067 | 1 067 | 267 | 390 | 800 | | 1 143 | 787 | 154 | 1 346 | — | — | — | — | — | 154 |
| (650) | 1 550 | — | 559 | 1 245 | 1 448 | | | | | 1 295 | — | — | 292 | 430 | 850 | | — | 850 | 165 | 1 346 | — | — | — | — | — | 165 |
| 700 | 1 650 | — | 610 | — | — | | | | | 1 448 | — | — | — | — | 900 | | — | 900 | 165 | 1 499 | — | — | — | — | — | 165 |
| 750 | 1 750 | — | 610 | 1 397 | 1 651 | | | | | 1 524 | — | — | — | — | 950 | | — | 950 | 190 | 1 594 | — | — | — | — | — | 190 |
| 800 | 1 850 | — | 660 | — | — | | | | | — | — | — | — | — | 1 000 | | — | 1 000 | 190 | — | — | — | — | — | — | — |
| 900 | 2 050 | — | 711 | — | — | | | | | 1 956 | — | — | — | — | 1 000 | | — | 1 000 | 203 | 2 083 | — | — | — | — | — | — |
| 1 000 | 2 250 | — | 811 | — | — | | | | | — | — | — | — | — | 1 100 | | — | 1 100 | 203 | — | — | — | — | — | — | — |
| 1 200 | — | — | — | — | — | | | | | — | — | — | — | — | 1 200 | | — | 1 200 | 216 | — | — | — | — | — | — | — |
| 1 400 | — | — | — | — | — | | | | | — | — | — | — | — | 1 300 | | — | 1 300 | 254 | — | — | — | — | — | — | — |
| 1 600 | — | — | — | — | — | | | | | — | — | — | — | — | 1 400 | | — | 1 400 | — | — | — | — | — | — | — | — |
| 1 800 | — | — | — | — | — | | | | | — | — | — | — | — | 1 500 | | — | 1 500 | — | — | — | — | — | — | — | — |
| 2 000 | — | — | — | — | — | | | | | — | — | — | — | — | 1 600 | | — | 1 600 | — | — | — | — | — | — | — | — |

* Centre-to-face dimensions for angle valves.

NOTE — Nominal sizes in parentheses are non-preferred.

Table 2 – Gate valves, isomorphic series

| Nominal size (DN) | Face-to-face dimensions | Maximum working pressure at 20 °C for lamellar graphite cast iron bar ¹⁾ |
|-------------------|-------------------------|---|
| 40 | 140 | 10 |
| 50 | 150 | |
| 65 | 170 | |
| 80 | 180 | |
| 100 | 190 | |
| 125 | 200 | |
| 150 | 210 | |
| 200 | 230 | 6 |
| 250 | 250 | |
| 300 | 270 | |
| 350 | 290 | 4 |
| 400 | 310 | |
| 450 | 330 | |
| 500 | 350 | |
| 600 | 390 | 2,5 |
| 700 | 430 | |
| 800 | 470 | 1,6 |
| 900 | 510 | 1 |
| 1 000 | 550 | |
| Basic series | 14 | — |

NOTE – “Isomorphic” is the name of a series of flow pressure gate valves of a specified shape, having, for each nominal size the minimum wall thickness meeting the foundry or manufacturing requirements (in contrast to “isobaric series”, i.e. having the same maximum operating pressure at a temperature of 20 °C). Since the maximum permissible pressure at a temperature of 20 °C in such a series decreases as the nominal size increases, the gate valves may only be used at the maximum permissible pressure at a temperature of 20 °C given in the above table, subject to the material of which the body and the bonnet is formed.

1) 1 bar = 10⁵ Pa

Table 3 — Gate valves

| Nominal size (DN) | Face-to-face dimensions | | | | | |
|-------------------|-------------------------|-------|--------------------|----------------------------|---------------------|-----------|
| | PN 10/16 Class 125/150 | | PN 25/40 Class 300 | Alternative for PN 25 only | Class 250 cast iron | Class 600 |
| | Short | Long | | | | |
| 10 | 102 | — | — | — | — | — |
| 15 | 108 | — | 140 | — | 140 | 165 |
| 20 | 117 | — | 152 | — | 152 | 190 |
| 25 | 127 | — | 165 | — | 165 | 216 |
| 32 | 140 | — | 178 | — | 178 | 229 |
| 40 | 165 | 240 | 190 | 240 | 190 | 241 |
| 50 | 178 | 250 | 216 | 250 | 216 | 292 |
| 65 | 190 | 270 | 241 | 270 | 241 | 330 |
| 80 | 203 | 280 | 283 | 280 | 283 | 356 |
| 100 | 229 | 300 | 305 | 300 | 305 | 432 |
| 125 | 254 | 325 | 381 | 325 | 381 | 508 |
| 150 | 267 | 350 | 403 | 350 | 403 | 559 |
| 200 | 292 | 400 | 419 | 400 | 419 | 660 |
| 250 | 330 | 450 | 457 | 450 | 457 | 787 |
| 300 | 356 | 500 | 502 | 500 | 502 | 838 |
| 350 | 381 | 550 | 762 | 550 | 572 | 889 |
| 400 | 406 | 600 | 838 | 600 | 610 | 991 |
| 450 | 432 | 650 | 914 | 650 | 660 | 1 092 |
| 500 | 457 | 700 | 991 | 700 | 711 | 1 194 |
| (550) | 483 | 750 | 1 092 | 750 | 749 | 1 295 |
| 600 | 508 | 800 | 1 143 | 800 | 787 | 1 397 |
| (650) | 559 | 850 | 1 245 | — | — | 1 448 |
| 700 | 610 | 900 | — | — | — | — |
| 750 | 610 | 950 | 1 397 | — | — | 1 651 |
| 800 | 660 | 1 000 | — | — | — | — |
| 900 | 711 | 1 100 | — | — | — | — |
| 1 000 | 811 | 1 200 | — | — | — | — |
| Basic series | 3 | 15 | 4 | 15 | 19 | 9 |

NOTE — Nominal sizes in parentheses are non-preferred.

Table 4 – Double-flanged butterfly valves and double-flanged butterfly check valves

| Nominal size (DN) | Face-to-face dimensions | |
|---------------------|---------------------------|---------------------------|
| | ≤ PN 16 and Class 125/150 | ≤ PN 25 and Class 125/150 |
| | short series | long series |
| 40 | 106 | 140 |
| 50 | 108 | 150 |
| 65 | 112 | 170 |
| 80 | 114 | 180 |
| 100 | 127 | 190 |
| 125 | 140 | 200 |
| 150 | 140 | 210 |
| 200 | 152 | 230 |
| 250 | 165 | 250 |
| 300 | 178 | 270 |
| 350 | 190 | 290 |
| 400 | 216 | 310 |
| 450 | 222 | 330 |
| 500 | 229 | 350 |
| 600 | 267 | 390 |
| 700 | 292 | 430 |
| 800 | 318 | 470 |
| 900 | 330 | 510 |
| 1 000 | 410 | 550 |
| 1 200 | 470 | 630 |
| 1 400 | 530 | 710 |
| 1 600 | 600 | 790 |
| 1 800 | 670 | 870 |
| 2 000 | 760 | 950 |
| Basic series | 13 | 14 |

NOTE — ≤ means equal to or less than.

Table 5 – Wafer butterfly valves and wafer butterfly check valves

| Nominal size (DN) | Face-to-face dimensions | | |
|---------------------|---------------------------|--------|------|
| | ≤ PN 16 and class 125/150 | | |
| | short | medium | long |
| 40 | 33 | — | 33 |
| 50 | 43 | — | 43 |
| 65 | 46 | — | 46 |
| 80 | 46 | 49 | 64 |
| 100 | 52 | 56 | 64 |
| 125 | 56 | 64 | 70 |
| 150 | 56 | 70 | 76 |
| 200 | 60 | 71 | 89 |
| 250 | 68 | 76 | 114 |
| 300 | 78 | 83 | 114 |
| 350 | 78 | 92 | 127 |
| 400 | 102 | 102 | 140 |
| 450 | 114 | 114 | 152 |
| 500 | 127 | 127 | 152 |
| (550) | 154 | — | 170 |
| 600 | 154 | 154 | 178 |
| (650) | 165 | — | 210 |
| 700 | 165 | — | 229 |
| 750 | 190 | — | 230 |
| 800 | 190 | — | 241 |
| 900 | 203 | — | 241 |
| 1 000 | 216 | — | 300 |
| 1 200 | 254 | — | 350 |
| 1 400 | — | — | 390 |
| 1 600 | — | — | 440 |
| 1 800 | — | — | 490 |
| 2 000 | — | — | 540 |
| Basic series | 20 | 25 | 16 |

NOTES

- 1 ≤ means equal to or less than.
- 2 Nominal sizes in parentheses are non-preferred.