

SLOVENSKI STANDARD SIST EN 12814-3:2000

01-december-2000

Preskus zvarjenih spojev plastomernih polizdelkov - 3. del: Preskus lezenja pri natezni obremenitvi

Testing of welded joints of thermoplastics semi-finished products - Part 3: Tensile creep test

Prüfen von Schweißverbindungen aus thermoplastischen Kunststoffen - Teil 3: Zeitstand -Zugversuch iTeh STANDARD PREVIEW

Essais des assemblages soudés sur produits semi-finis en thermoplastiques - Partie 3: Essai de fluage

https://standards.iteh.ai/catalog/standards/sist/cf5cf7f9-ac70-4bd9-a1a2-

Ta slovenski standard je istoveten z: EN 12814-3-2000

ICS:

25.160.40 Varjeni spoji in vari Welded joints

SIST EN 12814-3:2000 en SIST EN 12814-3:2000

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST EN 12814-3:2000</u> https://standards.iteh.ai/catalog/standards/sist/cf5cf7f9-ac70-4bd9-a1a2-c2d3f5e624c9/sist-en-12814-3-2000

EUROPEAN STANDARD NORME EUROPÉENNE EUROPÄISCHE NORM

EN 12814-3

January 2000

ICS 25.160.40

English version

Testing of welded joints of thermoplastics semi-finished products - Part 3: Tensile creep test

Essais des assemblages soudés sur produits semi-finis en thermoplastiques - Partie 3: Essai de fluage

Prüfen von Schweißverbindungen aus thermoplastischen Kunststoffen - Teil 3: Zeitstand-Zugversuch

This European Standard was approved by CEN on 15 November 1999.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

<u>SIST EN 12814-3:2000</u> https://standards.iteh.ai/catalog/standards/sist/cf5cf7f9-ac70-4bd9-a1a2-c2d3f5e624c9/sist-en-12814-3-2000



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Contents

	Page
Foreword	3
Introduction	4
1 Scope	4
2 Normative references	
3 Terms and definitions	
4 Symbols and designations	
5 Principle of the test	
6 Sampling procedures	
7 Dimensions of test specimens	7
8 Cutting and preparation of test specimens	11
9 Mechanical testing	. 11
10 Test equipment	12
11 Determination of the long term welding factor	
12 Test report	14
12 Test report	16
Annex B (informative) Minimum creep rupture time of the parent material (t _{tm}) for applicability of the long term welding factor	
22425-624-0/sixt on 12014-2-2000	

c2d3f5e624c9/sist-en-12814-3-2000

100000

Page 3 EN 12814-3:2000

Foreword

This European Standard has been prepared by Technical Committee CEN/TC 249 "Plastics", the secretariat of which is held by IBN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by July 2000, and conflicting national standards shall be withdrawn at the latest by July 2000.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST EN 12814-3:2000</u> https://standards.iteh.ai/catalog/standards/sist/cf5cf7f9-ac70-4bd9-a1a2-c2d3f5e624c9/sist-en-12814-3-2000 Page 4 EN 12814-3:2000

Introduction

The design of welded thermoplastics constructions under static load is based on the long term creep rupture with behaviour, specifically the resistance to slow crack growth of the thermoplastics material and the welds.

For design purposes the relevant characteristic values for the welded joints are the "long term tensile welding factors" to which this standard provides the test method.

The long term tensile welding factors are normally used in conjunction with the creep rupture curve of the parent material, given for example in EN 1778, when designing welded semi-finished products under static load.

The long term tensile welding factor(s), the crack behaviour and the appearance of the fracture surface provide information on the quality of the weld.

NOTE The behaviour of the failure obtained during the tensile creep test can be related to the notch sensitivity of the parent material. An example of a test to provide information about the notch sensitivity of parent material is given in annex A.

1 Scope

This standard specifies the dimensions, the method of sampling and the preparation of the test specimens, and the conditions for performing the tensile creep test perpendicular to the weld in order to determine the long term tensile welding factor.

A tensile creep test may be used in conjunction with other tests (e.g. bend test, tensile test, macrographic examination...) to assess the performance of welded assemblies, made from thermoplastics materials.

The test is applicable to welded assemblies made from thermoplastics materials filled or unfilled such as tubes and fittings, sheets, plates and profiles, but not reinforced, irrespective of the welding process used.

2 Normative references SIST EN 12814-3:2000 https://standards.iteh.ai/catalog/standards/sist/cf5cf7f9-ac70-4bd9-a1a2-

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

ISO 899-1, Plastics - Determination of creep behaviour - Part 1: Tensile creep

EN 1778, Characteristic values for welded thermoplastics constructions — Determination of allowable stresses and moduli for design of thermoplastics equipment

EN 13100-1 ,Non destructive testing of welded joints of thermoplastics semi-finished products — Part 1: Visual examination

3 Terms and definitions

For the purposes of this standard, the following definitions apply:

3.1

test temperature

temperature of the medium surrounding the test specimen during the test

3.2

test stress

test load divided by the minimum cross sectional area of the test specimen

3.3

creep rupture curve

regression curve through the geometric mean values of failure times

34

minimum failure time t_{tm}

creep rupture time of the parent material to ensure that the test method is applicable

3.5

ductile fracture

large scale deformation of material from fracture surfaces

3.6

brittle fracture

iTeh STANDARD PREVIEW

little or no deformation of material from fracture surfaces (standards.iteh.ai)

SIST EN 12814-3:2000

https://standards.iteh.ai/catalog/standards/sist/cf5cf7f9-ac70-4bd9-a1a2-c2d3f5e624c9/sist-en-12814-3-2000

4 Symbols and designations

Symbols and designations are given in table 1.

Table 1 — Symbols and designations

Symbols	Designations	Units
а	Minimum measured thickness of test specimen within calibrated and parallel length	millimetre
a _n	Nominal thickness of test piece	millimetre
b	Width of calibrated and parallel length of the test specimen	millimetre
<i>b</i> ₁	Width of shoulder of the test specimen	millimetre
С	Depth of the notch	millimetre
D_{n}	Nominal outside diameter of the tube	millimetre
4	The long term tensile welding factor.	
F _s	The value of the force applied to the welded test specimen calculated from the chosen value of $\sigma_{\rm s}$	Newton
F _t	The value of the force applied to the unweided test specimen calculated from the chosen value of σ _f	Newton
L	Total length of the test specimen 2814-3-2000	millimetre
L _j	Minimum distance between the clamping jaws	millimetre
L _o	Calibrated and parallel length of the test specimen	millimetre
L _w a)	Maximum width of the weld bead of the test specimen	millimetre
r	Radius of shoulder of the test specimen	millimetre
t im	Minimum failure time	hour
σs	The value of stress of the welded test specimens used in the calculation of f	N/mm²
σ _t	The reference stress. The value of stress of the unwelded test specimens, used in the calculation of f	N/mm ²
) For extrusion and hot gas welds only.		

5 Principle of the test

The test involves subjecting a test specimen to a constant load until fracture occurs. The time to fracture is measured and recorded.

The tests are carried out over a range of temperatures and loads, and in a test medium. Only such media shall be used which cause no swelling or degradation of the polymer. Examples of available test media are air, water or solutions of demineralized water with detergents.

Page 7 EN 12814-3:2000

The applicability of the long term tensile welding factor for design purposes requires a minimum creep rupture time for the parent material ($t_{\rm m}$). Before determining the long term welding factor for the materials mentioned in annex B, a tensile creep test should be carried out on the parent material at one of the test conditions given in table B.1. The values of creep rupture time should be at least that quoted in table B.1.

NOTE Application standards may prescribe higher values for these rupture times depending upon the semi-finished product and material.

6 Sampling procedures

Welded and unwelded test specimens shall be taken from the same test piece.

The test specimens (welded and unwelded) shall be cut perpendicular to the welded joint at least eight hours after welding. For sheets where the extrusion direction is different on either side of the weld, the unwelded test specimens shall be taken from the side of the test piece which has the lowest creep rupture time.

Each test specimen shall be marked in order to identify its original position within the test piece.

No heat treatment or mechanical straightening operations shall be carried out on the test specimen.


7 Dimensions of test specimens

The dimensions of test specimens according to figure 1 are given in table 2 and those according to figure 2 are given in table 3.

Profiles can be tested if test specimens are in accordance with the dimensions given in table 2 or table 3.


For tubes having nominal outside diameter less than 20 mm the whole tube shall be tested. In this case, the minimum distance between the clamps shall be 200 mm.

<u>SIST EN 12814-3:2000</u> https://standards.iteh.ai/catalog/standards/sist/cf5cf7f9-ac70-4bd9-a1a2c2d3f5e624c9/sist-en-12814-3-2000

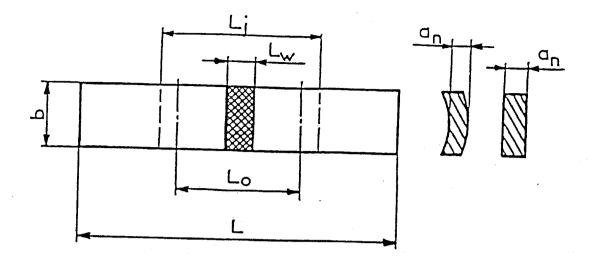



<u>SIST EN 12814-3:2000</u> https://standards.iteh.ai/catalog/standards/sist/cf5cf7f9-ac70-4bd9-a1a2-c2d3f5e624c9/sist-en-12814-3-2000




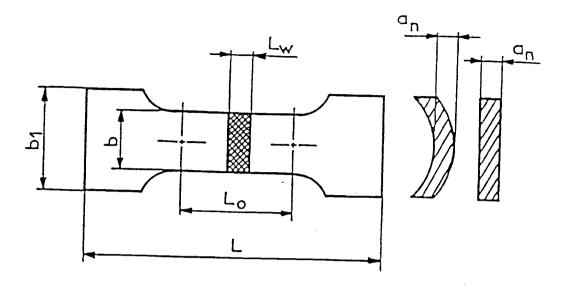


Figure 1 — Type 1 test specimen for flat and tubular assemblies

For type 1 test specimen $L_j = L_0 + 2xb$.





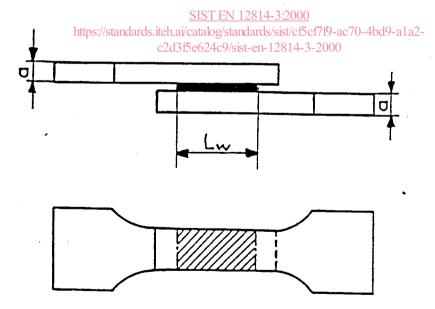


Figure 2 — Type 2 test specimen for flat and tubular assemblies