



IEC 60062

Edition 5.0 2004-11

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Marking codes for resistors and capacitors

Codes de marquage des résistances et des condensateurs

IEC 60062:2004

<https://standards.iteh.ai/api/log/standards/ic/3c8583d5-16b0-46d5-8c09-72e4aff48a72/iec-60062-2004>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2004 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Marking codes for resistors and capacitors

Codes de marquage des résistances et des condensateurs

IEC 60062:2004

<https://standards.iteh.ai/api/log/standards/icc/3c8583d5-16b0-46d5-8c09-72e4aff48a72/iec-60062-2004>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

P

ICS 31.020

ISBN 978-2-83220-770-3

Warning! Make sure that you obtained this publication from an authorized distributor.

Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references	5
3 Colour code for fixed resistors	5
4 Letter and digit code for resistance and capacitance values	7
5 Letter code for tolerance and temperature coefficient on resistance and capacitance values	11
6 Date code system for capacitors and resistors.....	12
7 Code letter (index) for the dielectric material of plastic film and paper capacitors	15
 Table 1 – Values corresponding to colours.....	6
Table 2a – Examples of code marking for resistance values – max. 3 significant digits	8
Table 2b – Examples of code marking for resistance values – 4 significant digits.....	8
Table 3 – Examples of code marking in the three-character code system.....	9
Table 4 – Examples of code marking in the four-character code system.....	9
Table 5a – Examples of code marking for capacitance values – max. 3 significant digits	10
Table 5b – Examples of code marking for capacitance values – 4 significant digits	10
Table 6 – Letter code for symmetrical tolerances (per cent)	11
Table 7 – Letter code for asymmetrical tolerances (per cent)	11
Table 8 – Letter code for symmetrical tolerances (fixed values)	11
Table 9 – Letter code for temperature coefficient of resistance (TCR).....	12
Table 10a – ‘Year’ in the two-character code (20-year cycle)	13
Table 10b – ‘Month’ in the two-character code (20-year cycle).....	13
Table 11a – ‘Year’ in the two-character code (10-year cycle)	13
Table 11b – ‘Month’ in the two-character code (10-year cycle).....	14
Table 12 – One-character code – 4-year cycle	15
Table 13 – Letter corresponding to dielectric of plastic film material.....	15

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**MARKING CODES FOR RESISTORS
AND CAPACITORS****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60062 has been prepared by IEC technical committee 40: Capacitors and resistors for electronic equipment.

This fifth edition cancels and replaces the fourth edition published in 1992 and its amendment 1 (1995) and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) completion of the existing code systems for
 - resistors with a three-character code system and a four-character code system;
 - temperature coefficient of resistance with a letter code system;
 - data code system for capacitors and resistors with the 10-year cycle code (two-character code), the 20-year cycle code (four-digit code), the 10-year cycle code (four-digit code), and a one-character code – four-year cycle.
- b) extension with a code letter system for the dielectric material of plastic film and paper capacitors.

This bilingual version (2013-05) corresponds to the monolingual English version, published in 2004-11.

The text of this standard is based on the following documents:

FDIS	Report on voting
40/1465/FDIS	40/1486/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under <http://webstore.iec.ch> in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

<https://standards.iteh.ai/catalog/standards/icc/3c8583d5-16b0-46d5-8c09-72e4aff48a72/iec-60062-2004>

MARKING CODES FOR RESISTORS AND CAPACITORS

1 Scope

This International Standard specifies marking codes for resistors and capacitors and indexes for the dielectric material and the electrodes of plastic film and paper capacitors.

The code specified in Clause 3 gives a colour coding for fixed resistors.

It is intended for use with the values of the E6 to E192 series as specified in IEC 60063.

The code specified in Clause 4 gives a system for marking resistance and capacitance values by means of letters and digits.

The code specified in Clause 5 gives a system for marking the tolerance on resistance and capacitance values by means of a letter.

The code specified in Clause 6 gives systems for marking the date codes on capacitors and resistors by means of letters and digits.

The code (index) specified in Clause 7 gives a coding system for the dielectric material.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60063:1963, *Preferred number series of resistors and capacitors*

ISO 1043-1:2001, *Plastics – Symbols and abbreviated terms – Part 1: Basic polymers and their special characteristics*

ISO 8601:2000, *Data elements and interchange formats – Information interchange – Representation of dates and times*

3 Colour code for fixed resistors

3.1 The colour code for indicating resistance values to two and three significant figures, tolerances and, if needed, the indication of the temperature coefficient of fixed resistors shall be as given in 3.2, 3.3 and 3.4.

3.2 The first band shall be the one nearest to the end of the resistor and the bands shall be so placed and spaced that there can be no confusion in reading the coding.

3.3 Any additional coding shall be so applied as not to confuse the coding for value and tolerance.

3.4 Colour code marking for fixed resistors

Table 1 – Values corresponding to colours

Colour	Significant figures	Multiplier	Tolerance	Temperature coefficient $10^{-6}/K$
Silver	-	10^{-2}	$\pm 10\%$	-
Gold	-	10^{-1}	$\pm 5\%$	-
Black	0	1	-	± 250
Brown	1	10	$\pm 1\%$	± 100
Red	2	10^2	$\pm 2\%$	± 50
Orange	3	10^3	$\pm 0,05\%$	± 15
Yellow	4	10^4	-	± 25
Green	5	10^5	$\pm 0,5\%$	± 20
Blue	6	10^6	$\pm 0,25\%$	± 10
Violet	7	10^7	$\pm 0,1\%$	± 5
Grey	8	10^8	-	± 1
White	9	10^9	-	-
None	-	-	$\pm 20\%$	-

For the indication of temperature coefficients according to the code as described above one of the following methods shall be used:

- a) a colour band as the sixth and wider band;
- b) an interrupted colour band as the sixth band;
- c) a helix.


For cylindrical types, the helix shall be superimposed on the full length of the existing bands of colour code indicating the resistance value and tolerance, with the helix covering not less than 270° of the circumference.

For other types, similar methods of colour coding should be used as described in the detail specification.

Colour-code marking of the temperature coefficient shall only be used in combination with three significant figures.


3.4.1 Example of colour-code marking for resistance values with two significant figures

Resistor of $27\ 000\ \Omega$ with a tolerance of $\pm 5\%$.

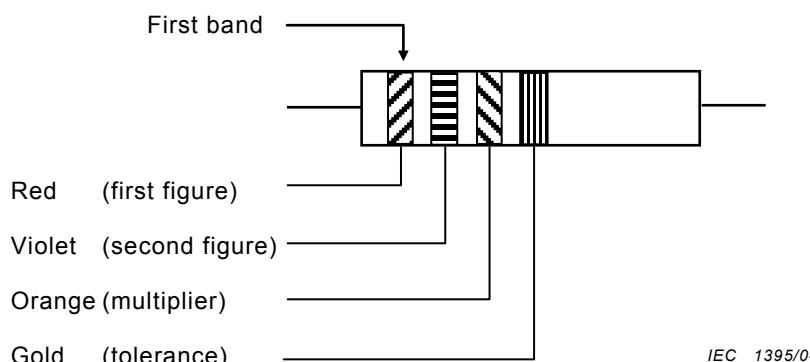

3.4.2 Example of colour-code marking for resistance values with three significant figures


Resistor of $249\ 000\ \Omega$ with a tolerance of $\pm 1\ %$.

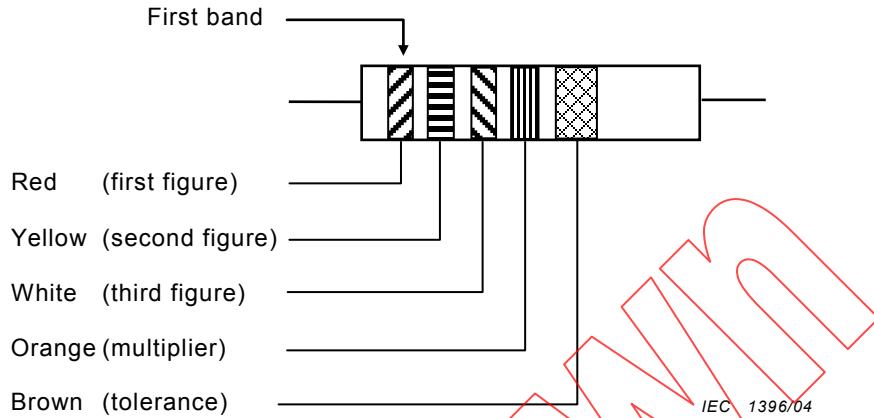

NOTE In order to avoid any confusion, the last band shall be 1,5 to 2 times wider than the other bands.

3.4.3 Example of colour-code marking for resistance values with three significant figures and temperature coefficient

Resistor of $249\ 000\ \Omega$ with a tolerance of $\pm 1\ %$ and a temperature coefficient of $\pm 50 \times 10^{-6}/K$.

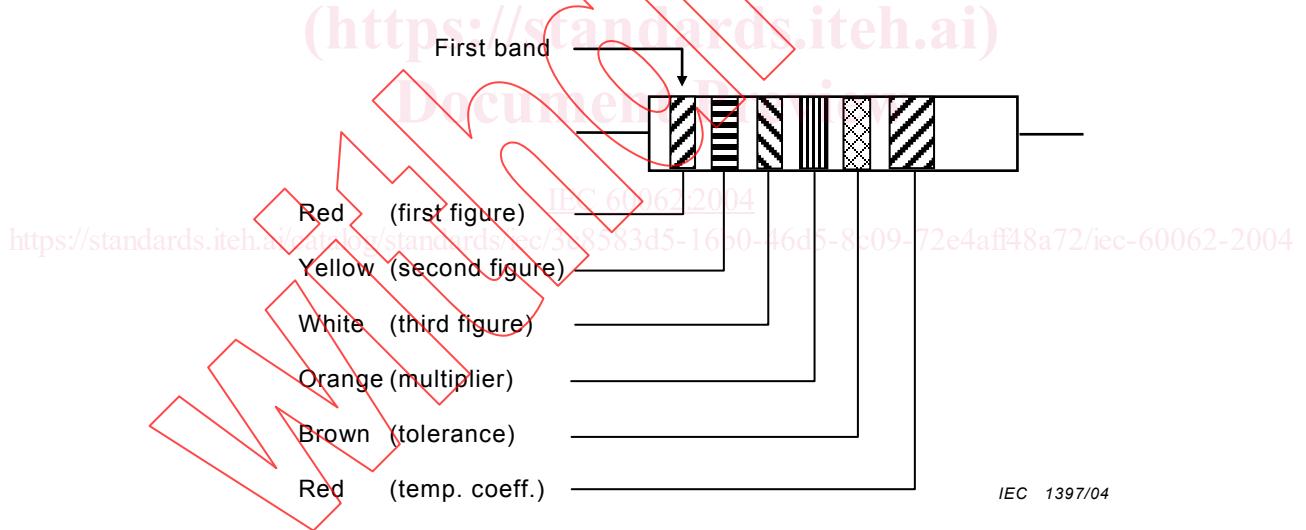

NOTE In order to avoid any confusion, the last band should be 1,5 to 2 times wider than the other bands.

4 Letter and digit code for resistance and capacitance values

4.1 General rules

4.1.1 The code shall use 3, 4 or 5 characters consisting of 2 figures and a letter, 3 figures and a letter, or 4 figures and a letter, as required.

4.1.2 The code letters replace the decimal point as shown in the examples in Tables 2 and 3.

4.1.3 Any additional code letter or digit shall appear after the tolerance letter specified in Clause 5 and shall be so applied as not to confuse the coding for value and tolerance.

4.2 Resistors

4.2.1 The RKM_G code system

The letters R, K, M, G and T are used as multipliers for 1, 10^3 , 10^6 , 10^9 and 10^{12} , respectively, of the resistance value expressed in ohms.

Table 2a – Examples of code marking for resistance values – max. 3 significant digits

Resistance values	Coded marking	Resistance values	Coded marking
0,1 Ω	R10	1 MΩ	1M0
0,15 Ω	R15	1,5 MΩ	1M5
0,332 Ω	R332	3,32 MΩ	3M32
0,590 Ω	R59	5,90 MΩ	5M9
1 Ω	1R0	10 MΩ	10M
1,5 Ω	1R5	15 MΩ	15M
3,32 Ω	3R32	33,2 MΩ	33M2
5,90 Ω	5R9	59,0 MΩ	59M
10 Ω	10R	100 MΩ	100M
15 Ω	15R	150 MΩ	150M
33,2 Ω	33R2	332 MΩ	332M
59,0 Ω	59R	590 MΩ	590M
100 Ω	100R	1 GΩ	1G0
150 Ω	150R	1,5 GΩ	1G5
332 Ω	332R	3,32 GΩ	3G32
590 Ω	590R	5,90 GΩ	5G9
1 kΩ	1K0	10 GΩ	10G
1,5 kΩ	1K5	15 GΩ	15G
3,32 kΩ	3K32	33,2 GΩ	33G2
5,90 kΩ	5K9	59,0 GΩ	59G
10 kΩ	10K	100 GΩ	100G
15 kΩ	15K	150 GΩ	150G
33,2 kΩ	33K2	332 GΩ	332G
59,0 kΩ	59K	590 GΩ	590G
100 kΩ	100K	1 TΩ	1T0
150 kΩ	150K	1,5 TΩ	1T5
332 kΩ	332K	3,32 TΩ	3T32
590 kΩ	590K	5,90 TΩ	5T9
		10 TΩ	10T

<https://standards.iteh.ai/Downloads/IEC-60062-2004>

NOTE Resistance values expressed by four significant digits should in this code system have code markings as in the examples shown below.

Table 2b – Examples of code marking for resistance values – 4 significant digits

Value	Coded marking
59,04 Ω	59R04
590,4 Ω	590R4
5,904 kΩ	5K904
59,04 kΩ	59K04 etc.

4.2.2 The three-character code system

The resistance value expressed in ohms is identified by a three-character code as in the examples shown below.

Table 3 – Examples of code marking in the three-character code system

Resistance values	Coded marking	Resistance values	Coded marking
0,1 Ω	R10	10 Ω	100
0,47 Ω	R47	15 Ω	150
1,0 Ω	1R0	100 Ω	101
1,5 Ω	1R5	150 Ω	151
2,0 Ω	2R0	1,0 kΩ	102
4,7 Ω	4R7	1,5 kΩ	152
		100 kΩ	104
		150 kΩ	154
		1 MΩ	105

4.2.3 The four-character code system

The resistance value expressed in ohms is identified by a four-character code as in the examples shown below.

Table 4 – Examples of code marking in the four-character code system

Resistance values	Coded marking
0,1 Ω to 0,976 Ω	R100 to R976
1 Ω to 9,76 Ω	1R00 to 9R76
10 Ω to 97,6 Ω	10R0 to 97R6
100 Ω to 976 Ω	1000 to 9760
1 kΩ to 9,76 kΩ	1001 to 9761
10 kΩ to 97,6 kΩ	1002 to 9762