

# INTERNATIONAL STANDARD

**ISO**  
**6370-1**

First edition  
1991-12-01

---

---

**Vitreous and porcelain enamels —  
Determination of the resistance to abrasion —  
Part 1:  
Abrasion testing apparatus**

*Émaux vitrifiés — Détermination de la résistance à l'abrasion —  
Partie 1: Appareillage d'essai d'abrasion*



Reference number  
ISO 6370-1:1991(E)

ISO 6370-1:1991  
https://standards.iteh.ai/catalog/standards/sist/15704-8c9e-4ec4-b31f-1cd1374074/iso-6370-1-1991  
iTeH STANDARD PREVIEW  
(standards.iteh.ai)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 6370-1 was prepared by Technical Committee ISO/TC 107, *Metallic and other inorganic coatings*, Sub-Committee SC 6, *Vitreous and porcelain enamels*.

ISO 6370 consists of the following parts, under the general title *Vitreous and porcelain enamels — Determination of the resistance to abrasion*:

- Part 1: *Abrasion testing apparatus*
- Part 2: *Loss in mass after sub-surface abrasion*

© ISO 1991

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

# Vitreous and porcelain enamels — Determination of the resistance to abrasion —

## Part 1: Abrasion testing apparatus

### 1 Scope

This part of ISO 6370 specifies the requirements for the testing apparatus to be used for the determination of the resistance to abrasion of vitreous and porcelain enamel coatings.

### 2 General description

The abrasion testing apparatus is composed essentially of the parts described in 3.1 to 3.4.

Figure 1 shows the arrangement of the specimens and reference glass plates in the apparatus.

### 3 Requirements

#### 3.1 Oscillating table with drive

An oscillating table of about 10 mm in thickness, made of steel or light metal, is placed horizontally on an eccentric drive in such a way that during the test every point of the oscillating table describes a horizontal circle of  $22 \text{ mm} \pm 1 \text{ mm}$  in diameter. The oscillating table shall be large enough for testing at least three specimens and clamping three reference plates on it by means of the retaining rings (3.2).

The eccentric drive shall operate at a rotational frequency of  $300 \text{ min}^{-1} \pm 3 \text{ min}^{-1}$  and be provided with a device for checking this frequency.

#### 3.2 Retaining rings


At least six retaining rings as shown in figure 2 are required for the testing apparatus. The retaining ring shall be constructed of steel, cast iron or light metal lined with rubber. The opening is used for introducing the abrading charge and shall be able to be closed by a rubber stopper.

#### 3.3 Sealing rings

At least six sealing rings of  $87 \text{ mm} \pm 0,5 \text{ mm}$  internal diameter,  $10 \text{ mm} \pm 2 \text{ mm}$  breadth and  $2 \text{ mm} \pm 0,5 \text{ mm}$  thickness, consisting of a non-rigid elastic material (e.g. rubber), are required on the testing apparatus.

#### 3.4 Clamping devices

The clamping device shall press the lower edge of the retaining ring (3.2) against the sealing ring (3.3) which retains the specimen or the reference glass plate on the oscillating table (see 3.1). It shall be possible to loosen the clamping devices quickly for easy exchange of specimens and reference glass plates.

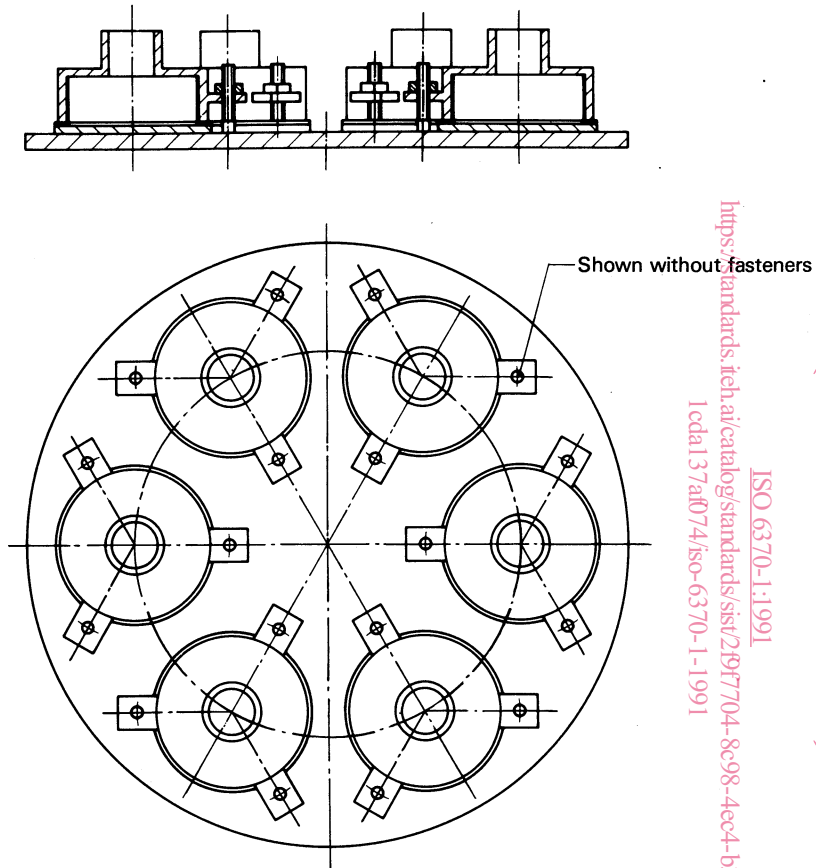


<https://standards.iteh.ai/catalog/standards/sist/21917704-8c98-4ec4-b31b-1cd137af074/iso-6370-1-1991>  
ISO 6370-1:1991

ITeH STANDARD PREVIEW  
(standards.iteh.ai)

Figure 1 — Arrangement of the specimens and reference glass plates in the abrasion testing apparatus

Dimensions in millimetres

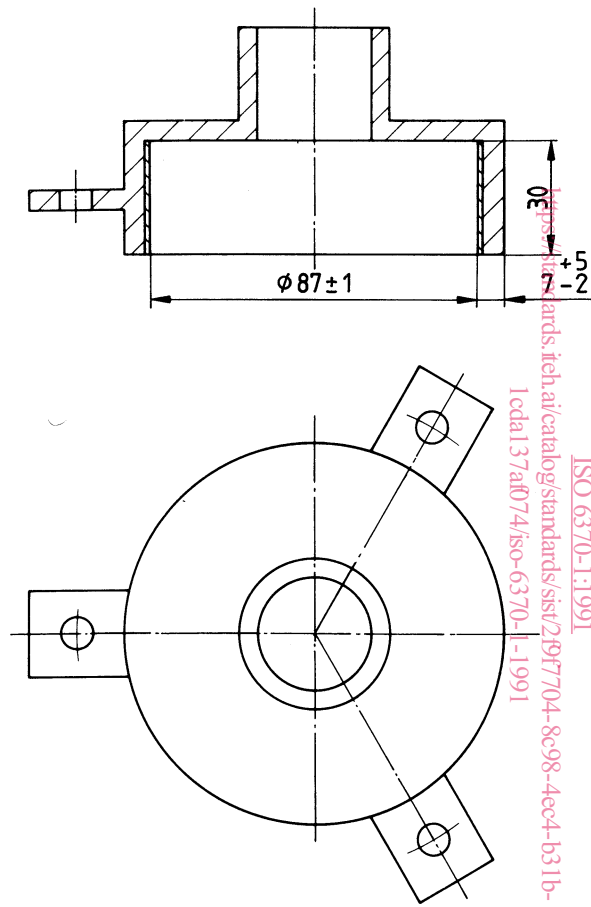

iteh STANDARD PREVIEW  
(standards.iteh.ai)

Figure 2 — Retaining ring

# **ITeH STANDARD PREVIEW**

## **(standards.iteh.ai)**

ISO 6370-1:1991

<https://standards.iteh.ai/catalog/standards/sist/21917704-8c98-4ec4-b31b-1cd137af074/iso-6370-1-1991>

This page intentionally left blank

# **ITeH STANDARD PREVIEW**

## **(standards.iteh.ai)**

ISO 6370-1:1991

<https://standards.iteh.ai/catalog/standards/sist/21917704-8c98-4ec4-b31b-1cd137af074/iso-6370-1-1991>

This page intentionally left blank

**ITeH STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 6370-1:1991

<https://standards.iteh.ai/catalog/standards/sist/21917704-8c98-4ec4-b31b-1cd137af074/iso-6370-1-1991>

---

---

**UDC 666.293:620.178.16.05**

**Descriptors:** coatings, non metallic coatings, ceramic coatings, vitreous enamels, tests, abrasion tests, determination, abrasion resistance, test equipment.

Price based on 3 pages

---

---