



SLOVENSKI STANDARD
SIST ETS 300 328 E1:2005

01-februar-2005

F U X] ' g _ U c d f Y a U] b ' g] g h Y a] ' f 9 G L E ' ü] f c _ c d U g c j b] ' d f Y b c g b] ' g] g h Y a] ' ! ' H M b] b Y
_ U F U h Y f] g h _ Y] b ' d f Y g _ i y U b] d c [c ' n U c d f Y a c ' n U d f Y b c g ' d c X U h _ c j ž _] ' X Y i ' Y j
Z Y _ j Y b b Y a ' d U g i ' & ž ; < n ' G A] b ' i d c f U V ' U a c X i ' U W ' g _ c ' h M b] _ c ' n ' f U n d f y Y b] a
g d Y _ f c a

Radio Equipment and Systems (RES); Wideband transmission systems; Technical characteristics and test conditions for data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques

ITeH STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 328 E1:2005](https://standards.iteh.ai/catalog/standards/sist/238af175-f5db-440a-b1f7-211f6d5ab8f7/sist-ets-300-328-e1-2005)

<https://standards.iteh.ai/catalog/standards/sist/238af175-f5db-440a-b1f7-211f6d5ab8f7/sist-ets-300-328-e1-2005>

Ta slovenski standard je istoveten z: ETS 300 328 Edition 1

ICS:

33.060.20	Sprejemna in oddajna oprema	Receiving and transmitting equipment
-----------	-----------------------------	--------------------------------------

SIST ETS 300 328 E1:2005

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ETS 300 328 E1:2005

<https://standards.iteh.ai/catalog/standards/sist/238af175-f5db-440a-b1f7-211f6d5ab8f7/sist-ets-300-328-e1-2005>



EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 328

November 1994

Source: ETSI TC-RES

Reference: DE/RES-02-09

ICS: 33.060.20

Key words: Land mobile radio, data transmission, wideband, spread spectrum, type testing

Radio Equipment and Systems (RES)
Wideband data transmission systems
Technical characteristics and test conditions
for data transmission equipment
operating in the 2,4 Ghz ISM band and using
spread spectrum modulation techniques

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1994. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 328 E1:2005](https://standards.iteh.ai/catalog/standards/sist/238af175-f5db-440a-b1f7-211f6d5ab8f7/sist-ets-300-328-e1-2005)

<https://standards.iteh.ai/catalog/standards/sist/238af175-f5db-440a-b1f7-211f6d5ab8f7/sist-ets-300-328-e1-2005>

Contents

Foreword.....	5
Introduction.....	5
1 Scope.....	7
2 Normative references.....	8
3 Definitions and abbreviations.....	8
3.1 Definitions.....	8
3.2 Abbreviations.....	9
4 General.....	10
4.1 Manufacturer declarations.....	10
4.2 Presentation of equipment for type testing.....	10
4.2.1 Choice of model.....	10
4.2.2 Presentation.....	11
4.2.3 Choice of operating frequencies.....	11
4.3 Design.....	11
4.3.1 General.....	11
4.3.2 Controls.....	11
4.4 Marking.....	11
4.5 Interpretation of the measurement results.....	11
5 Technical characteristics.....	11
5.1 Modulation.....	11
5.1.1 FHSS modulation.....	12
5.1.2 DSSS and other forms of modulation.....	12
5.2 Transmitter parameter limits.....	12
5.2.1 Frequency range.....	12
5.2.2 Effective radiated power.....	12
5.2.3 Peak power density.....	12
5.2.4 Spurious emissions.....	13
5.3 Receiver parameter limits.....	14
5.3.1 General.....	14
5.3.2 Spurious emissions.....	14
6 Test conditions.....	14
6.1 Normal and extreme test conditions.....	14
6.2 Power sources.....	14
6.2.1 Power sources for stand-alone equipment.....	14
6.2.2 Power sources for plug-in radio devices.....	15
6.3 Normal test conditions.....	15
6.3.1 Normal temperature and humidity.....	15
6.3.2 Normal power source.....	15
6.3.2.1 Mains voltage.....	15
6.3.2.2 Regulated lead-acid battery power sources used on vehicles.....	15
6.3.2.3 Other power sources.....	15
6.4 Extreme test conditions.....	16
6.4.1 Extreme temperatures.....	16
6.4.2 Extreme power source voltages.....	16
6.4.2.1 Mains voltage.....	16

	6.4.2.2	Regulated lead-acid battery power sources used on vehicles.....	16
	6.4.2.3	Power sources using other types of batteries.....	16
	6.4.2.4	Other power sources	16
	6.4.3	Procedure for tests at extreme temperatures	17
	6.4.3.1	Procedure for equipment designed for continuous operation.....	17
	6.4.3.2	Procedure for equipment designed for intermittent operation.....	17
6.5		Testing of host connected equipment and plug-in radio devices.....	17
	6.5.1	Alternative A: combined equipment	17
	6.5.2	Alternative B: use of a test jig and three hosts	17
6.6		Test data sequence.....	18
7		Methods of measurement.....	19
	7.1	General.....	19
	7.2	Measurements of transmitter parameters.....	19
	7.2.1	Frequency range of equipment using FHSS modulation.....	19
	7.2.2	Frequency range of equipment using other forms of modulation.....	20
	7.2.3	Effective radiated power	20
	7.2.4	Peak power density.....	22
	7.2.5	Spurious emissions.....	23
	7.3	Measurements of receiver parameters.....	24
	7.3.1	General	24
	7.3.2	Spurious emissions.....	24
8		Measurement uncertainty values.....	25
Annex A (normative):		Test sites and arrangements for radiated measurements	26
A.1		Test sites.....	26
	A.1.1	Open air test sites.....	26
	A.1.2	Anechoic chamber.....	27
	A.1.2.1	General	27
	A.1.2.2	Description.....	27
	A.1.2.3	Influence of parasitic reflections.....	27
	A.1.2.4	Calibration and mode of use.....	27
A.2		Test antenna.....	30
A.3		Substitution antenna.....	30
A.4		Informative references	30
Annex B (normative):		General description of measurement methods.....	31
B.1		Conducted measurements and use of test fixture	31
B.2		Radiated measurements	31
B.3		Substitution measurement	32
History		33

Foreword

This European Telecommunication Standard (ETS) has been prepared by the Radio Equipment and Systems (RES) Technical Committee of the European Telecommunications Standards Institute (ETSI).

Annex A provides additional information concerning radiated measurements.

Annex B contains normative specifications for the adjustment of the measurement equipment and of the equipment to be measured in order to achieve correct results.

Transposition dates	
Date of latest announcement of this ETS (doa):	28 February 1995
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 August 1995
Date of withdrawal of any conflicting National Standard (dow):	31 August 1995

Introduction

Wideband radio data transmission systems are rapidly being introduced into a variety of commercial and industrial applications and the technology employed by these systems is still developing.

This ETS may be used by accredited test laboratories for the assessment of the performance of the equipment. The performance of the equipment submitted for type testing should be representative for the performance of the corresponding production model. In order to avoid any ambiguity in that assessment, this ETS contains instructions for the presentation of equipment for type testing purposes (clause 4), testing conditions (clause 6) and methods of measurement (clause 7).

This ETS assumes that:

- the type test measurements performed in an accredited test laboratory in one CEPT country would be accepted by the Type Approval Authority in another country provided that the national regulatory requirements are met (see CEPT Recommendation T/R 71-03 [3]);
- if equipment available on the market is required to be checked it would be tested in accordance with the methods of measurement specified in this ETS.

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 328 E1:2005](https://standards.iteh.ai/catalog/standards/sist/238af175-f5db-440a-b1f7-211f6d5ab8f7/sist-ets-300-328-e1-2005)

<https://standards.iteh.ai/catalog/standards/sist/238af175-f5db-440a-b1f7-211f6d5ab8f7/sist-ets-300-328-e1-2005>

1 Scope

This European Telecommunication Standard (ETS) covers equipment referred to in CEPT Recommendation T/R 10-01 [1]. This ETS covers the minimum technical characteristics for radio data transmission equipment having the following technical parameters:

- wideband radio modulation techniques;
- aggregate bit rates in excess of 250 kbits/s;
- operation in the 2,4 to 2,4835 GHz Industrial, Scientific and Medical (ISM) band;
- effective radiated power of up to - 10 dBW (100 mW);
- power density of up to - 10 dBW (100 mW) per 100 kHz for frequency hopping modulation;
- power density of up to - 20 dBW (10 mW) per 1 MHz for other forms of spread spectrum modulation.

This ETS only addresses the transceivers, transmitters and receivers of equipment offered for testing.

The equipment offered for testing may be used in fixed, mobile or portable applications, e.g.:

- stand-alone radio equipment with or without their own control provisions;
- combined radio equipment where the radio part is fully integrated within other types of equipment;
- plug-in radio devices intended for use with a variety of host systems, e.g. personal computers.

The equipment may be fitted with integral antennas and/or antenna connectors.

CEPT Recommendation T/R 10-01 [1] defines the total power and power density limits for systems using spread spectrum modulation together with a minimum aggregate bit rate of 250 kbits/s. The Recommendation does not address the details of these modulation techniques. Therefore, this ETS does not cover the design or operation of the equipment being tested but describes a common set of measurements to be applied to various types of such equipment, including those employing Frequency Hopping Spread Spectrum (FHSS) modulation and Direct Sequence Spread Spectrum (DSSS) modulation.

CEPT Recommendation T/R 10-01 [1] specifies that spread spectrum modulation be used and it gives power density values for FHSS and DSSS modulation. This ETS specifies the minimum technical parameters of FHSS modulation such that it can be clearly differentiated from other types of modulation, including DSSS modulation.

CEPT Recommendation T/R 01-04 [2] defines limits of spurious emissions for a variety of radio equipment; these limits are used in this ETS as appropriate.

This ETS describes measurements for operating frequency range(s), effective radiated power and power density as well as spurious emissions for transmitters and receivers.

The measurement methods have been adapted from ETR 027 [4] where possible.

This ETS specifies test site characteristics, test conditions, equipment calibration and methods of measurement.

This ETS is a general standard which may be superseded by specific standards covering specific applications.

Additional standards or specifications may be required for equipment such as that intended for connection to the Public Switched Telephone Network (PSTN) and/or other Public Data Networks (PDN).

2 Normative references

This ETS incorporates provisions from other publications. These normative references are cited at the appropriate places in the text and the publications listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] CEPT Recommendation T/R 10-01: "Wideband Data Transmission in the 2,4 GHz to 2,5 GHz ISM band".
- [2] CEPT Recommendation T/R 01-04: "Low Power Devices".
- [3] CEPT Recommendation T/R 71-03: "Procedures for Type Testing and Approval for Radio Equipment intended for non-public systems".
- [4] ETR 027: "Radio Equipment and Systems; Methods of measurement for mobile radio equipment".
- [5] ETR 028: "Radio Equipment and Systems; Uncertainties in the measurement of mobile radio equipment characteristics".
- [6] EN 55022: "Limits and methods of measurement of radio interference characteristics of information technology equipment".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of this ETS the following definitions apply:

aggregate bit rate: The bit rate at the air interface (see point D in figure 1) including protocol overhead where applicable and excluding the effects of signal spreading.

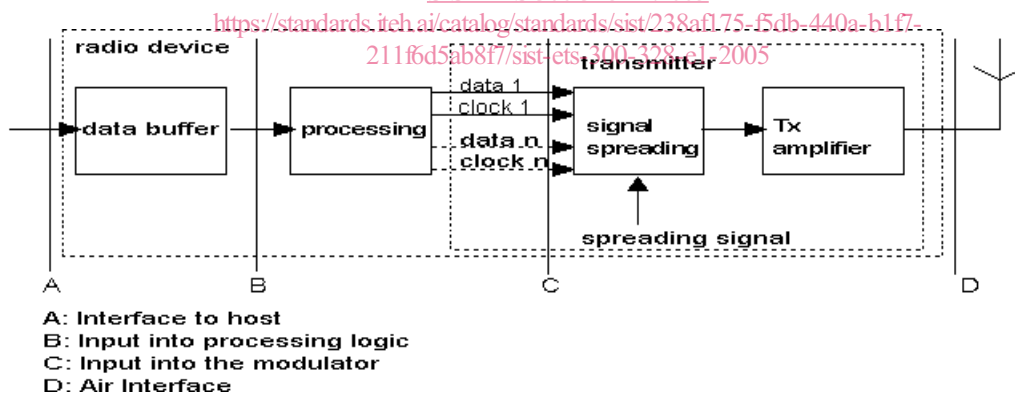


Figure 1: Parameters related to the aggregate bit rate

chip: A unit of modulation used in direct sequence spread spectrum modulation.

chip rate: The number of chips per second.

chip sequence: A sequence of chips with defined length and defined chip polarities.

Direct Sequence Spread Spectrum (DSSS) modulation: A form of modulation where a combination of data to be transmitted and a known code sequence (chip sequence) is used to directly modulate a carrier, e.g. by phase shift keying. The transmitted bandwidth is determined by the chip rate and the modulation scheme.

fixed station: Equipment intended for use in a fixed location and fitted with one or more antennas. The equipment may be fitted with either antenna socket(s) or integral antenna(s) or both.

Frequency Hopping Spread Spectrum (FHSS) modulation: A spread spectrum technique in which the transmitter signal occupies a number of frequencies in time, each for some period of time, referred to as the dwell time. Transmitter and receiver follow the same frequency hop pattern. The frequency range is determined by the lowest and highest hop positions and the bandwidth per hop position (see subclause 5.2.1).

frequency range: The range of operating frequencies over which equipment can be adjusted.

hand-portable station: Equipment normally used on a stand-alone basis and to be carried by a person or held in the hand. The equipment may be fitted with one, or more antennas. The equipment may be fitted with either antenna socket(s), or integral antenna(s), or both.

host: Host equipment is any equipment which has complete user functionality when not connected to the radio equipment part and to which the radio equipment part provides additional functionality and to which connection is necessary for the radio equipment part to offer functionality.

integral antenna: An antenna designed to be connected to the equipment without the use of a standard 50 ohm connector and considered to be part of the equipment. An integral antenna may be fitted internally or externally to the equipment.

manufacturer: "Manufacturer" is understood to refer to the manufacturer, or applicant of equipment offered for testing.

mobile station: Equipment normally used in a vehicle or as a transportable station. The equipment may be fitted with one, or more antennas. The equipment may be fitted with either antenna socket(s), or integral antenna(s), or both.

operating frequency: The nominal frequency at which equipment is operated; this is also referred to as the operating centre frequency. Equipment may be adjustable for operation at more than one operating frequency.

plug-in radio device: Equipment intended to be used within a host, using its housing, control functions and power supply.

power envelope: The frequency/power contour within which the useful RF power is generated.

spread spectrum modulation: A modulation technique in which the energy of a transmitted signal is spread throughout a relatively large portion of the frequency spectrum.

stand-alone equipment: Equipment that is normally used on a stand-alone basis and that includes the radio unit and normally but not necessarily control logic and/or power supply contained within its housing.

3.2 Abbreviations

For the purposes of this ETS the following abbreviations apply:

ac	alternating current
dBW	dB relative to 1 Watt power
dBm	dB relative to 1 milliWatt power
DSSS	Direct Sequence Spread Spectrum
eirp	equivalent isotropically radiated power
FHSS	Frequency Hopping Spread Spectrum
ISM	Industrial, Scientific and Medical
ITE	Information Technology Equipment
RF	Radio Frequency
Rx	Receiver
Tx	Transmitter

4 General

4.1 Manufacturer declarations

The manufacturer shall declare the following specific characteristics of the equipment:

- a) the aggregate bit rate (see subclause 3.1 for the definition);
- b) the type of modulation used: FHSS modulation, DSSS modulation or any other type of spread spectrum modulation (see subclause 5.1);
- c) where applicable, the duty cycle of the transmitter (Tx on/(Tx on + Tx off)) as well as the Tx on and Tx off times);
- d) where FHSS modulation is used: the number of hopping channels, the dwell time per channel and the maximum time between two instances of use of the same channel; these values shall fall within the specifications given in subclause 5.1.1;
- e) the operating frequency range(s) of the equipment and, where applicable, band(s) of operation (see subclause 5.2.1);
- f) the type of the equipment, for example: stand-alone or plug-in radio device (see subclause 3.1). For plug-in radio devices the applicable types of host should be declared as well (see also subclause 6.5);
- g) the extreme operating conditions that apply to the equipment offered for testing;
- h) the gain of the antenna assembly(ies) intended for normal use, i.e. the transfer function between the conducted RF power and eirp;
- i) the nominal ac/dc power voltages of the radio equipment.

Where the equipment to be tested can be equipped with one or more antennas, the manufacturer shall declare and provide for testing the antenna(s) with the equipment; all of these antennas shall be included in the radiated measurements described in this ETS. The characteristics of the antenna assembly(ies) intended for normal use as specified by the manufacturer will be included in the user documentation supplied with the equipment.

4.2 Presentation of equipment for type testing

4.2.1 Choice of model

The manufacturer shall offer one or more production models or equivalent preliminary models, as appropriate, for type testing. If type approval is given on the basis of tests on (a) preliminary model(s), then the corresponding production models shall be identical to the tested models in all respects relevant for the purposes of this ETS, except, where applicable, for the antenna.

Due to the low levels of RF signal and the wideband modulations used in this type of equipment, radiated RF power measurements are imprecise. Conducted measurements are much more precise; in combination with the declared antenna assembly gain(s) adequate assurance of the RF characteristics can be achieved. Therefore, equipment offered for testing shall provide a 50 ohm connector for conducted RF power measurements. Where this is not possible, the manufacturer shall provide a documented test fixture that converts the radiated signal into a conducted signal into a 50 ohm termination. Alternatively, radiated measurements shall be performed.

Where manufacturers submit equipment with an integral antenna only, two sets of equipment shall be provided, one set fitted with an RF test connector and one set fitted with the integral antenna.