



SLOVENSKI STANDARD
DSIST I-ETS 300 131:1999
01-oktober-1999

Radijska oprema in sistemi (RES) - Specifikacija skupnega radijskega vmesnika, ki se uporablja za medsebojno delovanje brezvrvičnih telefonskih aparatov v frekvenčnem pasu od 864,1 MHz do 868,1 MHz vključno s storitvami javnega dostopa

Radio Equipment and Systems (RES); Common air interface specification to be used for the interworking between cordless telephone apparatus in the frequency band 864,1 MHz to 868,1 MHz, including public access services


Ta slovenski standard je istoveten z: I-ETS 300 131 Edition 2

ICS:

33.060.20	Sprejemna in oddajna oprema	Receiving and transmitting equipment
-----------	-----------------------------	--------------------------------------

DSIST I-ETS 300 131:1999

en

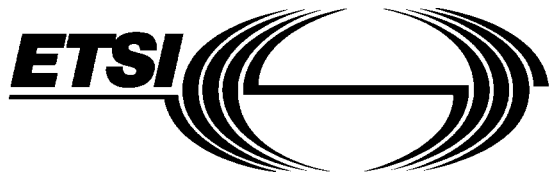

EUROPEAN
TELECOMMUNICATION
STANDARD

I-ETS 300 131

November 1994

Second Edition

Source: ETSI TC-RES

Reference: RI/RES-03015

ICS: 33.060.20

Key words: CT2, CAI

**Radio Equipment and Systems (RES);
Common air interface specification to be used for
the interworking between cordless telephone apparatus
in the frequency band 864,1 Mhz to 868,1 MHz,
including public access services**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

Some of the material contained herein is the copyright of, or has been supplied by, the United Kingdom Department of Trade and Industry, the British Standards Institution and the companies listed in annex H.

© European Telecommunications Standards Institute 1994. All rights reserved.

Contents

Foreword	15
Introduction	15
1 Scope	17
2 Normative references	18
3 Definitions and abbreviations	19
3.1 Definitions.....	19
3.2 Abbreviations.....	20
4 Radio frequency interface	24
4.1 General.....	24
4.2 Channel frequencies	24
4.2.1 Channel centre frequencies	24
4.2.2 Channel frequency accuracy.....	24
4.2.3 Rate of change of transmit centre frequency	25
4.2.4 CTA access.....	25
4.3 Signalling strategy.....	25
4.3.1 CTA access.....	25
4.3.2 Signalling whilst in the communication state	25
4.3.3 Signalling outside the communication state	25
4.4 Dynamic channel allocation strategy	25
4.4.1 Incoming calls	25
4.4.2 Outgoing calls	25
4.4.3 Channel selection strategies.....	26
4.4.4 Free channel.....	26
4.4.4.1 Free channel selection for primary services	26
4.4.4.2 Free channel selection for secondary services	26
4.5 Radio transmitters.....	27
4.5.1 RF power	27
4.5.1.1 Maximum RF power.....	27
4.5.1.2 Minimum RF power.....	27
4.5.1.3 Output power at low power setting	27
4.5.2 Modulation.....	27
4.5.3 Adaptive transmitter power strategy	27
4.5.3.1 General	27
4.5.3.2 CPP only.....	27
4.5.3.3 CPP and CFP.....	27
4.5.3.4 Power level changes.....	28
4.5.4 Transmitter burst envelope.....	28
4.5.4.1 Amplitude.....	28
4.5.4.2 Dispersion effects.....	28
4.5.4.3 Guard time.....	28
4.5.4.4 Synchronisation of transmitter burst envelopes.....	29
4.5.5 Adjacent channel power (narrow band)	29
4.5.6 Out of band power arising from transmitter transients	29
4.5.7 Intermodulation attenuation	29
4.6 Radio receivers.....	29
4.6.1 General	29
4.6.1.1 CTA including three or more RFPs.....	29
4.6.1.2 Other CTAs.....	29
4.6.1.3 CTAs without integral or supplied antenna	29

4.6.2	Sensitivity	30
4.6.2.1	Receiver sensitivity for CFP or CPP using an integral or supplied antenna.....	30
4.6.2.2	Receiver sensitivity with a 50 ohm connector.....	30
4.6.3	Interference rejection.....	30
4.6.3.1	Unmodulated interfering carrier signal.....	30
4.6.3.2	Modulated asynchronous interfering signal	31
4.6.4	Blocking due to spurious responses	31
4.6.5	Intermodulation response rejection.....	32
4.7	Combined radio transmitter/receivers.....	32
4.7.1	Adverse power supply conditions.....	32
4.7.2	Spurious emissions of the combined transmitter/receiver	32
4.8	Termination of the communication state.....	33
4.8.1	Clear down signal sequence.....	33
4.8.2	Cessation of RF activity	33
4.8.3	Off-line timing.....	33
4.9	Channel scanning	33
4.9.1	Available channels	33
4.9.2	Response times	33
4.9.2.1	Outgoing	33
4.9.2.2	Incoming	33
4.10	In-communication channel switching	33
4.10.1	Capability.....	33
4.10.2	Channel change delay	34
4.11	Controls.....	34
4.12	Synthesisers and PLL systems.....	34
5	Signalling layer one.....	34
5.1	Data structure and timing	35
5.1.1	Data rate	35
5.1.2	Time-division duplexing.....	35
5.1.3	Master-slave relationship	35
5.2	Sub-channel multiplexes	36
5.2.1	Channel Markers (CHM) and synchronism markers (SYNC).....	36
5.2.2	Multiplex one	37
5.2.3	Multiplex two	38
5.2.4	Multiplex three.....	38
5.3	Calling channel detection.....	40
5.3.1	Calling channel detection at the CPP	40
5.3.2	Calling channel detection at the CFP	41
5.4	Link set up and establishment.....	41
5.4.1	Link set up from CFP to CPP	42
5.4.2	Link set up from CPP to CFP	42
5.4.3	Set up collision resolution	43
5.4.4	Link re-establishment on the existing channel	43
5.4.4.1	Action at the CPP	44
5.4.4.2	Action at the CFP	44
5.4.5	Link re-establishment on a re-selected channel.....	44
5.4.5.1	At the CPP.....	44
5.4.5.2	At the CFP	45
5.4.6	Synchronous re-establishment	45
5.4.6.1	Action at the CFP	46
5.4.6.2	Action at the CPP	47
5.5	ID handshaking	47
5.5.1	General	47
5.5.1.1	Handshake code series	47
5.5.1.2	Code allocation.....	47
5.5.1.3	Code matching	48
5.5.1.4	Code recognition.....	48
5.5.1.5	Communication state.....	48

	5.5.1.6	Lack of in-communication handshake: RF activity	48
	5.5.1.7	Lack of in-communication handshake: off-line state	48
	5.5.2	ID handshake operation	48
	5.5.3	Handshake protocol.....	48
	5.5.4	Reception of valid handshakes	49
	5.5.5	ID handshake mechanism	49
6	Signalling layer two.....		50
	6.1	Code word usage.....	50
	6.2	General message format	51
	6.3	General packet format.....	51
	6.3.1	Order of transmission and field mapping convention	51
	6.3.2	IDLE_D	52
	6.3.3	Synchronisation word (SYNCD).....	52
	6.3.4	Code Words - (address and data code words).....	52
	6.3.5	Code word transmission sequence	53
	6.3.6	Check field encoding (octets 7 and 8)	53
	6.4	Fixed length packet format (FT = 0).....	53
	6.4.1	SR (octet 1 (part)).....	54
	6.4.2	LS (octet 1 (part))	54
	6.4.3	HIC (octets 1 (part), 2, 3)	55
	6.4.4	MIC (octet 4)	55
	6.4.5	LID (octets 5 and 6)	55
	6.4.5.1	Allocation of LID values	56
	6.4.5.2	Link set up from the CPP: LID use by the CPP in LINK_REQUEST	57
	6.4.5.3	Link set up from the CPP: LID use by the CFP in LINK_GRANT.....	57
	6.4.5.4	Polling of CPPs (including link set up from the CFP): LID use by the CFP in ID_OK.....	57
	6.4.5.5	CPP poll response : LID use by the CPP in ID_OK.....	58
	6.4.5.6	Link set up from the CFP: LID use by the CPP in LINK_REQUEST	58
	6.4.5.7	Link set up from the CFP: LID use by the CFP in LINK_GRANT.....	58
	6.4.5.8	Established or re-established link: LID use by the CPP in ID_OK and ID_LOST.....	58
	6.4.5.9	Established or re-established link: LID use by the CFP in ID_OK and ID_LOST.....	58
	6.4.5.10	Link re-establishment: LID use by the CPP in LINK_REQUEST	58
	6.4.5.11	Link re-establishment: LID use by the CFP in LINK_GRANT.....	58
	6.4.5.12	Validity of handshakes	59
	6.4.6	CFP Identity and Status Code Word (CIS)	59
	6.5	Variable length packet format (FT = 1)	61
	6.5.1	PI (octet 1)	62
	6.5.2	L3_end (octet 1)	62
	6.5.3	Endwrdr and code word no/rem encoding (octet 1)	62
	6.5.4	Control (octet 2).....	62
	6.5.5	Content	64
	6.5.6	Link supervisory messages	64
	6.5.6.1	Transmit power level control.....	65
	6.5.6.2	Reserved for future use.....	65
	6.5.6.3	Reserved for future use.....	65
	6.5.6.4	Link re-establishment	65
	6.5.6.5	Protocol initialisation (SABM), basic and extended	67
	6.5.6.6	Protocol acknowledgment (SABM_ACK), basic and extended.....	69
	6.5.6.7	Layer 2 code set shift	69

	6.5.6.7.1	Secondary service channel availability	70
	6.5.6.8	NULL message	71
	6.5.7	Fill-in	71
6.6		Link establishment and re-establishment	71
	6.6.1	Link set up from the CPP	71
	6.6.2	Link re-establishment	72
	6.6.3	Link set up from the CFP	73
	6.6.4	CFP polling	73
	6.6.5	CPP poll response	74
	6.6.6	CPP link set up and standard re-establishment diagram	75
	6.6.7	CFP link set up diagram	76
	6.6.8	Synchronous re-establishment diagram	78
6.7		Layer two link protocol set up and control	78
	6.7.1	Layer two link protocol timings	79
	6.7.2	Layer two link operation	79
	6.7.2.1	Link initialisation (see subclause 6.5.6.5)	79
	6.7.2.2	Packet transmission	80
	6.7.2.3	Packet reception	80
6.8		Location tracking of CPPs	81
	6.8.1	Polling only location tracking	82
	6.8.2	CIS assisted location tracking	82
	6.8.2.1	CIS only transmissions	83
	6.8.2.2	Combined CIS/polling transmissions	83
	6.8.2.3	Requesting the service	83
	6.8.2.4	CIS monitoring by the CPP	84
	6.8.2.5	In range indication to the user	84
7		Signalling layer three	85
	7.1	Single octet information elements	85
	7.2	Variable length information elements	86
	7.2.1	Keypad information element (KP)	88
	7.2.2	Display information element (DISP)	91
	7.2.3	Signal information element (SIG)	92
	7.2.4	Feature activation information element (FA)	94
	7.2.4.1	Use of FAs for answering incoming calls	99
	7.2.5	Feature indication information element (FI)	99
	7.2.6	Channel control information element (CC)	103
	7.2.7	Initialisation information element (INIT)	103
	7.2.8	Authentication request information element (AUTH_REQ)	104
	7.2.9	Authentication response information element (AUTH_RES)	105
	7.2.10	Terminal capabilities information element (TERM_CAP)	107
	7.2.11	Base capabilities information element (BAS_CAP)	109
	7.2.12	Character information element (CHAR)	111
	7.2.13	On-air (de-)registration acknowledge information element (OARAC)	111
	7.2.14	Parameter set information element (PAR_SET)	112
	7.2.15	Parameter request information element (PAR_REQ)	112
	7.2.16	Parameter response information element (PAR_RES)	112
	7.2.17	Alternative authentication request information element (AUTH2_REQ)	113
	7.2.18	Alternative authentication response information element (AUTH2_RES)	113
	7.2.19	Number of CPPs polled information element (NO_POLL)	113
	7.2.20	Change slot information element (CHANGE_SLOT)	114
	7.2.21	Network authentication request (NET_AUTH_REQ)	114
	7.2.22	Network authentication response (NET_AUTH_RES)	115
	7.2.23	Terminal registration data allocate information element (TRD_ALLOC)	115
	7.2.24	Key allocate information element (KEY_ALLOC)	116
	7.2.25	Location registration parameters information element (LR_PARAMS)	117
	7.2.26	Polling Lid information element (POLLING_LID)	119
	7.2.27	Data bearer capability information element (DAT_CAP)	120
	7.2.28	Data bearer response information element (DAT_RES)	121
7.3		Layer three mandatory syntax	122